

2025 SAFETY FOOTWEAR CATALOG

EVERY STEP COVERED



RED WING FOR BUSINESS



LET US HANDLE EVERY STEP

We want to make things simple for you. It starts with unsurpassed safety footwear quality, convenience and selection. Next comes expert service for building your ideal work boot program. Only Red Wing® covers you this way—every step of the way, and for the long haul. To keep your employees safe and productive in any work environment.



TABLE OF CONTENTS

RED WING FOR BUSINESS

Partner with Red Wing for your employees' safety footwear.

pg. 4 -7

NEW PRODUCTS

The latest innovations from Red Wing Shoes®, Irish Setter® and WORX® brands of footwear.

pg. 8-9

PURPOSE-BUILT SAFETY FOOTWEAR

REFERENCE

- Technology Reference
- Size Comparison Chart
- Standards and Testing

pg. 83-88

WARRANTIES

pg. 89

INDEX

pg. 90-91



OXFORD/CHUKKA

pg. 10 - 18



ATHLETIC/HIKER

pg. 19 - 23



6-INCH

pg. 24 - 43



8-9+ INCH

pg. 44 - 55




LOGGER/LINEMAN

pg. 56 - 57



PULL-ON

pg. 58 - 67



METATARSAL GUARD

pg. 68 - 72



WOMEN'S

pg. 73 - 82



RED WING FOR BUSINESS

PROTECT YOUR WORKERS. STREAMLINE SAFETY.

"Red Wing's work boot program has helped us reduce slip, trip and fall injuries by 36% and injury severity by 70%, improving employee morale and wellness."

Dennis Tarosky, President, UtiliQuest

"The enhanced platform gives employees the ease and comfort of shopping at their convenience, anytime, from anywhere they choose. Red Wing offers so many styles and options that can be curated for a specific job making it a win-win for everyone."

—Avis Johnson, Safety Administrator at UtiliQuest, LLC.

YOU NAME THE WORK. WE'VE GOT THE BOOTS.

Here today. Here tomorrow. Since 1905 we've outfitted multitudes of hardworking men and women whose labor helps build the world around us.



- Three trusted brands
- 350+ industry-specific footwear styles
- An extensive range of men's and women's safety footwear.
- Extended length and width options, plus custom fit styles
- All safety footwear meets ASTM F2413



Since 1905, the Red Wing Shoes brand has embodied the highest quality PPE.



Red Wing Shoes® branded products carry a 30-Day Unconditional Comfort Guarantee and a one-year limited warranty

Red Wing Shoes® has many work styles that are made or assembled in the **USA**.



Irish Setter offers safety footwear inspired by a 60-year legacy of building boots for the outdoor enthusiast.

Irish Setter® Work branded products carry a 6-month limited warranty.



WORX footwear delivers a fit and feel well beyond the price.

WORX® branded products carry a 6-month limited warranty.

WHEREVER WORK HAPPENS, RED WING IS THERE.

Get access to the nation's largest and most convenient distribution network.

Count on Red Wing for Business to streamline administration and provide purpose-built personal protective equipment (PPE) to help keep workers safe and comfortable on the job anywhere on the map.



In-store

- 550+ Red Wing retail stores
- 700+ authorized retailers
- Find a store near you



On-site

- 170+ mobile stores
- 17,000+ national job site visits per year



Online

- Convenient 24/7 online ordering
- Free shipping and returns
- Footwear can be shipped to any physical address within the U.S.*

*We do not ship to PO Boxes or APO/FPO



Scan QR code
for store
locations




Find the participating retailer nearest you at
redwingsafety.com/storelocator


1.800.239.1064
redwingsafety.com

EVERY JOB IS UNIQUE, EVERY FIT SHOULD BE TOO.


Years of innovation have led us to the tech-driven Ultimate Fit Experience™ —a 100% personalized approach that uses advanced technology to get your workers into the best-fitting safety footwear within your company-approved assortment. Why? Because their jobs are unique and their fit should be too.



Consult / Listen as crew members describe their job and work environment.



Scan / A 3D scanner captures 16 key foot measurements, and a pressure plate visualizes gait and pressure points.



Fit / Customized technology creates a 3D model of their feet. AI-driven results match an ideal fit within your company-approved footwear styles along with insoles, socks and aftercare products for the support and comfort they deserve – all day, every day.



Watch the video.



Unbeatable Warranty Coverage

Red Wing Shoes®, Irish Setter® Work and WORX® are backed by some of the most comprehensive limited warranties in the industry, including our 30-Day Unconditional Comfort Guarantee for Red Wing branded products. See page 89.



Lifetime Tune Up

Red Wing boots are built for toughness, performance and reliability—just like you and your crew. But we know they can take a beating, especially in extreme environments. That's why we offer a Lifetime Tune-Up Service* to help keep your workers' boots at their best.

* At participating Red Wing Stores

SIMPLIFY YOUR EXPERIENCE. DON'T SWEAT THE DETAILS.

The cornerstone of Red Wing for Business is the Red Wing Business Advantage Account. It provides secure access to a streamlined web portal that makes it easy to manage every aspect of your safety program.



Increase Safety & Reduce Risk

- Ensures compliance
- Vouchers can only be redeemed for company-approved products
- Vouchers can be activated and deactivated in real time to match employee turnover and avoid misuse
- Ensure employee health and safety with touchless delivery options




For more information, see the Red Wing Business Advantage Account overview video.



Reduce Administrative Costs

- Manage voucher distribution centrally or at multiple sites
- Distribute vouchers digitally, individually or in bulk, via email or text
- Vouchers can be coded with company subsidies, key information and footwear specs



More Options for Redemption

- In-store at 1200+ locations
- 170+ mobile stores
- Order online anytime, 24/7

Interested in a demo? Contact your Red Wing sales professional to see how Red Wing for Business can help you maximize your crew's safety and minimize your workload.

BEST



BOTH WORLDS





SUPERSOLE® X

A NEW TAKE ON A CLASSIC. MORE DURABILITY AND COMFORT AT A LOWER OVERALL WEIGHT.

SuperSole is renowned for its exceptional stability, comfort and long-lasting outsole. SuperSole X carries this legacy forward with new styles that offer even more underfoot comfort and abrasion resistance — all from a design that uses lighter materials to make you feel faster on your feet.



VERSAPRO

VERSATILE, RUGGED PERFORMANCE FOR WORKERS WORLDWIDE.

VersaPro packs high-tech durability and performance into a globally certified package, designed for a wide range of environments.

LATEST PRODUCT INNOVATION FROM IRISH SETTER® AND WORX®



WINGSHOOTER XD

Wear and not tear



Style 83668

Style 83676

Style 83884



Style 5671



CINDER

Step into success

RATINGS

TECHNOLOGIES

OXFORD / CHUKKA

Stylish protection from office
door to production floor.

TECHNOLOGIES

TECHNOLOGIES

NEW

DRAFTSMITH Men's Slip-On

3538 **AT** **PR** **SR** **EH**

UPPER: Nubuck, Waterproof and Waxed Leather

FOOTBED: Polyurethane

LAST: 704

CONSTRUCTION: Cement

CARE: Kit 6 - Waterproof Cleaner, Leather Cream, Leather Protector

RATING: ASTM F2413-18, M/I/C, EH PR, ASTM F3445-21, SR, CSA Grade 1, ESR Rated, PR

SIZES: D 6-12,13,14,15 EE 6-12,13,14,15 H 8-12,13



RATINGS



TECHNOLOGIES



L-protection
LENZI



SOLE RESISTANCE CHART

TredLucent

Oil/Gas	Better
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED

NEW

EXCELON Men's Slip-On

3093 **NT** **PR** **SR** **EH**

UPPER: Full Grain, Oiled Leather

FOOTBED: TPE

LAST: 792

CONSTRUCTION: Cement

CARE: Kit 5 - Foam Cleaner, Leather Cream, Leather Protector

RATING: ASTM F2413-24, I/C, EH, PR, SRO

SIZES: D 6-12,13,14 EE 4-12,13,14,15,16



TECHNOLOGIES



L-protection
LENZI

SOLE RESISTANCE CHART

Excelon

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED

NEW

EXCELON Men's Slip-On

3094 **NT** **PR** **SR** **EH**

UPPER: Full Grain Leather

FOOTBED: TPE

LAST: 792

CONSTRUCTION: Cement

CARE: Kit 5 - Foam Cleaner, Leather Cream, Leather Protector

RATING: ASTM F2413-24, I/C, EH, PR, SRO

SIZES: D 6-12,13,14 EE 4-12,13,14,15,16



TECHNOLOGIES



L-protection
LENZI

SOLE RESISTANCE CHART

Excelon

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED

NEW

EXCELON Men's Slip-On

3095 **NT** **PR** **SR** **SD**

UPPER: Full Grain Leather

FOOTBED: TPE

LAST: 792

CONSTRUCTION: Cement

CARE: Kit 5 - Foam Cleaner, Leather Cream, Leather Protector

RATING: ASTM F2413-24, I/C, SD35, PR, SRO

SIZES: D 6-12,13,14 EE 4-12,13,14,15,16



TECHNOLOGIES



L-protection
LENZI

SOLE RESISTANCE CHART

Excelon

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED



Puncture Resistant
Resistente a las Perforaciones



Metatarsal Guard
Protector del Metatarso



Slip Resistant
Antidérapante



Electrical Hazard
Peligro Eléctrico



Static-Dissipative
Disipador de Estática



RED WING COMFORTPRO Men's Slip-On

6705

UPPER: Nubuck Leather

FOOTBED: Nylon Covered Polyurethane SD

SHANK: Non-metallic

LAST: 224

CONSTRUCTION: Cement

RATING: ASTM F2413-18, M/I/C, SD 35, ASTM F3445-21, SR

SIZES: D 7-12,13,14,15 EE 7-12,13 H 8-12,13

TECHNOLOGIES



SOLE RESISTANCE CHART

Dual Density BLVD

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED



NEW

EXCELON Men's Oxford

3090

UPPER: Full Grain, Oiled Leather

FOOTBED: TPE

LAST: 792

CONSTRUCTION: Cement

CARE: Kit 5 - Foam Cleaner, Leather Cream, Leather Protector

RATING: ASTM F2413-24, I/C, SD35, PR, SRO

SIZES: D 6-12,13,14 EE 4-12,13,14,15,16

TECHNOLOGIES



SOLE RESISTANCE CHART

Excelon

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED



NEW

EXCELON Men's Oxford

3091

UPPER: Full Grain Leather

FOOTBED: TPE

LAST: 792

CONSTRUCTION: Cement

CARE: Kit 5 - Foam Cleaner, Leather Cream, Leather Protector

RATING: ASTM F2413-24, I/C, EH, PR, SRO

SIZES: D 6-12,13,14 EE 4-12,13,14,15,16

TECHNOLOGIES



SOLE RESISTANCE CHART

Excelon

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED



NEW

EXCELON Men's Oxford

3092

UPPER: Full Grain Leather

FOOTBED: TPE

LAST: 792

CONSTRUCTION: Cement

CARE: Kit 5 - Foam Cleaner, Leather Cream, Leather Protector

RATING: ASTM F2413-24, I/C, EH, PR, SRO

SIZES: D 6-12,13,14 EE 4-12,13,14,15,16

TECHNOLOGIES



SOLE RESISTANCE CHART

Excelon

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED

Steel Toe
Puntera de Acero

Aluminum Toe
Puntera de Aluminio

Non-Metallic Toe
Puntera No Metálica

Waterproof
Impermeable

Insulated
Con Aislamiento



RED WING ECOLITE Men's Athletic

2286

UPPER: Polyester Mesh
FOOTBED: Removable EVA
LAST: 305
CONSTRUCTION: Cement

RATING: ASTM F2413-18, M/I/C, EH PR, ASTM F3445-21, SR, CSA Grade 1, ESR Rated, PR
SIZES: D 6-12,13,14,15 EE 6-12,13,14,15 H 8-12,13,14

RATINGS



TECHNOLOGIES



L-protection
LENZI



SOLE RESISTANCE CHART

ReSurge

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED



RED WING DRAFTSMITH Men's Oxford

2182

UPPER: Full Grain, Oiled and Waxed Leather
FOOTBED: Polyurethane
LAST: 704
CONSTRUCTION: Cement

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR
SIZES: D 6-12,13,14,15 EE 6-12,13,14,15 H 8-12,13,14,15

TECHNOLOGIES



SOLE RESISTANCE CHART

TredLucent

Oil/Gas	Better
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED



RED WING ECOLITE Men's Athletic

2281

UPPER: Polyester Mesh
FOOTBED: Removable EVA
LAST: 305
CONSTRUCTION: Cement

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR
SIZES: D 6-12,13,14,15 EE 6-12,13,14,15 H 8-12,13,14

TECHNOLOGIES



SOLE RESISTANCE CHART

ReSurge

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED



RED WING ECOLITE Men's Athletic

2282

UPPER: Polyester Mesh
FOOTBED: Removable EVA
LAST: 305
CONSTRUCTION: Cement

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR
SIZES: D 6-12,13,14,15 EE 6-12,13,14,15 H 8-12,13,14

TECHNOLOGIES



SOLE RESISTANCE CHART

ReSurge

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED

PR Puncture Resistant
Resistente a las Perforaciones

MT Metatarsal Guard
Protector del Metatarso

SR Slip Resistant
Antidérapante

EH Electrical Hazard
Peligro Eléctrico

SD Static-Dissipative
Disipador de Estática



RED WING COMFORTPRO Men's Oxford

6708

UPPER: Nubuck Leather

FOOTBED: Nylon Covered Polyurethane SD

SHANK: Non-metallic

LAST: 224

CONSTRUCTION: Cement

RATING: ASTM F2413-18, M/I/C, SD 35, ASTM F3445-21, SR

SIZES: D 7-12,13,14,15 EE 8-12,13 H 8-12,13

TECHNOLOGIES



SOLE RESISTANCE CHART

Dual Density BLVD

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED



RED WING TRACTION TRED LITE Men's Chukka

2461

UPPER: Full Grain, Waterproof & Waxed Leather

FOOTBED: Polyurethane

SHANK: None

LAST: 325

CONSTRUCTION: Welt

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR

SIZES: D 7-12,13,14,15 EE 8-12,13,14 H 8-12

TECHNOLOGIES



SOLE RESISTANCE CHART

LiteTred

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED



RED WING DRAFTSMITH Men's Chukka

2180

UPPER: Full Grain, Oiled and Waxed Leather

FOOTBED: Polyurethane

LAST: 722

CONSTRUCTION: Cement

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR

SIZES: D 6-12,13,14,15 EE 6-12,13,14,15 H 6-12,13,14,15

TECHNOLOGIES



SOLE RESISTANCE CHART

TredLucent

Oil/Gas	Better
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED



RED WING TRACTION TRED LITE Men's Chelsea

2448

UPPER: Full Grain, Waterproof and Oiled Leather

FOOTBED: Removable Polyurethane

SHANK: None

LAST: C325

CONSTRUCTION: Welt

RATING: ASTM F2413-18, M/I/C, EH PR, ASTM F3445-21, SR, CSA Grade 1, ESR Rated, PR

SIZES: D 7-12,13,14,15 EE 8-12,13,14 H 8-12

RATINGS

TECHNOLOGIES



SOLE RESISTANCE CHART

LiteTred

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED

Steel Toe
Puntera de Acero

Aluminum Toe
Puntera de Aluminio

Non-Metallic Toe
Puntera No Metálica

Waterproof
Impermeable

Insulated
Con Aislamiento



RED WING TRACTION TRED LITE Men's Chelsea

2446

UPPER: Nubuck, Waterproof and Oiled Leather

FOOTBED: Removable Polyurethane

SHANK: None

LAST: C325

CONSTRUCTION: Welt

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR

SIZES: D 7-12,13,14,15 EE 8-12,13,14 H 8-12

TECHNOLOGIES



SOLE RESISTANCE CHART

LiteTred

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED



IRISH SETTER WORK NISSWA Men's Oxford

83126

UPPER: Abrasion Resistant Mesh, TPU-Infused Nylon

FOOTBED: Removable Memory Foam-EVA

SHANK: None

LAST: 221

CONSTRUCTION: Cement

RATING: ASTM F2413-18, M/I/C, EH PR, ASTM F3445-21, SR, CSA Grade 1, ESR Rated, PR

SIZES: D 6-12,13,14,15 EE 7-12,13,14

RATINGS




TECHNOLOGIES



SOLE RESISTANCE CHART

Vibram® Beehive

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED



IRISH SETTER WORK NISSWA Men's Oxford

83120

UPPER: Abrasion Resistant Mesh, TPU-Infused Nylon

FOOTBED: Removable Memory Foam-EVA

SHANK: None

LAST: 221

CONSTRUCTION: Cement

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR

SIZES: D 6-12,13,14,15 EE 7-12,13,14

TECHNOLOGIES



SOLE RESISTANCE CHART

Vibram® Beehive

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED



NEW

IRISH SETTER WORK NISSWA Men's Oxford

83130

UPPER: TPU-Infused Abrasion Resistant Nylon

FOOTBED: EVA with Memory Foam

SHANK: None

LAST: 231

CONSTRUCTION: Cement

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR

SIZES: D 6-12,13,14,15 EE 7-12,13,14

TECHNOLOGIES



SOLE RESISTANCE CHART

Vibram® Beehive

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED



Puncture Resistant
Resistente a las Perforaciones



Metatarsal Guard
Protector del Metatarso



Slip Resistant
Antidérapante



Electrical Hazard
Peligro Eléctrico



Static-Dissipative
Disipador de Estática



NEW **WORX ESSENTIALS Men's Slip-On**
5080 **ST** **SR** **EH**
UPPER: Full Grain, Waterproof and Waxed Leather
FOOTBED: TPE
LAST: 882-CH
CONSTRUCTION: Cement
RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR
SIZES: M 7-12,13,14 WW 8-12,13,14



SOLE RESISTANCE CHART	
EssentialsLite EH	
Oil/Gas	Best
Chemicals	Best
Abrasions	Better
Heat	Better
Non-Marking	Yes



GLOBALLY SOURCED



NEW **WORX ESSENTIALS Men's Slip-On**
5057 **ST** **SR** **SD**
UPPER: Full Grain, Waterproof and Waxed Leather
FOOTBED: TPE
LAST: 882-CH
CONSTRUCTION: Cement
RATING: ASTM F2413-18, M/I/C, SD 35, ASTM F3445-21, SR
SIZES: M 7-12,13,14 WW 8-12,13,14



SOLE RESISTANCE CHART	
EssentialsLite SD	
Oil/Gas	Best
Chemicals	Best
Abrasions	Better
Heat	Better
Non-Marking	Yes



GLOBALLY SOURCED



WORX ANTIMATTER Men's Athletic
5494 **AT** **SR** **PR** **EH**
UPPER: PU Coated Leather and Nylon Mesh
FOOTBED: Removable Polyurethane
LAST: 305
CONSTRUCTION: Cement
RATING: ASTM F2413-18, M/I/C, EH PR, ASTM F3445-21, SR, CSA Grade 1, ESR Rated, PR
SIZES: M 7-12,13,14 WW 8-12,13,14



SOLE RESISTANCE CHART	
CrossGrip	
Oil/Gas	Best
Chemicals	Best
Abrasions	Better
Heat	Better
Non-Marking	Yes



GLOBALLY SOURCED



WORX ANTIMATTER Men's Athletic
5050 **ST** **SR** **EH**
UPPER: PU Coated Leather and Nylon Mesh
FOOTBED: Removable Polyurethane
LAST: 305
CONSTRUCTION: Cement
RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR
SIZES: M 7-12,13,14 WW 8-12,13,14

SOLE RESISTANCE CHART	
CrossGrip	
Oil/Gas	Best
Chemicals	Better
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED



WORX NITRO Men's Oxford

5059 **ST** **SR** **EH**

UPPER: Full Grain, Oiled and Waxed Leather

FOOTBED: Polyurethane

SHANK: Fiberglass

LAST: 207JV

CONSTRUCTION: Cement

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR

SIZES: M 7-12,13,14 WW 8-12,13,14

SOLE RESISTANCE CHART

GumTek

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes



LOCALLY SOURCED



NEW

WORX ESSENTIALS Men's Oxford

5940 **ST** **PR** **SR** **EH**

UPPER: Full Grain, Waterproof and Waxed Leather

FOOTBED: TPE

SHANK: Fiberglass

LAST: 882-CH

CONSTRUCTION: Cement

RATING: ASTM F2413-18, M/I/C, EH PR, ASTM F3445-21, SR, CSA Grade 1, ESR Rated, PR

SIZES: M 7-12,13,14 WW 8-12,13,14

RATINGS



TECHNOLOGIES



SOLE RESISTANCE CHART

EssentialsLite EH

Oil/Gas	Best
Chemicals	Best
Abrasions	Better
Heat	Better
Non-Marking	Yes



LOCALLY SOURCED



NEW

WORX ESSENTIALS Men's Oxford

5058 **ST** **SR** **SD**

UPPER: Full Grain Waxed Leather

FOOTBED: TPE

SHANK: Fiberglass

LAST: 882-CH

CONSTRUCTION: Cement

RATING: ASTM F2413-18, M/I/C, SD 35, ASTM F3445-21, SR

SIZES: M 7-12,13,14 WW 8-12,13,14

TECHNOLOGIES



SOLE RESISTANCE CHART

EssentialsLite SD

Oil/Gas	Best
Chemicals	Best
Abrasions	Better
Heat	Better
Non-Marking	Yes



LOCALLY SOURCED



WORX ANTIMATTER Men's Athletic

5497 **ST** **SR** **SD**

UPPER: Polyester Mesh

FOOTBED: Polyurethane

SHANK: None

LAST: 305

CONSTRUCTION: Cement

RATING: ASTM F2413-18, M/I/C, SD 35, ASTM F3445-21, SR

SIZES: M 7-12,13,14 WW 8-12,13,14

SOLE RESISTANCE CHART

CrossGrip

Oil/Gas	Best
Chemicals	Better
Abrasions	Best
Heat	Best
Non-Marking	Yes



LOCALLY SOURCED



Puncture Resistant
Resistente a las Perforaciones



Metatarsal Guard
Protector del Metatarso



Slip Resistant
Antidérapante



Electrical Hazard
Peligro Eléctrico



Static-Dissipative
Disipador de Estática



WORX COPPER Men's Oxford

6550   

UPPER: PU Coated Leather

FOOTBED: Removable Polyurethane

SHANK: Non-metallic

LAST: 882

CONSTRUCTION: Cement

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR

SIZES: M 7-12,13,14,15 WW 8-12,13,14,15

SOLE RESISTANCE CHART

SSRT Diamond

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Good
Non-Marking	Yes



GLOBALLY SOURCED



WORX ZINC Men's Chukka

5427   

UPPER: Full Grain Leather

FOOTBED: Removable Polyurethane with Memory Foam

LAST: 207JV

CONSTRUCTION: Cement

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR

SIZES: M 7-12,13,14 WW 8-12,13,14

TECHNOLOGIES



SOLE RESISTANCE CHART

StarGrip® Channel

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED



WORX COPPER Men's Chukka

6513   

UPPER: PU Coated Leather

FOOTBED: Removable EVA

SHANK: Non-metallic

LAST: 882

CONSTRUCTION: Cement

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR

SIZES: M 5-12,13,14,15,16 WW 8-12,13

TECHNOLOGIES



SOLE RESISTANCE CHART

Bid Rubber Cup

Oil/Gas	Good
Chemicals	Better
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED



WORX NITRO Men's Chukka

5496   

UPPER: Full Grain, Oiled and Waxed Leather

FOOTBED: Polyurethane

SHANK: Fiberglass

LAST: 207JV

CONSTRUCTION: Cement

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR

SIZES: M 7-12,13,14 WW 8-12,13,14

SOLE RESISTANCE CHART

GumTek

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED

ATHLETIC / HIKER

Multisport looks and agility meet superior safety features.

RATINGS TECHNOLOGIES

RED WING SHIELDLITE ATHLETICS Men's Athletic

3259 **NT** **SR** **PR** **EH**

UPPER: Abrasion Resistant Nylon

FOOTBED: Removable Polyurethane

LAST: A1041

CONSTRUCTION: Direct Attach

RATING: ASTM F2413-18, M/I/C, EH PR, ASTM F3445-21, SR

CSA Grade 1, ESR Rated, PR

EN ISO 20345:2011 SB P E WRU FO SRC

SIZES: 35,36,37,38,39,40,41,42,43,44,45,46,47,48

RATINGS

TECHNOLOGIES



L-protection
LENZI

PERSPAIR

SOLE RESISTANCE CHART

ReboundFlex

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Good
Non-Marking	Yes



GLOBALLY SOURCED



RED WING SHIELDLITE ATHLETICS Men's Athletic

3295 **NT** **SR** **PR** **EH**

UPPER: Abrasion Resistant Nylon

FOOTBED: Removable Polyurethane

LAST: A1041

CONSTRUCTION: Direct Attach

RATING: ASTM F2413-18, M/I/C, EH PR, ASTM F3445-21, SR

CSA Grade 1, ESR Rated, PR

EN ISO 20345:2011 SB P E WRU FO SRC

SIZES: 35,36,37,38,39,40,41,42,43,44,45,46,47,48

RATINGS

TECHNOLOGIES



L-protection
LENZI

PERSPAIR

SOLE RESISTANCE CHART

ReboundFlex

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Good
Non-Marking	Yes



GLOBALLY SOURCED



RED WING ATHLETICS Men's Athletic

6338 **AT** **SR** **EH**

UPPER: Abrasion Resistant Mono-Mesh

FOOTBED: Nylon Covered Open Cell Foam

SHANK: Nylon

LAST: 305

CONSTRUCTION: Cement

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR

SIZES: D 7-12,13,14,15 EE 7-12,13,14,15 H 8-12,13

TECHNOLOGIES



SOLE RESISTANCE CHART

Rubber-EVA Stealth

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED



Puncture Resistant
Resistente a las Perforaciones



Metatarsal Guard
Protector del Metatarso



Slip Resistant
Antidérapante



Electrical Hazard
Peligro Eléctrico



Static-Dissipative
Disipador de Estática

**RED WING COOLTECH™ ATHLETICS Men's Athletic****6343** NT SR EH

UPPER: Abrasion Resistant Mesh

FOOTBED: Fabric Covered EVA

LAST: 305

CONSTRUCTION: Cement

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR

SIZES: D 7-12,13,14,15 EE 7-12,13,14,15 H 8-12,13,14

TECHNOLOGIES



SOLE RESISTANCE CHART

Vibram® SpeedSole

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED

**RED WING COOLTECH™ ATHLETICS Men's Athletic****6344** NT SR EH

UPPER: Abrasion Resistant Mesh

FOOTBED: Fabric Covered EVA

LAST: 305

CONSTRUCTION: Cement

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR

SIZES: D 7-12,13,14,15 EE 7-12,13,14,15 H 8-12,13,14

TECHNOLOGIES



SOLE RESISTANCE CHART

Vibram® SpeedSole

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED

**RED WING COOLTECH™ ATHLETICS Men's Athletic****6352** NT SR EH

UPPER: Abrasion Resistant Mesh

FOOTBED: Fabric Covered EVA

LAST: 305

CONSTRUCTION: Cement

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR

SIZES: D 7-12,13,14,15 EE 7-12,13,14,15 H 8-12,13,14

TECHNOLOGIES



SOLE RESISTANCE CHART

Vibram® SpeedSole

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED

**RED WING COOLTECH™ ATHLETICS Men's 4-inch Hiker Boot****6349** NT SR EH

UPPER: Full Grain, Waterproof Leather and Abrasion Resistant Mesh

FOOTBED: Fabric Covered EVA

LAST: 305

CONSTRUCTION: Cement

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR

SIZES: D 7-12,13,14,15 EE 7-12,13,14,15 H 8-12,13,14

TECHNOLOGIES



SOLE RESISTANCE CHART

Vibram® SpeedSole

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED

ST Steel Toe
Puntera de Acero

AT Aluminum Toe
Puntera de Aluminio

NT Non-Metallic Toe
Puntera No Metálica

 Waterproof
Impermeable

 Insulated
Con Aislamiento

**RED WING ECOLITE Men's 4-inch Hiker Boot****2283** AT SR EH

UPPER: Polyester Mesh
 FOOTBED: Removable EVA
 LAST: 305
 CONSTRUCTION: Cement

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR
 SIZES: D 6-12,13,14,15 EE 6-12,13,14,15 H 8-12,13,14

TECHNOLOGIES



SOLE RESISTANCE CHART

ReSurge

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED

**RED WING APEX Men's 5-inch Boot****2129** AT SR EH

UPPER: Nubuck, Waterproof and Oiled Leather and Polyester Mesh
 FOOTBED: EVA
 SHANK: TPU
 LAST: 305
 CONSTRUCTION: Cement

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR
 SIZES: D 6-12,13,14,15 EE 6-12,13,14,15 H 8-12,13,14

TECHNOLOGIES



SOLE RESISTANCE CHART

ReGripDLT

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED

**RED WING TRADESMAN Men's 5-Inch Hiker Boot****6614** NT SR EH

UPPER: Full Grain, Waterproof and Waxed Leather and Abrasion Resistant Mesh
 FOOTBED: Removable Polyurethane
 SHANK: Nylon
 LAST: 601
 CONSTRUCTION: Direct Attach

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR
 SIZES: D 6-12,13,14,15,16 EE 6-12,13,14,15 H 8-12,13,14

TECHNOLOGIES



SOLE RESISTANCE CHART

VersaTrax

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED

**RED WING TRUHIKER Men's 5-inch Hiker Boot****6692** AT EH

UPPER: Full Grain, Waterproof Leather
 FOOTBED: Removable Polyurethane
 SHANK: Nylon
 LAST: 228
 CONSTRUCTION: Cement

RATING: ASTM F2413-18, M/I/C, EH
 SIZES: D 8-12,13 EE 7-12,13

SOLE RESISTANCE CHART

Rubber Ranger

Oil/Gas	Good
Chemicals	Best
Abrasions	Best
Heat	Better
Non-Marking	Yes



GLOBALLY SOURCED



NEW

IRISH SETTER WORK CASCADE Men's 5-inch Hiker Boot

83678 AT SR EH

UPPER: Full Grain, Waterproof Leather, TPU-Infused Nylon and Abrasion-Resistant Mesh

FOOTBED: Removable EVA

LAST: 221

CONSTRUCTION: Cement

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR

SIZES: D 8-12,13,14 EE 8-12,13

TECHNOLOGIES



SOLE RESISTANCE CHART

Vibram® Bayu

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED



IRISH SETTER WORK CASCADE Men's 5-inch Hiker Boot

83680 AT SR EH

UPPER: Full Grain, Waterproof Leather and Abrasion Resistant Mesh, TPU-Infused Nylon

FOOTBED: Removable EVA

SHANK: TPU

LAST: 221

CONSTRUCTION: Cement

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR

SIZES: D 8-12,13,14 EE 8-12,13

TECHNOLOGIES



SOLE RESISTANCE CHART

Vibram® Bayu

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED



IRISH SETTER WORK CASCADE Men's 5-inch Hiker Boot

83684 AT SR EH

UPPER: Full Grain, Waterproof Leather, Abrasion Resistant Mesh and TPU-Infused Nylon

FOOTBED: Removable EVA

SHANK: TPU

LAST: 221

CONSTRUCTION: Cement

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR

SIZES: D 8-12,13,14 EE 8-12,13

TECHNOLOGIES



SOLE RESISTANCE CHART

Vibram® Bayu

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED



NEW

IRISH SETTER WORK NISSWA Men's Hiking Boot

83440 NT SR EH

UPPER: TPU-Infused Abrasion Resistant Nylon

FOOTBED: EVA with Memory Foam

LAST: 231

CONSTRUCTION: Cement

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR

SIZES: D 6-12,13,14,15 EE 7-12,13,14

TECHNOLOGIES




SOLE RESISTANCE CHART

Vibram® Beehive

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED



**WORX CARBIDE Men's Athletic****5007** **AT** **SR** **EH****UPPER:** PU Coated Leather and Nylon Mesh**FOOTBED:** Removable Polyurethane**SHANK:** Non-metallic**LAST:** 228**CONSTRUCTION:** Cement**RATING:** ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR**SIZES:** M 7-12,13,14,15 WW 8-12,13,14**SOLE RESISTANCE CHART****Rubber-EVA Viper**

Oil/Gas	Good
Chemicals	Best
Abrasions	Best
Heat	Good
Non-Marking	No



GLOBALLY SOURCED

**WORX CARBIDE Men's Athletic****5010** **AT** **SR** **EH****UPPER:** PU Coated Leather and Nylon Mesh**FOOTBED:** Removable Polyurethane**SHANK:** Non-metallic**LAST:** 228**CONSTRUCTION:** Cement**RATING:** ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR**SIZES:** M 7-12,13,14,15 WW 8-12,13,14**SOLE RESISTANCE CHART****Rubber-EVA Viper**

Oil/Gas	Good
Chemicals	Best
Abrasions	Best
Heat	Good
Non-Marking	No



GLOBALLY SOURCED

**NEW****WORX ANTIMATTER Men's Hiker****5495** **ST** **SR** **EH****UPPER:** PU Coated Leather**FOOTBED:** Polyurethane**LAST:** 305**CONSTRUCTION:** Cement**RATING:** ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR**SIZES:** M 7-12,13,14 WW 8-12,13,14**SOLE RESISTANCE CHART****CrossGrip**

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	No



GLOBALLY SOURCED

**WORX COBALT Men's 5-inch Hiker Boot****5501** **ST** **SR** **EH****UPPER:** Nubuck, Oiled Leather**FOOTBED:** Removable Polyurethane**SHANK:** Non-metallic**LAST:** 882**CONSTRUCTION:** Cement**RATING:** ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR**SIZES:** M 6-12,13,14,15,16 WW 8-12,13,14,15,16

TECHNOLOGIES

**SOLE RESISTANCE CHART****Rubber-PU Falcon**

Oil/Gas	Best
Chemicals	Better
Abrasions	Best
Heat	Best
Non-Marking	No



GLOBALLY SOURCED

PR Puncture Resistant
Resistente a las Perforaciones**MT** Metatarsal Guard
Protector del Metatarso**SR** Slip Resistant
Antidérapante**EH** Electrical Hazard
Peligro Eléctrico**SD** Static-Dissipative
Disipador de Estática

6-INCH BOOTS

All-day comfort and performance on and off the job.



RED WING DYNAFORCE Men's 6-inch Boot

4404    

UPPER: Nubuck, Waterproof, Oiled and Waxed Leather

FOOTBED: ComfortForce

SHANK: Non-metallic

LAST: 694

CONSTRUCTION: SuperSole® Welt

RATING: ASTM F2413-18, M/VC, EH

SIZES: D 7-12,13,14,15 EE 7-12,13,14 H 8-12,13,14

TECHNOLOGIES



Steel Toe
Puntera de Acero



Aluminum Toe
Puntera de Aluminio



Non-Metallic Toe
Puntera No Metálica



Waterproof
Impermeable



Insulated
Con Aislamiento

SOLE RESISTANCE CHART

Horizon™ DL SuperSole®

Oil/Gas	Best
Chemicals	Better
Abrasions	Better
Heat	Good
Non-Marking	Yes



ASSEMBLED
IN THE  IMPORTED
COMPONENTS


RED WING TRACTION TRED LITE Men's 6-inch Boot
2475 **NT** **PR** **SR** **EH**
UPPER: Nubuck, Waterproof, Oiled and Waxed Leather

FOOTBED: Polyurethane

SHANK: None

LAST: 325

CONSTRUCTION: Welt

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR

SIZES: D 7-12,13,14,15 EE 8-12,13,14 H 8-12

TECHNOLOGIES

SOLE RESISTANCE CHART
LiteTred

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED


RED WING TRUHIKER Men's 6-inch Hiker Boot
3561 **ST** **PR** **SR** **EH**
UPPER: Suede, Waterproof Leather

FOOTBED: Removable EVA

SHANK: Nylon

LAST: 220

CONSTRUCTION: Cement

RATING: ASTM F2413-18, M/I/C, EH PR, ASTM F3445-21, SR


CSA Grade 1, ESR Rated, PR
SIZES: D 8-12,13,14 EE 8-12,13

RATINGS

TECHNOLOGIES

SOLE RESISTANCE CHART
Rubber-EVA Xplorer

Oil/Gas	Best
Chemicals	Best
Abrasions	Better
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED


RED WING SUPERSOLE® 2.0 Men's 6-inch Boot
3504 **ST** **PR** **SR** **EH**
UPPER: Full Grain, Waterproof Leather

FOOTBED: ComfortForce

SHANK: Fiberglass

LAST: 694

CONSTRUCTION: Dual Density SuperSole® Welt

RATING: ASTM F2413-18, M/I/C, EH PR, ASTM F3445-21, SR

CSA Grade 1, ESR Rated, PR
SIZES: B 10-12,13,14 D 7-12,13,14,15 E 8-12,13 EEE 8-12,13

RATINGS

TECHNOLOGIES

SOLE RESISTANCE CHART
Aztec SuperSole® 2.0

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Good
Non-Marking	Yes


RED WING EXOS LITE Men's 6-inch Boot
2452 **AT** **PR** **SR** **EH**
UPPER: Nubuck, Waterproof, Oiled and Waxed Leather and Nylon Mesh

FOOTBED: Removable Polyurethane

SHANK: Nylon

LAST: JV305

CONSTRUCTION: Cement

RATING: ASTM F2413-18, M/I/C, EH PR, ASTM F3445-21, SR

CSA Grade 1, ESR Rated, PR
SIZES: D 6-12,13,14,15 EE 6-12,13,14,15 H 8-12,13

RATINGS

TECHNOLOGIES

SOLE RESISTANCE CHART
Vibram® X-treme Lite

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Better
Non-Marking	Yes



GLOBALLY SOURCED

PR Puncture Resistant
Resistente a las Perforaciones

MT Metatarsal Guard
Protector del Metatarso

SR Slip Resistant
Antidérapante

EH Electrical Hazard
Peligro Eléctrico

SD Static-Dissipative
Disipador de Estática


RED WING APEX Men's 6-inch Boot
3574 AT PR SR

UPPER: Nubuck, Waterproof, Oiled and Waxed Leather and Polyester Mesh

FOOTBED: EVA

SHANK: TPU

LAST: 305

CONSTRUCTION: Cement

RATING: ASTM F2413-18, M/I/C, EH PR, ASTM F3445-21, SR

CSA Grade 1, ESR Rated, PR
SIZES: D 6-12,13,14,15 EE 6-12,13,14,15 H 8-12,13,14

RATINGS

TECHNOLOGIES

L-protection
LENZI

SOLE RESISTANCE CHART
ReGripDLT

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED


RED WING KING TOE Men's 6-inch Boot
3506 NT PR SR

UPPER: Full Grain, Waterproof Leather

FOOTBED: Nylon Covered Polyurethane

SHANK: Non-metallic

LAST: 800

CONSTRUCTION: Direct Attach

RATING: ASTM F2413-18, M/I/C, EH PR, ASTM F3445-21, SR

CSA Grade 1, ESR Rated, PR
SIZES: D 7-12,13,14,15 EE 8-12,13,14 H 8-12,13

RATINGS

TECHNOLOGIES

SOLE RESISTANCE CHART
**Vibram® Galactic
Fire and Ice**

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED


RED WING TRADESMAN Men's 6-inch Boot
3519 NT PR SR

UPPER: Nubuck, Waterproof and Waxed Leather

FOOTBED: Removable Polyurethane

LAST: 601

CONSTRUCTION: Direct Attach

RATING: ASTM F2413-18, M/I/C, EH PR, ASTM F3445-21, SR

CSA Grade 1, ESR Rated, PR
SIZES: D 6-12,13,14,15,16 EE 6-12,13,14,15 H 8-12,13,14

RATINGS

TECHNOLOGIES

L-protection
LENZI

SOLE RESISTANCE CHART
VersaTrax

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED


RED WING TRADESMAN Men's 6-inch Boot
3532 NT PR SR

UPPER: Full Grain, Waterproof and Waxed Leather and Abrasion Resistant Mesh

FOOTBED: Removable Polyurethane

LAST: 601

CONSTRUCTION: Direct Attach

RATING: ASTM F2413-18, M/I/C, EH PR, ASTM F3445-21, SR

CSA Grade 1, ESR Rated, PR
SIZES: D 6-12,13,14,15,16 EE 6-12,13,14,15 H 8-12,13,14

RATINGS

TECHNOLOGIES

L-protection
LENZI

SOLE RESISTANCE CHART
VersaTrax

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED

NEW

TRACTION TRED LITE Men's 6-inch Boot**3582** NT    

UPPER: Nubuck, Waterproof Leather and Abrasion Resistant Mesh

FOOTBED: Removable Polyurethane

SHANK: Nylon

LAST: 325

CONSTRUCTION: Welt

CARE: Kit 7 - Roughout/Nubuck Cleaner Kit

RATING: ASTM F2413-18, M/I/C, EH PR, ASTM F3445-21, SR, CSA Grade 1, ESR Rated, PR

SIZES: D 7-12,13,14,15 EE 8-12,13,14 H 8-12

RATINGS

TECHNOLOGIES



SWEN-FLEX®



SOLE RESISTANCE CHART

LiteTred DH

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED

NEW

TRACTION TRED LITE Men's 6-inch Boot**3583** NT    

UPPER: Nubuck, Waterproof Leather and Abrasion Resistant Mesh

FOOTBED: Removable Polyurethane

LAST: 325

CONSTRUCTION: Welt

CARE: Kit 7 - Roughout/Nubuck Cleaner Kit

RATING: ASTM F2413-18, M/I/C, EH PR, ASTM F3445-21, SR, CSA Grade 1, ESR Rated, PR

SIZES: D 7-12,13,14,15 EE 8-12,13,14 H 8-12

RATINGS

TECHNOLOGIES



SWEN-FLEX®



SOLE RESISTANCE CHART

LiteTred

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED

RED WING VERSAPRO Men's 6-inch Boot**3029** NT    

UPPER: Nubuck, Waterproof Leather and Abrasion Resistant Nylon

FOOTBED: Polyurethane

SHANK: Nylon

LAST: 692

CONSTRUCTION: Direct Attach

RATING: ASTM F2413-18, M/I/C, SD 35 PR, ASTM F3445-21, SR

CSA Grade 1, ESR Rated, PR

SIZES: D 6-12,13,14 EE 6-12,13,14

RATINGS

TECHNOLOGIES



L-protection® LENZI



SOLE RESISTANCE CHART

Galvanext SD

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED

RED WING KING TOE Men's 6-inch Boot**2260** NT     400 Gram

UPPER: Nubuck, Waterproof and Waxed Leather

FOOTBED: Nylon Covered Polyurethane

SHANK: Non-metallic

LAST: 800

CONSTRUCTION: Direct Attach

RATING: ASTM F2413-18, M/I/C, EH

SIZES: D 7-12,13,14,15 EE 7-12,13,14 H 8-12,13

3M Thinsulate Ultra
INSULATION
400 gramR | W
LEATHER

KING TOE®



SOLE RESISTANCE CHART

TPU-PU Galaxy

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Good
Non-Marking	Yes



GLOBALLY SOURCED

PR Puncture Resistant
Resistente a las Perforaciones**MT** Metatarsal Guard
Protector del Metatarso**SR** Slip Resistant
Antidérapante**EH** Electrical Hazard
Peligro Eléctrico**SD** Static-Dissipative
Disipador de Estática

**RED WING DYNAFORCE Men's 6-inch Boot****4215**   **UPPER:** Nubuck, Waterproof, Oiled and Waxed Leather**FOOTBED:** ComfortForce**SHANK:** Non-metallic**LAST:** 694**CONSTRUCTION:** SuperSole® Welt**RATING:** ASTM F2413-18, M/I/C, EH**SIZES:** B 10-12,13,14 D 7-12,13,14,15 EE 7-12,13,14 H 8-12,13,14

TECHNOLOGIES



SOLE RESISTANCE CHART

Horizon™ DL SuperSole®

Oil/Gas	Best
Chemicals	Better
Abrasions	Better
Heat	Good
Non-Marking	Yes

ASSEMBLED
IN THE **USA** W/IMPORTED
COMPONENTS**RED WING TRUHIKER Men's 6-inch Hiker Boot****6670**    **UPPER:** Suede, Waterproof Leather**FOOTBED:** Removable EVA**SHANK:** Nylon**LAST:** 220**CONSTRUCTION:** Cement**RATING:** ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR**SIZES:** D 8-12,13,14 EE 8-12,13

TECHNOLOGIES



SOLE RESISTANCE CHART

Rubber-EVA Xplorer

Oil/Gas	Best
Chemicals	Best
Abrasions	Better
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED

**RED WING APEX Men's 6-inch Boot****2144**    **UPPER:** Nubuck, Waterproof and Oiled Leather and Polyester Mesh**FOOTBED:** Removable EVA**SHANK:** TPU**LAST:** 305**CONSTRUCTION:** Cement**RATING:** ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR**SIZES:** D 6-12,13,14,15 EE 6-12,13,14,15 H 8-12,13,14

TECHNOLOGIES



SOLE RESISTANCE CHART

ReGripDLT

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED

**RED WING APEX Men's 6-inch Boot****2146**    **UPPER:** Nubuck, Waterproof Leather and Polyester Mesh**FOOTBED:** Removable EVA**SHANK:** TPU**LAST:** 305**CONSTRUCTION:** Cement**RATING:** ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR**SIZES:** D 6-12,13,14,15 EE 6-12,13,14,15 H 8-12,13,14

TECHNOLOGIES



SOLE RESISTANCE CHART

ReGripDLT

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED

 **Steel Toe**
Puntera de Acero **Aluminum Toe**
Puntera de Aluminio **Non-Metallic Toe**
Puntera No Metálica **Waterproof**
Impermeable **Insulated**
Con Aislamiento


RED WING FLEXFORCE Men's 6-inch Boot
2401 AT SR EH

UPPER: Full Grain, Waterproof Leather

FOOTBED: Nylon Covered Polyurethane

SHANK: Non-metallic

LAST: 157

CONSTRUCTION: Cement to Welt

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR

SIZES: B 9-12,13,14 D 7-12,13,14,15 EE 8-12,13,14 H 8-12,13,14

TECHNOLOGIES

SOLE RESISTANCE CHART
Vibram® Rubber-PU
XClaim TC-4 Plus

Oil/Gas	Best
Chemicals	Better
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED


RED WING EXOS LITE Men's 6-inch Boot
2453 AT SR EH

UPPER: Nubuck, Waterproof and Waxed Leather

FOOTBED: Removable Polyurethane

SHANK: Nylon

LAST: JV305

CONSTRUCTION: Cement

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR

SIZES: D 6-12,13,14,15 EE 6-12,13,14,15 H 8-12,13

TECHNOLOGIES

SOLE RESISTANCE CHART
Vibram® X-treme Lite

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Better
Non-Marking	Yes



GLOBALLY SOURCED


RED WING TRUHIKER Men's 6-inch Hiker Boot
6674 AT SR EH

UPPER: Nubuck, Waterproof and Waxed Leather

FOOTBED: Nylon Covered Polyurethane

SHANK: Steel

LAST: 221

CONSTRUCTION: Cement

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR

SIZES: B 10-12,13,14 D 7-12,13,14,15 EE 8-12,13,14

TECHNOLOGIES

SOLE RESISTANCE CHART
Vibram® Summit
TC-4 Plus

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED


RED WING BRNR XP Men's 6-inch Boot
2400 NT SR EH

UPPER: Full Grain, Waterproof Leather

FOOTBED: Quadrex V2 Multi-Layer System

SHANK: Fiberglass

LAST: 687

CONSTRUCTION: Direct Attach to Welt

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR

SIZES: D 7-12,13,14,15 EE 7-12,13,14,15 H 8-12,13

TECHNOLOGIES

SOLE RESISTANCE CHART
Dual Density GripTek

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes



ASSEMBLED IN THE USA WITH IMPORTED COMPONENTS

PR Puncture Resistant
Resistente a las Perforaciones

MT Metatarsal Guard
Protector del Metatarso

SR Slip Resistant
Antidérapante

EH Electrical Hazard
Peligro Eléctrico

SD Static-Dissipative
Disipador de Estática

**RED WING BRNR XP Men's 6-inch Boot****2403** NT   **UPPER:** Full Grain, Waterproof Leather**FOOTBED:** Quadrex V2 Multi-Layer System**SHANK:** Fiberglass**LAST:** 687**CONSTRUCTION:** Direct Attach to Welt**RATING:** ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR**SIZES:** D 7-12,13,14,15 EE 7-12,13,14,15 H 8-12,13

TECHNOLOGIES



SOLE RESISTANCE CHART

Dual Density GripTek

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

ASSEMBLED
IN THE **USA** W/IMPORTED
COMPONENTS**RED WING KING TOE Men's 6-inch Boot****2240** NT  **UPPER:** Nubuck, Waterproof and Waxed Leather**FOOTBED:** Nylon Covered Polyurethane**SHANK:** Non-metallic**LAST:** 800**CONSTRUCTION:** Direct Attach**RATING:** ASTM F2413-18, M/I/C, EH**SIZES:** B 10-12,13,14 D 7-12,13,14,15 EE 7-12,13,14 H 8-12,13

TECHNOLOGIES



SOLE RESISTANCE CHART

TPU-PU Galaxy

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Good
Non-Marking	Yes



GLOBALLY SOURCED

**RED WING KING TOE Men's 6-inch Boot****2243** NT  **UPPER:** Nubuck, Waterproof and Waxed Leather**FOOTBED:** Nylon Covered Polyurethane**SHANK:** Non-metallic**LAST:** 800**CONSTRUCTION:** Direct Attach**RATING:** ASTM F2413-18, M/I/C, EH**SIZES:** B 10-12,13,14 D 7-12,13,14,15 EE 7-12,13,14 H 8-12,13

TECHNOLOGIES



SOLE RESISTANCE CHART

TPU-PU Galaxy

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Good
Non-Marking	Yes



GLOBALLY SOURCED

**RED WING TRACTION TRED Men's 6-inch Boot****2415** NT   **UPPER:** Full Grain, Waterproof and Oiled Leather**FOOTBED:** Removable Polyurethane**LAST:** 325**CONSTRUCTION:** Goodyear Leather Welt**RATING:** ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR**SIZES:** D 7-12,13,14,15 EE 8-12,13,14

TECHNOLOGIES



SOLE RESISTANCE CHART

Rubber-Blown Rubber Traction Tred

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED

 **Steel Toe**
Puntera de Acero **Aluminum Toe**
Puntera de Aluminio **Non-Metallic Toe**
Puntera No Metálica **Waterproof**
Impermeable **Insulated**
Con Aislamiento


RED WING TRACTION TRED LITE Men's 6-inch Boot
2440 NT SR EH

UPPER: Nubuck, Waterproof, Oiled and Waxed Leather

FOOTBED: Removable Polyurethane

LAST: 325

CONSTRUCTION: Welt

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR

SIZES: D 7-12,13,14,15 EE 8-12,13,14 H 8-12

TECHNOLOGIES

SOLE RESISTANCE CHART
LiteTred

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes


GLOBALLY SOURCED

RED WING TRACTION TRED LITE Men's 6-inch Boot
2447 NT SR EH

UPPER: Full Grain, Waterproof and Waxed Leather

FOOTBED: Polyurethane

SHANK: None

LAST: 325

CONSTRUCTION: Welt

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR

SIZES: D 7-12,13,14,15 EE 8-12,13,14 H 8-12

TECHNOLOGIES

SOLE RESISTANCE CHART
LiteTred

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes


GLOBALLY SOURCED

RED WING TRACTION TRED LITE Men's 6-inch Boot
2449 NT SR EH

UPPER: Nubuck, Waterproof and Oiled Leather

FOOTBED: Removable Polyurethane

SHANK: Steel

LAST: 325

CONSTRUCTION: Welt

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR

SIZES: D 7-12,13,14,15 EE 8-12,13,14 H 8-12

TECHNOLOGIES

SOLE RESISTANCE CHART
LiteTred DH

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes


GLOBALLY SOURCED

RED WING TRACTION TRED LITE Men's 6-inch Boot
2462 NT SR EH

UPPER: Full Grain, Waterproof & Waxed Leather

FOOTBED: Polyurethane

SHANK: None

LAST: 325

CONSTRUCTION: Welt

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR

SIZES: D 7-12,13,14,15 EE 8-12,13,14 H 8-12

TECHNOLOGIES

SOLE RESISTANCE CHART
LiteTred

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes


GLOBALLY SOURCED
PR Puncture Resistant
Resistente a las Perforaciones

MT Metatarsal Guard
Protector del Metatarso

SR Slip Resistant
Antidérapante

EH Electrical Hazard
Peligro Eléctrico

SD Static-Dissipative
Disipador de Estática


RED WING TRUGUARD LITE Men's 6-inch Boot
2551 NT    
UPPER: Full Grain, Oiled and Waxed Leather and Recycled Mesh

FOOTBED: Polyurethane

SHANK: Nylon

LAST: 601

CONSTRUCTION: Welt

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR

SIZES: D 6-12,13,14,15 EE 6-12,13,14,15 H 8-12,13,14

TECHNOLOGIES

SOLE RESISTANCE CHART
HDL Pivotal

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED


RED WING TRUGUARD LITE Men's 6-inch Boot
2552 NT    
UPPER: Full Grain, Oiled and Waxed Leather and Recycled Mesh

FOOTBED: Polyurethane

SHANK: Nylon

LAST: 601

CONSTRUCTION: Welt

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR

SIZES: D 6-12,13,14,15 EE 6-12,13,14,15 H 8-12,13,14

TECHNOLOGIES

SOLE RESISTANCE CHART
HDL Pivotal

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED


RED WING FLEXBOND Men's 6-inch Boot
4216 NT    
UPPER: Nubuck, Waterproof, Oiled and Waxed Leather

FOOTBED: Cambrelle[®] Covered Polyurethane

SHANK: Non-metallic

LAST: CH-691

CONSTRUCTION: Direct Attach

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR

SIZES: D 7-12,13,14,15 EE 6-12,13,14

TECHNOLOGIES

SOLE RESISTANCE CHART
Rubber-PU Auger

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED


RED WING SUPERSOLE[®] X Men's 6-inch Boot
2545 ST    
UPPER: Full Grain, Oiled Leather

SHANK: Steel

LAST: 522

CONSTRUCTION: Direct Attach to Welt

RATING: ASTM F2413-18, M/I/C, EH PR, ASTM F3445-21, SR

SIZES: D 7-12,13,14,15,16 EE 7-12,13 EEE 7-12,13

TECHNOLOGIES

SOLE RESISTANCE CHART
SuperSole[®] X

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes



MADE IN THE USA


Steel Toe
Puntera de Acero

Aluminum Toe
Puntera de Aluminio

Non-Metallic Toe
Puntera No Metálica

Waterproof
Impermeable

Insulated
Con Aislamiento


RED WING SUPERSOLE® 2.0 Men's 6-inch Boot
3507 **ST** **PR** **SR** **EH**
UPPER: Full Grain, Waterproof Leather

FOOTBED: ComfortForce

SHANK: Fiberglass

LAST: 694

CONSTRUCTION: Dual Density SuperSole® Welt

RATING: ASTM F2413-18, M/I/C, EH PR, ASTM F3445-21, SR

CSA Grade 1, ESR Rated, PR
SIZES: B 9-12,13,14 D 7-12,13,14,15 EE 7-12,13,14 H 8-12,13

RATINGS
TECHNOLOGIES

SOLE RESISTANCE CHART
Aztec SuperSole® 2.0

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Good
Non-Marking	Yes


MADE IN THE USA

RED WING VERSAPRO Men's 6-inch Boot
3028 **NT** **PR** **SR** **EH**
UPPER: Nubuck, Waterproof Leather and Abrasion Resistant Nylon

FOOTBED: Polyurethane

SHANK: Nylon

LAST: 692

CONSTRUCTION: Direct Attach

RATING: ASTM F2413-18, M/I/C, EH PR, ASTM F3445-21, SR

CSA Grade 1, ESR Rated, PR
SIZES: D 6-12,13,14 EE 6-12,13,14

RATINGS
TECHNOLOGIES

SOLE RESISTANCE CHART
Galvanext EH

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes


GLOBALLY SOURCED

RED WING KING TOE Men's 6-inch Boot
2298 **NT** **EH**
UPPER: Nubuck, Waterproof and Waxed Leather

FOOTBED: Nylon Covered Polyurethane

SHANK: Non-metallic

LAST: 800

CONSTRUCTION: Direct Attach

RATING: ASTM F2413-18, M/I/C, EH

SIZES: B 10-12,13,14 D 7-12,13,14,15 EE 7-12,13,14 H 8-12,13,14

TECHNOLOGIES

SOLE RESISTANCE CHART
TPU-PU Galaxy

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Good
Non-Marking	Yes


GLOBALLY SOURCED

RED WING SUPERSOLE® Men's 6-inch Boot
2245 **ST** **EH**
UPPER: Full Grain, Oiled Leather

SHANK: Steel

LAST: 522

CONSTRUCTION: SuperSole® Welt

RATING: ASTM F2413-18, M/I/C, EH

SIZES: B 9-12,13,14 D 7-12,13,14,15,16 E 8-12,13 EE 6-12,13 EEE

6-12,13,14,15,16
TECHNOLOGIES

MADE IN THE USA

Puncture Resistant
Resistente a las Perforaciones

Metatarsal Guard
Protector del Metatarso

Slip Resistant
Antidérapante

Electrical Hazard
Peligro Eléctrico

Static-Dissipative
Disipador de Estática


RED WING SUPERSOLE® 2.0 Men's 6-inch Boot
2406 **ST** **SR** **EH**
UPPER: Full Grain, Waterproof Leather

FOOTBED: ComfortForce

SHANK: Fiberglass

LAST: 694

CONSTRUCTION: Dual Density SuperSole® Welt

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR

SIZES: A 10-12,13,14 B 8-12,13,14,15 C 8-12,13 D 6-12,13,14,15,16 E 7-12,13 EE 6-12,13,14,15 H 7-12,13,14,15

TECHNOLOGIES


SOLE RESISTANCE CHART
Aztec SuperSole® 2.0

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Good
Non-Marking	Yes


 MADE IN THE **USA**

RED WING DRAFTSMITH Men's 6-inch Chelsea
2181 **AT** **SR** **EH**
UPPER: Full Grain, Oiled and Waxed Leather

FOOTBED: Polyurethane

LAST: 722

CONSTRUCTION: Cement

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR

SIZES: D 6-12,13,14,15 EE 6-12,13,14,15 H 6-12,13,14,15

TECHNOLOGIES


SOLE RESISTANCE CHART
TredLucent

Oil/Gas	Better
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED


NEW
TRACTION TRED LITE Men's 6-inch Boot
2476 **NT** **SR** **EH**
UPPER: Nubuck, Oiled and Waxed Leather

FOOTBED: Removable Polyurethane

LAST: 325

CONSTRUCTION: Welt

CARE: Kit 2 - Foam Cleaner, All Natural Leather Conditioner, Leather Protector

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR

SIZES: D 7-12,13,14,15 EE 8-12,13,14 H 8-12

TECHNOLOGIES


SOLE RESISTANCE CHART
LiteTred

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED


RED WING KING TOE Men's 6-inch Boot
2241 **NT** **SD**
UPPER: Nubuck, Waterproof and Waxed Leather

FOOTBED: Nylon Covered Polyurethane SD

SHANK: Non-metallic

LAST: 800

CONSTRUCTION: Direct Attach

RATING: ASTM F2413-18, M/I/C, SD 35

SIZES: D 6-12,13,14 EE 8-12,13,14


TECHNOLOGIES


SOLE RESISTANCE CHART
TPU-PU Galaxy

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Good
Non-Marking	Yes



GLOBALLY SOURCED


Steel Toe
Puntera de Acero

Aluminum Toe
Puntera de Aluminio

Non-Metallic Toe
Puntera No Metálica

Waterproof
Impermeable

Insulated
Con Aislamiento


IRISH SETTER WORK HOPKINS Men's 6-inch Boot
83616 **AT** **SR** **EH** 400 Gram

UPPER: Nubuck, Waterproof Leather

FOOTBED: Removable Polyurethane

SHANK: Steel

LAST: 694

CONSTRUCTION: Direct Attach

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR

SIZES: D 7-12,13,14 EE 8-12,13

TECHNOLOGIES

SOLE RESISTANCE CHART
Stars and Stripes

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED


IRISH SETTER WORK CROSBY Men's 6-inch Boot
83602 **NT** **PR** **SR** **EH**
UPPER: Nubuck, Waterproof, Oiled and Waxed Leather

FOOTBED: Removable Memory Foam-EVA

SHANK: Nylon

LAST: 157

CONSTRUCTION: Cement to Welt

RATING: ASTM F2413-18, M/I/C, EH PR, ASTM F3445-21, SR

CSA Grade 1, ESR Rated, PR

SIZES: D 8-12,13,14 EE 8-12,13,14

RATINGS
TECHNOLOGIES

SOLE RESISTANCE CHART
Rubber Diamond Tred

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED


IRISH SETTER WORK WINGSHOOTER ST Men's 6-inch Boot
83674 **NT** **PR** **SR** **EH**
UPPER: Full Grain, Waterproof Leather

FOOTBED: Removable Polyurethane

SHANK: Steel

LAST: 157

CONSTRUCTION: Welt

RATING: ASTM F2413-18, M/I/C, EH PR, ASTM F3445-21, SR

CSA Grade 1, ESR Rated, PR

SIZES: D 6-12,13,14,15 EE 7-12,13,14

RATINGS
TECHNOLOGIES

SOLE RESISTANCE CHART
Rubber-EVA Traction Tred

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED


IRISH SETTER WORK CLEARWATER Men's 6-inch Boot
83692 **ST** **PR** **SR** **EH**
UPPER: Full Grain, Waterproof Leather and Mesh Nylon

FOOTBED: EVA

SHANK: None

LAST: 223

CONSTRUCTION: Cement

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR

SIZES: D 6-12,13,14,15 EE 7-12,13,14

TECHNOLOGIES

SOLE RESISTANCE CHART
Vibram® Beehive

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED


Puncture Resistant
Resistente a las Perforaciones

Metatarsal Guard
Protector del Metatarso

Slip Resistant
Antidérapante

Electrical Hazard
Peligro Eléctrico

Static-Dissipative
Disipador de Estática


IRISH SETTER WORK CLEARWATER Men's 6-inch Boot
83696    
UPPER: Full Grain, Waterproof Leather

FOOTBED: EVA

LAST: 223

CONSTRUCTION: Cement

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR

SIZES: D 6-12,13,14,15 EE 7-12,13,14

TECHNOLOGIES
ULTRA DRY

HR

SOLE RESISTANCE CHART
Vibram® Beehive

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes


GLOBALLY SOURCED

IRISH SETTER WORK HOPKINS Men's 6-inch Boot
83614    
UPPER: Nubuck, Waterproof, Oiled and Waxed Leather

FOOTBED: Removable Polyurethane

SHANK: Steel

LAST: 694

CONSTRUCTION: Direct Attach

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR

SIZES: D 7-12,13,14 EE 8-12,13

TECHNOLOGIES
ULTRA DRY
HR
SOLE RESISTANCE CHART
Stars and Stripes

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes


GLOBALLY SOURCED

IRISH SETTER WORK HOPKINS Men's 6-inch Boot
83670    
UPPER: Full Grain, Waterproof and Oiled Leather

FOOTBED: Removable Polyurethane

SHANK: Steel

LAST: 694

CONSTRUCTION: Direct Attach

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR

SIZES: D 7-12,13,14 EE 8-12,13

TECHNOLOGIES
ULTRA DRY
HR
SOLE RESISTANCE CHART
Stars and Stripes

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes


GLOBALLY SOURCED

IRISH SETTER WORK HOPKINS Men's 6-inch Boot
83672    
UPPER: Full Grain, Waterproof and Waxed Leather

FOOTBED: Removable Polyurethane

SHANK: Steel

LAST: 694

CONSTRUCTION: Direct Attach

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR

SIZES: D 7-12,13,14 EE 8-12,13

TECHNOLOGIES
ULTRA DRY
HR
SOLE RESISTANCE CHART
Stars and Stripes

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes


GLOBALLY SOURCED
 **Steel Toe**
Puntera de Acero

 **Aluminum Toe**
Puntera de Aluminio

 **Non-Metallic Toe**
Puntera No Metálica

 **Waterproof**
Impermeable

 **Insulated**
Con Aislamiento


IRISH SETTER WORK WINGSHOOTER ST Men's 6-inch Boot
83620    
UPPER: Full Grain, Waterproof Leather

FOOTBED: Removable Polyurethane

SHANK: Steel

LAST: 157

CONSTRUCTION: Welt

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR

SIZES: D 6-12,13,14,15 EE 7-12,13,14

TECHNOLOGIES

SOLE RESISTANCE CHART
**Rubber-EVA
Traction Tred DH**

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED


IRISH SETTER WORK WINGSHOOTER ST Men's 6-inch Boot
83622    
UPPER: Full Grain, Waterproof Leather

FOOTBED: Removable Polyurethane

SHANK: Steel

LAST: 157

CONSTRUCTION: Welt

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR

SIZES: D 6-12,13,14,15 EE 7-12,13,14

TECHNOLOGIES

SOLE RESISTANCE CHART
**Rubber-EVA
Traction Tred DH**

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED


IRISH SETTER WORK CROSBY Men's 6-inch Boot
83628    
UPPER: Nubuck, Waterproof, Oiled and Waxed Leather

FOOTBED: Removable Memory Foam-EVA

SHANK: Nylon

LAST: 157

CONSTRUCTION: Cement to Welt

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR

SIZES: D 8-12,13,14 EE 8-12,13,14

TECHNOLOGIES

SOLE RESISTANCE CHART
Rubber Diamond Tred

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED


IRISH SETTER WORK WINGSHOOTER ST Men's 6-inch Boot
83630    
UPPER: Full Grain, Waterproof Leather

FOOTBED: Removable Polyurethane

LAST: 157

CONSTRUCTION: Welt

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR

SIZES: D 6-12,13,14,15 EE 7-12,13,14

TECHNOLOGIES

SOLE RESISTANCE CHART
**Rubber-EVA
Traction Tred**

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED


IRISH SETTER WORK WINGSHOOTER ST Men's 6-inch Boot
83632
UPPER: Full Grain, Waterproof Leather

FOOTBED: Removable Polyurethane

LAST: 157

CONSTRUCTION: Goodyear Leather Welt

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR

SIZES: D 6-12,13,14,15 EE 7-12,13,14

TECHNOLOGIES

SOLE RESISTANCE CHART
**Rubber-EVA
Traction Tred**

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED


IRISH SETTER WORK KASOTA Men's 6-inch Boot
83636
UPPER: Nubuck, Waterproof and Waxed Leather and Abrasion Resistant Synthetic

FOOTBED: Removable Memory Foam-EVA

SHANK: Non-metallic

LAST: 882

CONSTRUCTION: Direct Attach

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR

SIZES: D 8-12,13,14 EE 8-12,13,14

TECHNOLOGIES

SOLE RESISTANCE CHART
TriTek

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED


IRISH SETTER WORK KASOTA Men's 6-inch Boot
83642
UPPER: Nubuck, Waterproof and Waxed Leather and Abrasion Resistant Synthetic

FOOTBED: Removable Memory Foam-EVA

SHANK: Non-metallic

LAST: 882

CONSTRUCTION: Direct Attach

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR

SIZES: D 8-12,13,14 EE 8-12,13,14

TECHNOLOGIES

SOLE RESISTANCE CHART
TriTek Stripe

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED


IRISH SETTER WORK KASOTA Men's 6-inch Boot
83658
UPPER: Full Grain, Waterproof Leather and Abrasion Resistant Synthetic

FOOTBED: Removable Memory Foam-EVA

SHANK: Nylon

LAST: 882-CH

CONSTRUCTION: Direct Attach

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR

SIZES: D 8-12,13,14 EE 8-12,13,14

TECHNOLOGIES

SOLE RESISTANCE CHART
TriTek

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED



NEW

IRISH SETTER WORK WINGSHOOTER XD Men's 6-inch Boot

83668

UPPER: Full Grain, Waterproof Leather

FOOTBED: Removable Polyurethane

LAST: 157

CONSTRUCTION: Welt

RATING: ASTM F2413-18, M/I/C, EH, pr, csa grade 1, esr rated, pr

ASTM F3445-21, SR

SIZES: D 6-12,13,14,15 EE 7-12,13,14

TECHNOLOGIES



SOLE RESISTANCE CHART

Rubber-EVA
Traction Tred

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED



NEW

IRISH SETTER WORK WINGSHOOTER XD Men's 6-inch Boot

83676

UPPER: Full Grain, Waterproof Leather

FOOTBED: Removable Polyurethane

LAST: 157

CONSTRUCTION: Welt

RATING: ASTM F2413-18, M/I/C, EH, pr, csa grade 1, esr rated, pr

ASTM F3445-21, SR

SIZES: D 6-12,13,14,15 EE 7-12,13,14

TECHNOLOGIES



SOLE RESISTANCE CHART

Rubber-EVA
Traction Tred

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED



IRISH SETTER WORK EDGERTON Men's 6-inch Boot

83686

UPPER: Full Grain, Waterproof Leather

FOOTBED: Removable Polyurethane

SHANK: TPU

LAST: 702-4

CONSTRUCTION: Direct Attach to Welt

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR

SIZES: D 6-12,13,14,15 EE 7-12,13,14

TECHNOLOGIES



SOLE RESISTANCE CHART

Vibram® Edge

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED



IRISH SETTER WORK EDGERTON XD Men's 6-inch Boot

83688

UPPER: Full Grain Leather

FOOTBED: Polyurethane

SHANK: TPU

LAST: 702-4

CONSTRUCTION: Direct Attach to Welt

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR

SIZES: D 6-12,13,14,15 EE 7-12,13,14

TECHNOLOGIES



SOLE RESISTANCE CHART

Vibram® Edge
Fire and Ice

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED

PR Puncture Resistant
Resistente a las Perforaciones

MT Metatarsal Guard
Protector del Metatarso

SR Slip Resistant
Antidérapante

EH Electrical Hazard
Peligro Eléctrico

SD Static-Dissipative
Disipador de Estática


IRISH SETTER WORK EDGERTON XD Men's 6-inch Boot
83690
UPPER: Full Grain Leather

FOOTBED: Polyurethane

SHANK: TPU

LAST: 702-4

CONSTRUCTION: Direct Attach to Welt

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR

SIZES: D 6-12,13,14,15 EE 7-12,13,14

TECHNOLOGIES

ULTRA DRY
HRO

SOLE RESISTANCE CHART
**Vibram® Edge
Fire and Ice**

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED


IRISH SETTER WORK ELY Men's 6-inch Boot
83618
UPPER: Full Grain, Waterproof, Oiled and Waxed Leather

FOOTBED: Removable Polyurethane

SHANK: Non-metallic

LAST: 691

CONSTRUCTION: Direct Attach

RATING: ASTM F2413-18, M/I/C, EH

SIZES: D 7-12,13,14 EE 7-12,13,14

TECHNOLOGIES
ULTRA DRY
SOLE RESISTANCE CHART
PU V-Grip

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Good
Non-Marking	Yes



GLOBALLY SOURCED


IRISH SETTER WORK ASHBY Men's 6-inch Boot
83606
UPPER: Full Grain, Oiled Leather

FOOTBED: Removable Polyurethane

LAST: IS-108H

CONSTRUCTION: Goodyear Welt

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR

SIZES: D 7-12,13,14 EE 7-12,13

TECHNOLOGIES
**TROUT BROOK
LEATHER**
HRO
SOLE RESISTANCE CHART
**Rubber-EVA
Traction Tred**

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED


IRISH SETTER WORK ASHBY Men's 6-inch Boot
83652
UPPER: Full Grain, Oiled Leather

FOOTBED: Removable Polyurethane

LAST: 325

CONSTRUCTION: Goodyear Welt

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR

SIZES: D 7-12,13,14 EE 7-12,13

TECHNOLOGIES
HRO
SOLE RESISTANCE CHART
**Rubber-EVA
Traction Tred**

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED

Steel Toe
Puntera de Acero

 Aluminum Toe
Puntera de Aluminio

 Non-Metallic Toe
Puntera No Metálica

 Waterproof
Impermeable

 Insulated
Con Aislamiento


IRISH SETTER WORK ELY Men's 6-inch Boot
83608
UPPER: Full Grain, Oiled and Waxed Leather

FOOTBED: Removable Polyurethane

SHANK: Non-metallic

LAST: 691

CONSTRUCTION: Direct Attach

RATING: ASTM F2413-18, M/I/C, EH

SIZES: D 7-12,13,14 EE 7-12,13,14

SOLE RESISTANCE CHART
PU V-Grip

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Good
Non-Marking	Yes



GLOBALLY SOURCED


IRISH SETTER WORK ELY Men's 6-inch Boot
83612
UPPER: Full Grain Leather

FOOTBED: Removable Polyurethane

SHANK: Non-metallic

LAST: 691

CONSTRUCTION: Direct Attach

RATING: ASTM F2413-18, M/I/C, EH

SIZES: D 7-12,13,14 EE 7-12,13,14

SOLE RESISTANCE CHART
PU V-Grip

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Good
Non-Marking	Yes



GLOBALLY SOURCED


WORX AXIL Men's 6-inch Boot
5909
UPPER: Nubuck, Waterproof, Oiled and Waxed Leather

FOOTBED: Removable EVA

SHANK: Fiberglass

LAST: 694

CONSTRUCTION: Welt

RATING: ASTM F2413-18, M/I/C, EH PR, ASTM F3445-21, SR

CSA Grade 1, ESR Rated, PR
SIZES: M 7-12,13,14 WW 8-12,13,14

RATINGS

TECHNOLOGIES



SWEN-FLEX®


SOLE RESISTANCE CHART
Arrowhead XT

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED


WORX AXIL Men's 6-inch Boot
5634
UPPER: Nubuck, Waterproof, Oiled and Waxed Leather

FOOTBED: Removable EVA

SHANK: Non-metallic

LAST: 694

CONSTRUCTION: Welt

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR

SIZES: M 7-12,13,14 WW 8-12,13,14

TECHNOLOGIES


SOLE RESISTANCE CHART
Arrowhead XT

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED


Puncture Resistant
Resistente a las Perforaciones

Metatarsal Guard
Protector del Metatarso

Slip Resistant
Antidérapante

Electrical Hazard
Peligro Eléctrico

Static-Dissipative
Disipador de Estática

**WORX E-FORCE Men's 6-inch Boot****5540**    

UPPER: PU Coated Leather

FOOTBED: EVA

SHANK: None

LAST: 691EN

CONSTRUCTION: Direct Attach

RATING: ASTM F2413-18, M/I/C, SD 35 PR, ASTM F3445-21, SR

SIZES: 35,36,37,38,39,40,41,42,43,44,45,46,47,48

SOLE RESISTANCE CHART

**Rubber-PU
Comfort Trek**

Oil/Gas	Best
Chemicals	Better
Abrasions	Better
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED

**WORX ELECTRUM Men's 6-inch Boot****5611**   

UPPER: Full Grain, Waterproof, Oiled and Waxed Leather and Abrasion Resistant Nylon

FOOTBED: Removable Polyurethane

SHANK: Non-metallic

LAST: 691

CONSTRUCTION: Direct Attach

RATING: ASTM F2413-18, M/I/C, EH

SIZES: M 7-12,13,14 WW 8-12,13

TECHNOLOGIES



SOLE RESISTANCE CHART

PU Cascade I

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Good
Non-Marking	Yes



GLOBALLY SOURCED

**NEW****WORX CINDER Men's 6-inch Boot****5670**   

UPPER: Full Grain, Waterproof and Waxed Leather

FOOTBED: TPE

LAST: 691

CONSTRUCTION: Stitchdown-Cement

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR

SIZES: M 7-12,13,14 WW 8-12,13,14

TECHNOLOGIES



SOLE RESISTANCE CHART

CinderGrip

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED

**NEW****WORX CINDER Men's 6-inch Boot****5671**   

UPPER: Full Grain, Waterproof and Waxed Leather

FOOTBED: TPE

LAST: 691

CONSTRUCTION: Stitchdown-Cement

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR

SIZES: M 7-12,13,14 WW 8-12,13,14

TECHNOLOGIES



SOLE RESISTANCE CHART

CinderGrip

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED

 **Steel Toe**
Puntera de Acero **Aluminum Toe**
Puntera de Aluminio **Non-Metallic Toe**
Puntera No Metálica **Waterproof**
Impermeable **Insulated**
Con Aislamiento

**NEW****WORX ESSENTIALS Men's Chelsea****5647** **ST** **SR** **EH****UPPER:** Full Grain Waterproof and Waxed Leather**FOOTBED:** TPE**SHANK:** Fiberglass**LAST:** 882-CH**CONSTRUCTION:** Cement**RATING:** ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR**SIZES:** M 7-12,13,14 WW 8-12,13,14

TECHNOLOGIES

**SOLE RESISTANCE CHART****EssentialsLite EH**

Oil/Gas	Best
Chemicals	Best
Abrasions	Better
Heat	Better
Non-Marking	Yes



GLOBALLY SOURCED

**WORX JOIST Men's 6-inch Romeo****5424** **ST** **EH****UPPER:** Full Grain, Oiled Leather**FOOTBED:** Removable Polyurethane**SHANK:** Steel**LAST:** 702**CONSTRUCTION:** Direct Attach to Welt**RATING:** ASTM F2413-18, M/I/C, EH**SIZES:** M 7-12,13,14 WW 8-12,13**SOLE RESISTANCE CHART****ENDURANCE Arrowhead**

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Good
Non-Marking	Yes



GLOBALLY SOURCED

**WORX ELECTRUM Men's 6-inch Boot****5266** **NT** **EH****UPPER:** Full Grain, Oiled Leather and Abrasion Resistant Nylon**FOOTBED:** Removable Polyurethane**SHANK:** Non-metallic**LAST:** 691**CONSTRUCTION:** Direct Attach**RATING:** ASTM F2413-18, M/I/C, EH**SIZES:** M 4-12,13,14 WW 8-12,13**SOLE RESISTANCE CHART****PU Cascade I**

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Good
Non-Marking	Yes



GLOBALLY SOURCED

**WORX ELECTRUM Men's 6-inch Boot****5650** **NT** **EH****UPPER:** Full Grain, Oiled Leather and Abrasion Resistant Nylon**FOOTBED:** Removable Polyurethane**SHANK:** Non-metallic**LAST:** 691**CONSTRUCTION:** Direct Attach**RATING:** ASTM F2413-18, M/I/C, EH**SIZES:** M 7-12,13,14 WW 8-12,13

TECHNOLOGIES

**SOLE RESISTANCE CHART****PU Cascade I**

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Good
Non-Marking	Yes



GLOBALLY SOURCED

PR Puncture Resistant
Resistente a las Perforaciones**MT** Metatarsal Guard
Protector del Metatarso**SR** Slip Resistant
Antidérapante**EH** Electrical Hazard
Peligro Eléctrico**SD** Static-Dissipative
Disipador de Estática

8-9-INCH BOOTS

Engineered and field-tested for the longest, toughest workdays.



RED WING KING TOE Men's 8-inch Boot

3548 **NT**   800 Gram **PR** **SR** **EH**

UPPER: Full Grain, Waterproof Leather

FOOTBED: Nylon Covered Polyurethane

SHANK: Non-metallic

LAST: 800

CONSTRUCTION: Direct Attach

RATING: ASTM F2413-18, M/I/C, EH PR, ASTM F3445-21, SR
CSA Grade 1, ESR Rated, PR

SIZES: D 7-12,13,14,15 EE 8-12,13,14 H 8-12,13

RATINGS



TECHNOLOGIES



SOLE RESISTANCE CHART

Vibram® Galactic Fire and Ice

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED



Steel Toe
Puntera de Acero



Aluminum Toe
Puntera de Aluminio



Non-Metallic Toe
Puntera No Metálica



Waterproof
Impermeable



Insulated
Con Aislamiento


RED WING SUPERSOLE® 2.0 Men's 8-inch Boot
2412 **ST** 400 Gram **PR** **SR** **EH**
UPPER: Full Grain, Waterproof Leather

FOOTBED: ComfortForce

SHANK: Fiberglass

LAST: 694

CONSTRUCTION: Dual Density SuperSole® Welt

RATING: ASTM F2413-18, M/I/C, EH PR, ASTM F3445-21, SR, CSA Grade 1, ESR Rated, PR
SIZES: B 10-12,13,14 D 6-12,13,14,15 E 7-12,13 EEE 7-12,13,14,15

RATINGS

TECHNOLOGIES

MADE IN THE USA
SOLE RESISTANCE CHART
Aztec SuperSole® 2.0

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Good
Non-Marking	Yes


RED WING POLAR X Men's 8-inch Boot
3263 **NT** 1600g **PR** **SR** **EH**
UPPER: Full Grain, Waterproof Leather and Synthetic Mesh

FOOTBED: EVA

SHANK: Nylon

LAST: 600EN

CONSTRUCTION: Direct Attach

RATING: ASTM F2413-18, M/I/C, EH PR, ASTM F3445-21, SR, CSA Grade 1, ESR Rated, PR, EN ISO 20345:2022 SB PL WR CIFO E HRO
SIZES: D 6,7,8,9,10,11,12,13,14,15 EE 6,7,8,9,10,11,12,13,14,15

RATINGS

TECHNOLOGIES

SOLE RESISTANCE CHART
IceAxe

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes


GLOBALLY SOURCED

RED WING POLAR X Men's 8-inch Boot
3265 **NT** 1600g **PR** **SR** **EH**
UPPER: Full Grain, Waterproof Leather and Synthetic Mesh

FOOTBED: EVA

SHANK: Nylon

LAST: 600EN

CONSTRUCTION: Direct Attach

RATING: ASTM F2413-18, M/I/C, EH PR, ASTM F3445-21, SR, CSA Grade 1, ESR Rated, PR, EN ISO 20345:2022 SB PL WR CIFO E HRO
SIZES: D 6,7,8,9,10,11,12,13,14,15 EE 6,7,8,9,10,11,12,13,14,15

RATINGS

TECHNOLOGIES

SOLE RESISTANCE CHART
IceAxe

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	No


GLOBALLY SOURCED

RED WING DYNAFORCE Men's 8-inch Boot
4442 **ST** 400 Gram **EH**
UPPER: Nubuck, Waterproof, Oiled and Waxed Leather

FOOTBED: ComfortForce

SHANK: Non-metallic

LAST: 694

CONSTRUCTION: SuperSole® Welt

RATING: ASTM F2413-18, M/I/C, EH

SIZES: B 10-12,13,14 D 7-12,13,14,15 EE 7-12,13,14 H 8-12,13,14

ASSEMBLED IN THE USA WITH IMPORTED COMPONENTS
PR Puncture Resistant
Resistente a las Perforaciones

MT Metatarsal Guard
Protector del Metatarso

SR Slip Resistant
Antiderrapante

EH Electrical Hazard
Peligro Eléctrico

SD Static-Dissipative
Disipador de Estática

**RED WING MAXBOND Men's 8-inch Boot****3591**

UPPER: Brown Cordura
 FOOTBED: ComfortForce
 SHANK: Fiberglass
 LAST: 694

CONSTRUCTION: Direct Attach to Welt

RATING: ASTM F2413-18, M/I/C, EH PR, ASTM F3445-21, SR
 CSA Grade 1, ESR Rated, PR
SIZES: D 5-12,13,14,15 EE 6-12,13,14

RATINGS



TECHNOLOGIES

**SOLE RESISTANCE CHART****Dual Density Mini Lug II**

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Good
Non-Marking	Yes

ASSEMBLED IN THE **USA** W/IMPORTED COMPONENTS**RED WING SUPERSOLE® 2.0 Men's 8-inch Boot****2414**

UPPER: Full Grain, Waterproof Leather
 FOOTBED: ComfortForce
 SHANK: Fiberglass
 LAST: 694

CONSTRUCTION: Dual Density SuperSole® Welt

RATING: ASTM F2413-18, M/I/C, EH PR, ASTM F3445-21, SR
 CSA Grade 1, ESR Rated, PR
SIZES: B 10-12,13,14 D 7-12,13,14,15 E 7-12,13 EEE 7-12,13,14

RATINGS



TECHNOLOGIES

**SOLE RESISTANCE CHART****Aztec SuperSole® 2.0**

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Good
Non-Marking	Yes

MADE IN THE **USA****RED WING VERSAPRO Men's 8-inch Boot****3030**

UPPER: Nubuck, Waterproof Leather and Abrasion Resistant Nylon
 FOOTBED: Polyurethane
 SHANK: Nylon
 LAST: 692

CONSTRUCTION: Direct Attach

RATING: ASTM F2413-18, M/I/C, EH PR, ASTM F3445-21, SR
 CSA Grade 1, ESR Rated, PR
SIZES: D 6-12,13,14 EE 6-12,13,14

RATINGS



TECHNOLOGIES

**SOLE RESISTANCE CHART****Galvanext EH**

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED

**RED WING TRACTION TRED LITE Men's 8-inch Boot****3522**

UPPER: Nubuck, Waterproof, Oiled and Waxed Leather
 FOOTBED: Removable Polyurethane
 LAST: 325

CONSTRUCTION: Welt

RATING: ASTM F2413-18, M/I/C, EH PR, ASTM F3445-21, SR
 CSA Grade 1, ESR Rated, PR
SIZES: D 7-12,13,14,15 EE 8-12,13,14 H 8-12

RATINGS



TECHNOLOGIES

**SOLE RESISTANCE CHART****LiteTred**

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED

Steel Toe
Puntera de Acero **Aluminum Toe**
Puntera de Aluminio **Non-Metallic Toe**
Puntera No Metálica **Waterproof**
Impermeable **Insulated**
Con Aislamiento

**RED WING TRADESMAN Men's 8-inch Boot****3531** NT PR SR EH**UPPER:** Nubuck, Waterproof and Waxed Leather and Abrasion Resistant Mesh**FOOTBED:** Removable Polyurethane**LAST:** 601**CONSTRUCTION:** Direct Attach**RATING:** ASTM F2413-18, M/I/C, EH PR, ASTM F3445-21, SR

CSA Grade 1, ESR Rated, PR

SIZES: D 6-12,13,14,15,16 EE 6-12,13,14,15 H 8-12,13,14

RATINGS



TECHNOLOGIES

**L-protection**
LENZI**SOLE RESISTANCE CHART****VersaTrax**

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED

**NEW****KING TOE Men's 8-inch Boot****3565** NT PR SR EH**UPPER:** Nubuck, Waterproof and Waxed Leather**FOOTBED:** Nylon Covered Polyurethane**SHANK:** TPU**LAST:** 800**CONSTRUCTION:** Direct Attach**CARE:** Kit 4 - Waterproof Cleaner, Mink Oil, Leather Protector**RATING:** ASTM F2413-18, M/I/C, EH PR, ASTM F3445-21, SR, CSA Grade 1, ESR Rated, PR**SIZES:** D 7-12,13,14,15 EE 8-12,13,14 H 8-12,13

RATINGS



TECHNOLOGIES

**SOLE RESISTANCE CHART****Vibram® Galactic TC-4 Plus EH**

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED

**RED WING TRUGUARD LITE Men's 8-inch Boot****3590** NT PR SR EH**UPPER:** Full Grain, Waterproof Leather and Recycled Mesh**FOOTBED:** Polyurethane**SHANK:** Nylon**LAST:** 601**CONSTRUCTION:** Welt**RATING:** ASTM F2413-18, M/I/C, EH PR, ASTM F3445-21, SR

CSA Grade 1, ESR Rated, PR

SIZES: D 6-12,13,14,15 EE 6-12,13,14,15 H 8-12,13,14

RATINGS



TECHNOLOGIES

**L-protection**
LENZI**SOLE RESISTANCE CHART****HDL Pivotal**

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED

**NEW****VERSAPRO Men's 8-inch Boot****3035** NT PR MT SR SD**UPPER:** Nubuck, Waterproof Leather and Abrasion Resistant Nylon**FOOTBED:** Polyurethane**SHANK:** Nylon**LAST:** 692**CONSTRUCTION:** Direct Attach**RATING:** ASTM F2413-18, M/I/C, SD 35 PR, CSA Grade 1, SD+ Rated, PR, ASTM F3445-21, SR

EN ISO 20345: 2022 S7L HRO LG M SC

SIZES: D 6-12,13,14 EE 4-12,13,14,15,16

RATINGS



TECHNOLOGIES

**L-protection**
LENZI**SOLE RESISTANCE CHART****Galvanext SD**

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED

**Puncture Resistant**
Resistente a las Perforaciones**Metatarsal Guard**
Protector del Metatarso**Slip Resistant**
Antidérapante**Electrical Hazard**
Peligro Eléctrico**Static-Dissipative**
Disipador de Estática

**RED WING KING TOE Men's 8-inch Boot****2244** NT   400 Gram **EH****UPPER:** Nubuck, Waterproof and Waxed Leather**FOOTBED:** Nylon Covered Polyurethane**SHANK:** Fiberglass**LAST:** 800**CONSTRUCTION:** Direct Attach**RATING:** ASTM F2413-18, M/I/C, EH**SIZES:** D 7-12,13,14,15 EE 7-12,13,14 H 8-12,13

TECHNOLOGIES



SOLE RESISTANCE CHART

TPU-PU Galaxy

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Good
Non-Marking	Yes



GLOBALLY SOURCED

**RED WING MAXBOND Men's 8-inch Boot****2491** ST    **EH****UPPER:** Brown Cordura**FOOTBED:** ComfortForce**SHANK:** Non-metallic**LAST:** 694**CONSTRUCTION:** Direct Attach to Welt**RATING:** ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR**SIZES:** D 4-12,13,14,15 EE 6-12,13,14

TECHNOLOGIES



SOLE RESISTANCE CHART

Dual Density Mini Lug II

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Good
Non-Marking	Yes

ASSEMBLED IN THE  W/IMPORTED COMPONENTS**RED WING DYNAFORCE Men's 8-inch Boot****4200** ST  **EH****UPPER:** Nubuck, Waterproof, Oiled and Waxed Leather**FOOTBED:** ComfortForce**SHANK:** Non-metallic**LAST:** 694**CONSTRUCTION:** SuperSole® Welt**RATING:** ASTM F2413-18, M/I/C, EH**SIZES:** B 10-12,13,14 D 7-12,13,14,15 EE 7-12,13,14 H 8-12,13,14

TECHNOLOGIES



SOLE RESISTANCE CHART

Horizon™ DL SuperSole®

Oil/Gas	Best
Chemicals	Better
Abrasions	Better
Heat	Good
Non-Marking	Yes

ASSEMBLED IN THE  W/IMPORTED COMPONENTS**RED WING TRACTION TRED Men's 8-inch Boot****2418** NT    **EH****UPPER:** Full Grain, Waterproof and Oiled Leather**FOOTBED:** Nylon Covered Polyurethane**LAST:** 325**CONSTRUCTION:** Goodyear Leather Welt**RATING:** ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR**SIZES:** D 7-12,13,14,15 EE 8-12,13,14

TECHNOLOGIES



SOLE RESISTANCE CHART

Rubber-Blown Rubber
Traction Tred

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED


RED WING TRACTION TRED LITE Men's 8-inch Boot
2442
UPPER: Nubuck, Waterproof, Oiled and Waxed Leather

FOOTBED: Removable Polyurethane

LAST: 325

CONSTRUCTION: Welt

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR

SIZES: D 7-12,13,14,15 EE 8-12,13,14 H 8-12

TECHNOLOGIES

SOLE RESISTANCE CHART
LiteTred

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes


GLOBALLY SOURCED

RED WING TRUGUARD LITE Men's 8-inch Boot
2553
UPPER: Full Grain, Oiled and Waxed Leather and Recycled Mesh

FOOTBED: Polyurethane

SHANK: Nylon

LAST: 601

CONSTRUCTION: Welt

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR

SIZES: D 6-12,13,14,15 EE 6-12,13,14,15 H 8-12,13,14

TECHNOLOGIES

SOLE RESISTANCE CHART
HDL Pivotal

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes


GLOBALLY SOURCED

RED WING SUPERSOLE® X Men's 8-inch Boot
2534
UPPER: Smooth Finish, Oiled Leather

SHANK: Steel

LAST: 522

CONSTRUCTION: Direct Attach to Welt

RATING: ASTM F2413-18, M/I/C, EH PR, ASTM F3445-21, SR

SIZES: D 5-12,13,14,15,16 EE 7-12,13,14 EEE 7-12,13,14

TECHNOLOGIES

SOLE RESISTANCE CHART
SuperSole® X

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes


MADE IN THE USA

RED WING SUPERSOLE® 2.0 Men's 8-inch Boot
3508
UPPER: Full Grain, Waterproof Leather

FOOTBED: ComfortForce

SHANK: Fiberglass

LAST: 694

CONSTRUCTION: Dual Density SuperSole® Welt

RATING: ASTM F2413-18, M/I/C, EH PR, ASTM F3445-21, SR

CSA Grade 1, ESR Rated, PR
SIZES: B 10-12,13,14 D 7-12,13,14,15,16 EE 7-12,13,14 H 8-12,13

RATINGS

TECHNOLOGIES

SOLE RESISTANCE CHART
Aztec SuperSole® 2.0

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Good
Non-Marking	Yes


MADE IN THE USA

Puncture Resistant
Resistente a las Perforaciones

Metatarsal Guard
Protector del Metatarso

Slip Resistant
Antidérapante

Electrical Hazard
Peligro Eléctrico

Static-Dissipative
Disipador de Estática


RED WING KING TOE Men's 8-inch Boot
2280 NT EH

UPPER: Nubuck, Waterproof and Waxed Leather

FOOTBED: Nylon Covered Polyurethane

SHANK: Non-metallic

LAST: 800

CONSTRUCTION: Direct Attach

RATING: ASTM F2413-18, M/I/C, EH

SIZES: D 7-12,13,14,15 EE 7-12,13,14 H 8-12,13

TECHNOLOGIES

SOLE RESISTANCE CHART
TPU-PU Galaxy

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Good
Non-Marking	Yes


GLOBALLY SOURCED

RED WING SUPERSOLE® 2.0 Men's 8-inch Boot
2408 ST SR EH

UPPER: Full Grain, Waterproof Leather

FOOTBED: ComfortForce

SHANK: Fiberglass

LAST: 694

CONSTRUCTION: Dual Density SuperSole® Welt

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR

SIZES: B 8-12,13,14,15 D 6-12,13,14,15,16 E 8-12,13 EE 7-12,13,14,15 H 8-12,13,14,15

TECHNOLOGIES

SOLE RESISTANCE CHART
Aztec SuperSole® 2.0

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Good
Non-Marking	Yes


MADE IN THE USA

RED WING SUPERSOLE® X Men's 8-inch Boot
2533 ST SR EH

UPPER: Full Grain, Oiled Leather

SHANK: Steel

LAST: 522

CONSTRUCTION: Direct Attach to Welt

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR

SIZES: D 5-12,13,14,15,16 EE 7-12,13,14 EEE 7-12,13,14

TECHNOLOGIES

SOLE RESISTANCE CHART
SuperSole® X

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes


MADE IN THE USA

RED WING POLAR X Men's 14-inch Boot
3266 NT 1600g PR SR EH

UPPER: Full Grain, Waterproof Leather and Synthetic Mesh

FOOTBED: EVA

SHANK: Nylon

LAST: 600EN

CONSTRUCTION: Direct Attach


RATING: ASTM F2413-18, M/I/C, EH PR, ASTM F3445-21, SR, CSA Grade 1, ESR

Rated, PR, EN ISO 20345:2022 SB PL WR CIFO E HRO
SIZES: D 6,7,8,9,10,11,12,13,14,15 EE 6,7,8,9,10,11,12,13,14,15

RATINGS
TECHNOLOGIES

SOLE RESISTANCE CHART
IceAxe

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	No


GLOBALLY SOURCED



IRISH SETTER WORK WINGSHOOTER ST Men's 8-inch Boot
83862
UPPER: Full Grain, Waterproof Leather

FOOTBED: Removable Polyurethane

SHANK: Steel

LAST: 157

CONSTRUCTION: Welt

RATING: ASTM F2413-18, M/I/C, EH PR, ASTM F3445-21, SR

CSA Grade 1, ESR Rated, PR
SIZES: D 6-12,13,14,15 EE 7-12,13,14

RATINGS

TECHNOLOGIES

SOLE RESISTANCE CHART
**Rubber-EVA
Traction Tred**

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes


GLOBALLY SOURCED

IRISH SETTER WORK KASOTA Men's 8-inch Boot
83864
UPPER: Full Grain, Waterproof Leather and Abrasion Resistant Synthetic

FOOTBED: Removable Memory Foam-EVA

SHANK: Nylon

LAST: 882-CH

CONSTRUCTION: Direct Attach

RATING: ASTM F2413-18, M/I/C, EH PR, ASTM F3445-21, SR

CSA Grade 1, ESR Rated, PR
SIZES: D 8-12,13,14 EE 8-12,13,14

RATINGS

TECHNOLOGIES

SOLE RESISTANCE CHART
TriTek

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes


GLOBALLY SOURCED

NEW
IRISH SETTER WORK EDGERTON Men's 8-inch Boot
83886
UPPER: Full Grain Leather

FOOTBED: Removable Polyurethane

LAST: 702-4

CONSTRUCTION: Direct Attach to Welt

RATING: ASTM F2413-18, M/I/C, EH, pr, csa grade 1, esr rated, pr

ASTM F3445-21, SR
SIZES: D 6-12,13,14,15 EE 7-12,13,14

RATINGS

TECHNOLOGIES

GLOBALLY SOURCED
SOLE RESISTANCE CHART
**Vibram® Edge Fire
& Ice**

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes


NEW
IRISH SETTER WORK EDGERTON Men's 8-inch Boot
83898
UPPER: Full Grain Leather

FOOTBED: Removable Polyurethane

LAST: 702-4

CONSTRUCTION: Direct Attach to Welt

RATING: ASTM F2413-18, M/I/C, EH, pr, csa grade 1, esr rated, pr

ASTM F3445-21, SR
SIZES: D 6-12,13,14,15 EE 7-12,13,14

RATINGS

TECHNOLOGIES

GLOBALLY SOURCED
SOLE RESISTANCE CHART
**Vibram® Edge Fire
& Ice**

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes


PR Puncture Resistant
Resistente a las Perforaciones

MT Metatarsal Guard
Protector del Metatarso

SR Slip Resistant
Antidérapante

EH Electrical Hazard
Peligro Eléctrico

SD Static-Dissipative
Disipador de Estática


IRISH SETTER WORK WINGSHOOTER ST Men's 8-inch Boot
83856 NT PR SR EH

UPPER: Full Grain, Waterproof Leather

FOOTBED: Removable Polyurethane

LAST: 157

CONSTRUCTION: Welt

RATING: ASTM F2413-18, M/I/C, EH PR, ASTM F3445-21, SR

CSA Grade 1, ESR Rated, PR
SIZES: D 6-12,13,14,15 EE 7-12,13,14

RATINGS

TECHNOLOGIES

SOLE RESISTANCE CHART
**Rubber-EVA
Traction Tred**

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED


IRISH SETTER WORK WINGSHOOTER Men's 8-inch Boot
83858 NT PR SR EH

UPPER: Full Grain, Waterproof Leather

FOOTBED: Polyurethane

SHANK: Nylon

LAST: 157

CONSTRUCTION: Welt

RATING: ASTM F2413-18, M/I/C, EH PR, ASTM F3445-21, SR

CSA Grade 1, ESR Rated, PR
SIZES: D 6-12,13,14,15 EE 7-12,13,14

RATINGS

TECHNOLOGIES

SOLE RESISTANCE CHART
**Rubber-EVA
Traction Tred DH**

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED


IRISH SETTER WORK KASOTA Men's 8-inch Boot
83866 NT PR SR EH

UPPER: Full Grain, Waterproof Leather and Abrasion Resistant Synthetic

FOOTBED: Removable Memory Foam-EVA

SHANK: Nylon

LAST: 882-CH

CONSTRUCTION: Direct Attach

RATING: ASTM F2413-18, M/I/C, EH PR, ASTM F3445-21, SR

CSA Grade 1, ESR Rated, PR
SIZES: D 8-12,13,14 EE 8-12,13,14

RATINGS

TECHNOLOGIES

SOLE RESISTANCE CHART
TriTek

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED


IRISH SETTER WORK EDGERTON XD Men's Edgerton XD
83882 NT PR SR EH

UPPER: Full Grain Leather

FOOTBED: Polyurethane

SHANK: TPU

LAST: 702-4

CONSTRUCTION: Direct Attach to Welt

RATING: ASTM F2413-18, M/I/C, EH PR, ASTM F3445-21, SR

CSA Grade 1, ESR Rated, PR
SIZES: D 6-12,13,14,15 EE 7-12,13,14

RATINGS

TECHNOLOGIES

SOLE RESISTANCE CHART
**Vibram® Edge
Fire and Ice**

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED


IRISH SETTER WORK WINGSHOOTER ST Men's 8-inch Boot
83802    
UPPER: Full Grain, Waterproof Leather

FOOTBED: Removable Polyurethane

SHANK: Steel

LAST: 157

CONSTRUCTION: Welt

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR

SIZES: D 6-12,13,14,15 EE 7-12,13,14

TECHNOLOGIES

SOLE RESISTANCE CHART
**Rubber-EVA
Traction Tred DH**

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED


IRISH SETTER WORK WINGSHOOTER ST Men's 8-inch Boot
83832    
UPPER: Full Grain, Waterproof Leather

FOOTBED: Removable Polyurethane

LAST: 157

CONSTRUCTION: Goodyear Leather Welt

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR

SIZES: D 6-12,13,14,15 EE 7-12,13,14

TECHNOLOGIES

SOLE RESISTANCE CHART
**Rubber-EVA
Traction Tred**

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED


IRISH SETTER WORK EDGERTON Men's 8-inch Boot
83876    
UPPER: Full Grain, Waterproof Leather

FOOTBED: Removable Polyurethane

SHANK: TPU

LAST: 702-4

CONSTRUCTION: Direct Attach to Welt

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR

SIZES: D 6-12,13,14,15 EE 7-12,13,14

TECHNOLOGIES

SOLE RESISTANCE CHART
Vibram® Edge

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED


NEW
IRISH SETTER WORK WINGSHOOTER XD Men's 8-inch Boot
83884    
UPPER: Full Grain, Waterproof Leather

FOOTBED: Removable Polyurethane

LAST: 157

CONSTRUCTION: Welt

RATING: ASTM F2413-18, M/I/C, EH, pr, csa grade 1, esr rated, pr
ASTM F3445-21, SR

SIZES: D 6-12,13,14,15 EE 7-12,13,14

TECHNOLOGIES

SOLE RESISTANCE CHART
**Rubber-EVA
Traction Tred**

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED

PR Puncture Resistant
Resistente a las Perforaciones

MT Metatarsal Guard
Protector del Metatarso

SR Slip Resistant
Antidérapante

EH Electrical Hazard
Peligro Eléctrico

SD Static-Dissipative
Disipador de Estática



NEW

IRISH SETTER WORK SHOREWOOD Men's 9-inch Boot**83872** ST     

UPPER: Full Grain, Waterproof Leather

FOOTBED: Polyurethane

LAST: CC2

CONSTRUCTION: Stitchdown

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR

SIZES: D 6-12,13,14,15 EE 7-12,13,14

TECHNOLOGIES

ULTRA
DRYPRIMALOF
400 gram

CUSHIN



SOLE RESISTANCE CHART

VIBRAM® MONTAGNA

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED

**IRISH SETTER WORK MARSHALL Men's 9-inch Boot****83852** ST     

UPPER: Full Grain, Waterproof and Oiled Leather

FOOTBED: Removable Polyurethane

SHANK: Steel

LAST: IS-435

CONSTRUCTION: Welt

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR

SIZES: D 8-12,13,14 EE 8-12,13

TECHNOLOGIES

ULTRA
DRYRPM
TECHNOLOGY

SOLE RESISTANCE CHART

Rubber-RPM Roper

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED



NEW

IRISH SETTER WORK SHOREWOOD Men's 9-inch Boot**83870** ST     

UPPER: Full Grain, Waterproof Leather

FOOTBED: Polyurethane

LAST: CC2

CONSTRUCTION: Stitchdown

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR

SIZES: D 6-12,13,14,15 EE 7-12,13,14

TECHNOLOGIES

ULTRA
DRY

CUSHIN



SOLE RESISTANCE CHART

VIBRAM® MONTAGNA

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED

**WORX AXIL Men's 8-inch Boot****5813** ST     

UPPER: Nubuck, Waterproof, Oiled and Waxed Leather

FOOTBED: Removable EVA

SHANK: Non-metallic

LAST: 694

CONSTRUCTION: Welt

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR

SIZES: M 7-12,13,14 WW 8-12,13,14

TECHNOLOGIES

COSMOCOMFORT



SOLE RESISTANCE CHART

Arrowhead XT

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED

ST Steel Toe
Puntera de AceroAT Aluminum Toe
Puntera de AluminioNT Non-Metallic Toe
Puntera No Metálica Waterproof
Impermeable Insulated
Con Aislamiento


WORX AXIL Men's 8-inch Boot
5910 **ST** **PR** **SR** **EH**
UPPER: Nubuck, Waterproof, Oiled and Waxed Leather

FOOTBED: Removable EVA

SHANK: Fiberglass

LAST: 694

CONSTRUCTION: Welt

RATING: ASTM F2413-18, M/I/C, EH PR, ASTM F3445-21, SR

CSA Grade 1, ESR Rated, PR
SIZES: M 7-12,13,14 WW 8-12,13,14

RATINGS
TECHNOLOGIES

SWEN-FLEX®

SOLE RESISTANCE CHART
Arrowhead XT

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes


GLOBALLY SOURCED

WORX E-FORCE Men's 8-inch Boot
5840 **NT** **PR** **SR** **SD**
UPPER: PU Coated Leather

FOOTBED: EVA

SHANK: None

LAST: 691EN

CONSTRUCTION: Direct Attach

RATING: ASTM F2413-18, M/I/C, SD 35 PR, ASTM F3445-21, SR

SIZES: 35,36,37,38,39,40,41,42,43,44,45,46,47,48

SOLE RESISTANCE CHART
**Rubber-PU
Comfort Trek**

Oil/Gas	Best
Chemicals	Better
Abrasions	Better
Heat	Best
Non-Marking	Yes


GLOBALLY SOURCED

NEW
WORX CINDER Men's 8-inch Boot
5865 **ST** **SR** **SD**
UPPER: Full Grain, Waterproof and Waxed Leather

FOOTBED: TPE

LAST: 691

CONSTRUCTION: Stitchdown-Cement

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR

SIZES: M 7-12,13,14 WW 8-12,13,14

TECHNOLOGIES

SOLE RESISTANCE CHART
CinderGrip

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes


GLOBALLY SOURCED

WORX E-FORCE Men's 9-inch Pull-On Boot
5705 **NT** **PR** **SR** **SD**
UPPER: PU Coated Leather

FOOTBED: EVA

SHANK: None

LAST: 691EN

CONSTRUCTION: Direct Attach

RATING: ASTM F2413-18, M/I/C, SD 35 PR, ASTM F3445-21, SR

SIZES: 35,36,37,38,39,40,41,42,43,44,45,46,47,48

SOLE RESISTANCE CHART
**Rubber-PU
Comfort Trek**

Oil/Gas	Best
Chemicals	Better
Abrasions	Better
Heat	Best
Non-Marking	Yes


GLOBALLY SOURCED

Puncture Resistant
Resistente a las Perforaciones

Metatarsal Guard
Protector del Metatarso

Slip Resistant
Antidérapante

Electrical Hazard
Peligro Eléctrico

Static-Dissipative
Disipador de Estática



LOGGER / LINEMAN

Rugged protection and support for extra certainty on your feet.



RED WING **LOGGERMAX** Men's 9-inch Logger Boot **2219**

UPPER: Nubuck, Waterproof, Oiled and Waxed Leather

FOOTBED: Removable Polyurethane

SHANK: Lineman Steel

LAST: 690

CONSTRUCTION: Welt

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR

SIZES: D 7-12,13,14,15 EE 8-12,13,14 H 8-12,13

TECHNOLOGIES



SOLE RESISTANCE CHART

Vibram® All-Terrain Fire and Ice

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes



ASSEMBLED
IN THE **USA** W/IMPORTED
COMPONENTS



Steel Toe
Puntera de Acero



Aluminum Toe
Puntera de Aluminio



Non-Metallic Toe
Puntera No Metálica



Waterproof
Impermeable



Insulated
Con Aislamiento



RED WING **LOGGERMAX** Men's 9-inch Logger Boot

2117

UPPER: Nubuck, Waterproof and Oiled Leather

FOOTBED: Nylon Covered Polyurethane

SHANK: Lineman Steel

LAST: 634

CONSTRUCTION: Welt

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR

SIZES: D 7-12,13,14,15 EE 8-12,13,14

TECHNOLOGIES



SOLE RESISTANCE CHART

Vibram® 360 Logger TC-4 Plus

Oil/Gas	Best
Chemicals	Better
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED



RED WING **LOGGERMAX** Men's 9-inch Logger Boot

2217

UPPER: Nubuck, Waterproof, Oiled and Waxed Leather

FOOTBED: Removable Polyurethane

SHANK: Lineman Steel

LAST: 690

CONSTRUCTION: Welt

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR

SIZES: D 7-12,13,14,15 EE 8-12,13,14 H 8-12,13

TECHNOLOGIES



SOLE RESISTANCE CHART

Vibram® All-Terrain Fire and Ice

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes



ASSEMBLED IN THE IMPORTED COMPONENTS



RED WING **LOGGERMAX** Men's 9-inch Logger Boot

2120

UPPER: Nubuck, Waterproof and Oiled Leather

FOOTBED: Nylon Covered Polyurethane

SHANK: Lineman Steel

LAST: 634

CONSTRUCTION: Welt

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR

SIZES: D 7-12,13,14,15 EE 8-12,13,14

TECHNOLOGIES



SOLE RESISTANCE CHART

Vibram® 360 Logger TC-4 Plus

Oil/Gas	Best
Chemicals	Better
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED



IRISH SETTER WORK **MESABI** Men's 8-inch Logger Boot

83834

UPPER: Full Grain, Waterproof Leather

FOOTBED: Removable EVA

SHANK: Lineman Steel

LAST: 631

CONSTRUCTION: Goodyear Welt

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR

SIZES: D 8-12,13,14,15 EE 8-12,13,14

TECHNOLOGIES



SOLE RESISTANCE CHART

Stars and Stripes Logger

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED

PR Puncture Resistant
Resistente a las Perforaciones

MT Metatarsal Guard
Protector del Metatarso

SR Slip Resistant
Antidérapante

EH Electrical Hazard
Peligro Eléctrico

SD Static-Dissipative
Disipador de Estática

RATINGS

TECHNOLOGIES

TECHNOLOGIES

TECHNOLOGIES

PULL-ON BOOTS

Easy-on/easy-off boots stand up to any punishment you dish out.


RED WING BRNR XP Men's 11-inch Pull-On Boot
3555 **NT** **PR** **SR** **EH**
UPPER: Full Grain, Waterproof Leather and Abrasion Resistant Mesh

FOOTBED: Quadrex V2 Multi-Layer System

SHANK: Fiberglass

LAST: 687

CONSTRUCTION: Direct Attach to Welt

RATING: ASTM F2413-18, M/I/C, EH PR, ASTM F3445-21, SR, CSA Grade 1, ESR Rated, PR

SIZES: D 7-12,13,14,15 EE 7-12,13,14,15 H 8-12,13

RATINGS

TECHNOLOGIES

SOLE RESISTANCE CHART
Dual Density GripTek

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes


 ASSEMBLED IN THE **USA** W/IMPORTED COMPONENTS

RED WING RIO FLEX Men's 11-inch Pull-On Boot
3592 **ST** **PR** **SR** **EH**
UPPER: Nubuck, Waterproof Leather

FOOTBED: Polyurethane

SHANK: Nylon

LAST: 689

CONSTRUCTION: Welt

RATING: ASTM F2413-18, M/I/C, EH PR, ASTM F3445-21, SR, CSA Grade 1, ESR Rated, PR

SIZES: B 8-12,13,14 D 7-12,13,14,15 EE 7-12,13,14,15

RATINGS

TECHNOLOGIES

SOLE RESISTANCE CHART
Red Wing BarnStormer

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED


RED WING RIO FLEX Men's 11-inch Pull-On Boot
2204 **ST** **PR** **SR** **EH**
UPPER: Nubuck, Oiled Leather

FOOTBED: Removable Polyurethane

SHANK: Nylon

LAST: 689

CONSTRUCTION: Welt

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR

SIZES: B 8-12,13,14 D 7-12,13,14,15 EE 7-12,13,14,15

TECHNOLOGIES

SOLE RESISTANCE CHART
Red Wing BarnStormer

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED


RED WING RIO FLEX Men's 11-inch Pull-On Boot
2227 **ST** **PR** **SR** **EH**
UPPER: Full Grain, Waterproof, Oiled and Waxed Leather

FOOTBED: Removable Polyurethane

SHANK: Nylon

LAST: 689

CONSTRUCTION: Welt

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR

SIZES: B 8-12,13,14 D 7-12,13,14,15 EE 7-12,13,14,15

TECHNOLOGIES

Puncture Resistant
Resistente a las Perforaciones

Metatarsal Guard
Protector del Metatarso

Slip Resistant
Antidérapante

Electrical Hazard
Peligro Eléctrico

Static-Dissipative
Disipador de Estática


RED WING SUPERSOLE Men's 11-inch Pull-On Boot
2230
UPPER: Full Grain, Waterproof and Oiled Leather

FOOTBED: ComfortForce

SHANK: Fiberglass

LAST: 696

CONSTRUCTION: SuperSole® Welt

RATING: ASTM F2413-18, M/I/C, EH

SIZES: B 10-12,13,14 D 7-12,13,14,15 EE 7-12,13,14 H 8-12,13

TECHNOLOGIES

SOLE RESISTANCE CHART
Mini Lug SuperSole®

Oil/Gas	Best
Chemicals	Better
Abrasions	Better
Heat	Good
Non-Marking	Yes


 MADE IN THE **USA** W/IMPORTED MATERIALS

RED WING DYNAFORCE Men's 11-Inch Pull-On Boot
2272
UPPER: Nubuck, Waterproof, Oiled and Waxed Leather

FOOTBED: Removable Polyurethane

SHANK: Non-metallic

LAST: 696

CONSTRUCTION: SuperSole® Welt

RATING: ASTM F2413-18, M/I/C, EH

SIZES: B 10-12,13,14 D 7-12,13,14,15 EE 7-12,13,14 H 8-12,13,14

TECHNOLOGIES

SOLE RESISTANCE CHART
Horizon™ DL SuperSole®

Oil/Gas	Best
Chemicals	Better
Abrasions	Better
Heat	Good
Non-Marking	Yes


 ASSEMBLED IN THE **USA** W/IMPORTED COMPONENTS

NEW
RED WING RIO FLEX Men's 11-inch Pull-On Boot
2276
UPPER: Smooth Finish, Waterproof and Oiled Leather

FOOTBED: Polyurethane

SHANK: Nylon

LAST: 760

CONSTRUCTION: Welt

CARE: Kit 6 - Waterproof Cleaner, Leather Cream, Leather Protector

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR

SIZES: B 8-12,13,14 D 7-12,13,14,15 EE 7-12,13,14,15

TECHNOLOGIES

SOLE RESISTANCE CHART
Red Wing BarnStormer

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED


NEW
RED WING RIO FLEX Men's 11-inch Pull-On Boot
2277
UPPER: Smooth Finish, Waterproof and Oiled Leather

FOOTBED: Polyurethane

SHANK: Nylon

LAST: 760

CONSTRUCTION: Welt

CARE: Kit 6 - Waterproof Cleaner, Leather Cream, Leather Protector

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR

SIZES: B 8-12,13,14 D 7-12,13,14,15 EE 7-12,13,14,15

TECHNOLOGIES

SOLE RESISTANCE CHART
Red Wing BarnStormer

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED

Steel Toe
Puntera de Acero

 Aluminum Toe
Puntera de Aluminio

 Non-Metallic Toe
Puntera No Metálica

 Waterproof
Impermeable

 Insulated
Con Aislamiento



NEW

RED WING RIO FLEX Men's 11-inch Pull-On Boot**2279** ST SR EH

UPPER: Full Grain, Waterproof, Oiled and Waxed Leather

FOOTBED: Polyurethane

SHANK: Nylon

LAST: 689

CONSTRUCTION: Welt

CARE: Kit 4 - Waterproof Cleaner, Mink Oil, Leather Protector

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR

SIZES: B 8-12,13,14 D 7-12,13,14,15 EE 7-12,13,14,15

TECHNOLOGIES



SOLE RESISTANCE CHART

Red Wing BarnStormer

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED

**RED WING MAXBOND Men's 11-inch Pull-On Boot****2499** ST SR EH

UPPER: Brown Cordura

FOOTBED: ComfortForce

SHANK: Non-metallic

LAST: 696

CONSTRUCTION: Direct Attach to Welt

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR

SIZES: D 7-12,13,14,15 EE 8-12,13

TECHNOLOGIES



SOLE RESISTANCE CHART

Dual Density Mini Lug II

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Good
Non-Marking	Yes



GLOBALLY SOURCED

**RED WING FLEXFORCE Men's 11-inch Pull-On Boot****4448** AT SR EH

UPPER: Full Grain, Waterproof Leather

FOOTBED: Nylon Covered Polyurethane

SHANK: Non-metallic

LAST: 230

CONSTRUCTION: Cement to Welt

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR

SIZES: B 9-12,13,14 D 7-12,13,14,15 EE 8-12,13,14 H 8-12,13,14

TECHNOLOGIES



SOLE RESISTANCE CHART

Vibram® Rubber-PU XClaim TC-4 Plus

Oil/Gas	Best
Chemicals	Better
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED

**RED WING SUPERSOLE® Men's 11-inch Pull-On Boot****4441** ST 400 Gram EH

UPPER: Full Grain, Oiled Leather

SHANK: Steel

LAST: 522

CONSTRUCTION: SuperSole® Welt

RATING: ASTM F2413-18, M/I/C, EH

SIZES: D 6-12,13,14 EE 7-12,13,14

TECHNOLOGIES



SOLE RESISTANCE CHART

Mini Lug SuperSole®

Oil/Gas	Best
Chemicals	Better
Abrasions	Better
Heat	Good
Non-Marking	Yes



MADE IN THE USA

PR Puncture Resistant
Resistente a las Perforaciones

MT Metatarsal Guard
Protector del Metatarso

SR Slip Resistant
Antidérapante

EH Electrical Hazard
Peligro Eléctrico

SD Static-Dissipative
Disipador de Estática


RED WING SUPERSOLE® 2.0 Men's 11-inch Pull-On Boot
3505 **ST** **PR** **SR** **EH**
UPPER: Full Grain, Oiled Leather

FOOTBED: ComfortForce

SHANK: Fiberglass

LAST: 696

CONSTRUCTION: Dual Density SuperSole® Welt

RATING: ASTM F2413-18, M/I/C, EH PR, ASTM F3445-21, SR, CSA Grade 1, ESR Rated, PR

SIZES: D 7-12,13,14,15 EE 7-12,13 H 8-12,13

RATINGS
TECHNOLOGIES

SOLE RESISTANCE CHART
Aztec SuperSole® 2.0

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Good
Non-Marking	Yes


MADE IN THE USA

RED WING SUPERSOLE® Men's 11-inch Pull-On Boot
2231 **ST** **EH**
UPPER: Full Grain, Oiled Leather

SHANK: Steel

LAST: 522

CONSTRUCTION: SuperSole® Welt

RATING: ASTM F2413-18, M/I/C, EH

SIZES: AA 10-12,13,14 A 10-12,13,14 B 4-12,13,14,15,16 C 8-12,13

D 5-12,13,14,15,16 E 6-12,13,14 EE 7-12,13,14,15 EEE 6-12,13,14,15,16
TECHNOLOGIES

SOLE RESISTANCE CHART
Mini Lug SuperSole®

Oil/Gas	Best
Chemicals	Better
Abrasions	Better
Heat	Good
Non-Marking	Yes


MADE IN THE USA

NEW
RED WING RIO FLEX Men's 11-inch Pull-On Boot
2251 **ST** **SR** **EH**
UPPER: Smooth Finish, Waterproof and Oiled Leather

FOOTBED: Polyurethane

SHANK: Nylon

LAST: 760

CONSTRUCTION: Welt

CARE: Kit 6 - Waterproof Cleaner, Leather Cream, Leather Protector

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR

SIZES: B 8-12,13,14 D 7-12,13,14,15 EE 7-12,13,14,15

TECHNOLOGIES

SOLE RESISTANCE CHART
Red Wing BarnStormer

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes


GLOBALLY SOURCED

RED WING SUPERSOLE® X Men's 9-inch Pull-On Boot
2531 **ST** **SR** **EH**
UPPER: Full Grain, Oiled Leather

SHANK: Steel

LAST: 522

CONSTRUCTION: Direct Attach to Welt

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR

SIZES: D 5-12,13,14,15,16 EE 7-12,13,14 EEE 7-12,13,14

TECHNOLOGIES

SOLE RESISTANCE CHART
SuperSole® X

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes


MADE IN THE USA
ST Steel Toe
Puntera de Acero

AT Aluminum Toe
Puntera de Aluminio

NT Non-Metallic Toe
Puntera No Metálica

Waterproof
Impermeable

Insulated
Con Aislamiento


RED WING SUPERSOLE® Men's 11-inch Pull-On Boot
4470 **ST** **EH**
UPPER: Full Grain, Waxed Leather

FOOTBED: ComfortForce

SHANK: Steel

LAST: 199

CONSTRUCTION: SuperSole® Welt

RATING: ASTM F2413-18, M/I/C, EH

SIZES: B 9-12,13,14 D 7-12,13,14,15 E 8-11 EE 7-12,13,14

TECHNOLOGIES

SOLE RESISTANCE CHART
Diamond Back SuperSole®

Oil/Gas	Best
Chemicals	Better
Abrasions	Better
Heat	Good
Non-Marking	Yes


MADE IN THE USA

IRISH SETTER WORK ASHBY Men's 9-inch Pull-On Boot
83908 **AT** **SR** **EH**
UPPER: Full Grain, Oiled Leather

FOOTBED: Removable Polyurethane

LAST: 696

CONSTRUCTION: Goodyear Welt

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR

SIZES: D 7-12,13,14 EE 7-12,13

TECHNOLOGIES

SOLE RESISTANCE CHART
Rubber-EVA Traction Tred

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes


GLOBALLY SOURCED

IRISH SETTER WORK TWO HARBORS Men's 11-inch Pull-On Boot
83906 **ST** **SR** **EH**
UPPER: Nubuck, Waterproof Leather

FOOTBED: Removable Polyurethane

SHANK: Non-metallic

LAST: 229

CONSTRUCTION: Cement to Welt

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR

SIZES: D 8-12,13,14 EE 8-12,13

TECHNOLOGIES

SOLE RESISTANCE CHART
Vibram® Rubber-PU XClaim TC-4 Plus

Oil/Gas	Best
Chemicals	Better
Abrasions	Best
Heat	Best
Non-Marking	Yes


GLOBALLY SOURCED

IRISH SETTER WORK MARSHALL Men's 11-inch Pull-On Boot
83912 **ST** **SR** **EH**
UPPER: Full Grain, Oiled and Waxed Leather

FOOTBED: Removable Polyurethane

SHANK: Steel

LAST: IS-435

CONSTRUCTION: Goodyear Welt

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR

SIZES: D 8-12,13,14,15,16 EE 8-12,13,14

TECHNOLOGIES

SOLE RESISTANCE CHART
Rubber-RPM Roper

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes


GLOBALLY SOURCED

Puncture Resistant
Resistente a las Perforaciones

Metatarsal Guard
Protector del Metatarso

Slip Resistant
Antidérapante

Electrical Hazard
Peligro Eléctrico

Static-Dissipative
Disipador de Estática


IRISH SETTER WORK MARSHALL Men's 11-inch Pull-On Boot
83930
UPPER: Full Grain, Waterproof, Oiled and Waxed Leather

FOOTBED: Removable Polyurethane

SHANK: Steel

LAST: IS-435

CONSTRUCTION: Goodyear Welt

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR

SIZES: D 8-12,13,14 EE 8-12,13

TECHNOLOGIES
ULTRA DRY
RPM TECHNOLOGY
HR
SOLE RESISTANCE CHART
Rubber-RPM Roper

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes


GLOBALLY SOURCED

IRISH SETTER WORK MARSHALL Men's 11-inch Pull-On Boot
83938
UPPER: Full Grain, Waterproof, Oiled and Waxed Leather

FOOTBED: Removable Polyurethane

SHANK: Steel

LAST: IS-435

CONSTRUCTION: Goodyear Welt

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR

SIZES: D 8-12,13,14 EE 8-12,13

TECHNOLOGIES
ULTRA DRY
RPM TECHNOLOGY
HR
SOLE RESISTANCE CHART
Rubber-RPM Roper

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes


GLOBALLY SOURCED

IRISH SETTER WORK MARSHALL Men's 11-inch Pull-On Boot
83956
UPPER: Full Grain, Waterproof Leather

FOOTBED: Removable Polyurethane

SHANK: Steel

LAST: IS-435

CONSTRUCTION: Goodyear Welt

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR

SIZES: D 8-12,13,14 EE 8-12,13

TECHNOLOGIES
ULTRA DRY
RPM TECHNOLOGY
HR
SOLE RESISTANCE CHART
Rubber-RPM Roper

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes


GLOBALLY SOURCED

IRISH SETTER WORK KITTSON Men's 11-inch Pull-On Boot
83976
UPPER: Full Grain, Waterproof Leather

FOOTBED: Removable Polyurethane

SHANK: Steel

LAST: IS-436

CONSTRUCTION: Welt

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR

SIZES: D 8-12,13,14 EE 8-12,13,14

TECHNOLOGIES
ULTRA DRY
ENERGY
HR
SOLE RESISTANCE CHART
Rubber-EVA Treker ST

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes


GLOBALLY SOURCED
Steel Toe
Puntera de Acero

 Aluminum Toe
Puntera de Aluminio

 Non-Metallic Toe
Puntera No Metálica

 Waterproof
Impermeable

 Insulated
Con Aislamiento


IRISH SETTER WORK KITTSON Men's 11-inch Pull-On Boot
83978
UPPER: Full Grain, Waterproof Leather

FOOTBED: Removable Polyurethane

SHANK: Steel

LAST: IS-436

CONSTRUCTION: Welt

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR

SIZES: D 8-12,13,14 EE 8-12,13,14

TECHNOLOGIES

SOLE RESISTANCE CHART
Rubber-EVA Treker ST

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED


IRISH SETTER WORK CROSBY Men's 11-inch Pull-On Boot
83936
UPPER: Nubuck, Waterproof, Oiled and Waxed Leather and Abrasion Resistant Nylon

FOOTBED: Removable Memory Foam-EVA

SHANK: Nylon

LAST: 230

CONSTRUCTION: Cement to Welt

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR

SIZES: D 8-12,13,14 EE 8-12,13,14

TECHNOLOGIES

SOLE RESISTANCE CHART
Rubber Diamond Tred

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED


IRISH SETTER WORK TWO HARBORS Men's 11-inch Pull-On Boot
83966
UPPER: Full Grain, Waterproof Leather

FOOTBED: Removable Polyurethane

SHANK: Nylon

LAST: 229

CONSTRUCTION: Cement to Welt

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR

SIZES: D 8-12,13,14 EE 8-12,13

TECHNOLOGIES

SOLE RESISTANCE CHART
Vibram® Rubber-PU XClaim TC-4 Plus

Oil/Gas	Best
Chemicals	Better
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED


IRISH SETTER WORK MARSHALL Men's 11-inch Pull-On Boot
83972
UPPER: Full Grain, Waterproof and Oiled Leather

FOOTBED: Removable Polyurethane

SHANK: Steel

LAST: IS-440

CONSTRUCTION: Goodyear Welt

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR

SIZES: D 8-12,13,14 EE 8-12,13

TECHNOLOGIES

SOLE RESISTANCE CHART
Rubber-RPM Roper

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED


IRISH SETTER WORK TWO HARBORS Men's 11-inch Pull-On Boot
83990
UPPER: Full Grain, Waterproof Leather

FOOTBED: Polyurethane

SHANK: Nylon

LAST: 232D

CONSTRUCTION: Cement to Welt

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR

SIZES: D 8-12,13,14 EE 8-12,13

RATINGS

TECHNOLOGIES

ULTRA
DRY

HR
STABLE
FLEX
SOLE RESISTANCE CHART
**Rubber Square
Diamond Tred**

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED


IRISH SETTER WORK TWO HARBORS Men's 11-inch Pull-On Boot
83992
UPPER: Full Grain, Waterproof Leather

FOOTBED: Polyurethane

SHANK: Nylon

LAST: 232D

CONSTRUCTION: Cement to Welt

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR

SIZES: D 8-12,13,14 EE 8-12,13

TECHNOLOGIES

ULTRA
DRY

HR
STABLE
FLEX
SOLE RESISTANCE CHART
**Rubber Square
Diamond Tred**

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED


IRISH SETTER WORK TWO HARBORS Men's 11-inch Pull-On Boot
83994
UPPER: Full Grain, Waterproof Leather

FOOTBED: Polyurethane

SHANK: Nylon

LAST: 232D

CONSTRUCTION: Cement to Welt

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR

SIZES: D 8-12,13,14 EE 8-12,13

TECHNOLOGIES

ULTRA
DRY

HR
STABLE
FLEX
SOLE RESISTANCE CHART
**Rubber Square
Diamond Tred**

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED


NEW
IRISH SETTER WORK MARSHALL Men's 11-inch Pull-On Boot
83996
UPPER: Full Grain, Waterproof and Waxed Leather

FOOTBED: Removable Polyurethane

LAST: IS-440

CONSTRUCTION: Goodyear Welt

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR

SIZES: D 8-12,13,14 EE 8-12,13

TECHNOLOGIES

ULTRA
DRY
RPM
 TECHNOLOGY

HR
SOLE RESISTANCE CHART
Rubber-RPM Roper

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED

Steel Toe
 Puntera de Acero

 Aluminum Toe
 Puntera de Aluminio

 Non-Metallic Toe
 Puntera No Metálica

 Waterproof
 Impermeable

 Insulated
 Con Aislamiento



NEW

IRISH SETTER WORK MARSHALL Men's 11-inch Pull-On Boot**83998** NT SR EH**UPPER:** Full Grain, Waterproof and Waxed Leather**FOOTBED:** Removable Polyurethane**LAST:** IS-440**CONSTRUCTION:** Goodyear Welt**RATING:** ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR**SIZES:** D 8-12,13,14 EE 8-12,13

TECHNOLOGIES



SOLE RESISTANCE CHART

Rubber-RPM Roper

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED

**IRISH SETTER WORK KITTSON Men's 11-inch Pull-On Boot****83974** ST SR EH**UPPER:** Full Grain Leather**FOOTBED:** Removable Polyurethane**SHANK:** Steel**LAST:** IS-436**CONSTRUCTION:** Welt**RATING:** ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR**SIZES:** D 8-12,13,14 EE 8-12,13,14

TECHNOLOGIES



SOLE RESISTANCE CHART

Rubber-EVA Treker ST

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED

**WORX AXIL Men's 10-inch Pull-On Boot****5702** ST SR EH**UPPER:** Nubuck, Waterproof, Oiled and Waxed Leather**FOOTBED:** Removable EVA**SHANK:** Non-metallic**LAST:** 696**CONSTRUCTION:** Welt**RATING:** ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR**SIZES:** M 7-12,13,14 WW 8-12,13,14

TECHNOLOGIES



SOLE RESISTANCE CHART

Arrowhead XT

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED

**WORX TRUSS Men's 10-inch Pull-On Boot****5700** ST SR EH**UPPER:** Full Grain, Waterproof, Oiled and Waxed Leather**FOOTBED:** Removable Polyurethane**SHANK:** Steel**LAST:** 696**CONSTRUCTION:** Direct Attach to Welt**RATING:** ASTM F2413-18, M/I/C, EH**SIZES:** M 8-12,13,14 WW 8-12,13

SOLE RESISTANCE CHART

ENDURANCE Arrowhead

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Good
Non-Marking	Yes



GLOBALLY SOURCED



Puncture Resistant
Resistente a las Perforaciones



Metatarsal Guard
Protector del Metatarso



Slip Resistant
Antidérapante



Electrical Hazard
Peligro Eléctrico



Static-Dissipative
Disipador de Estática



METATARSAL GUARD

Protect the feet from dangerous drop and impact hazards.



RED WING SUPERSOLE® Men's 6-inch Boot

4433    

UPPER: Nubuck, Waterproof, Oiled and Waxed Leather
FOOTBED: Redbed™ featuring Agion® anti-microbial treatment
SHANK: Fiberglass
LAST: 694
CONSTRUCTION: SuperSole® Welt
RATING: ASTM F2413-18, M/I/C, Mt EH
SIZES: B 10-12,13,14 D 8-12,13,14,15 EE 8-12,13,14 H 8-12,13

TECHNOLOGIES



SOLE RESISTANCE CHART

Horizon™ DL SuperSole®

Oil/Gas	Best
Chemicals	Better
Abrasions	Better
Heat	Good
Non-Marking	Yes



ASSEMBLED IN THE  W/IMPORTED COMPONENTS



RED WING FLEXBOND Men's 6-inch Boot

4421    

UPPER: Full Grain, Oiled and Waxed Leather
FOOTBED: Cambrelle® Covered Polyurethane
SHANK: Non-metallic
LAST: CH-691
CONSTRUCTION: Direct Attach
RATING: ASTM F2413-18, M/I/C, Mt EH, ASTM F3445-21, SR
SIZES: D 8-12,13,14 EE 8-12,13

TECHNOLOGIES



SOLE RESISTANCE CHART

Rubber-PU Auger

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED

 **Steel Toe**
Puntera de Acero

 **Aluminum Toe**
Puntera de Aluminio

 **Non-Metallic Toe**
Puntera No Metálica

 **Waterproof**
Impermeable

 **Insulated**
Con Aislamiento

**RED WING KING TOE Men's 6-inch Boot****4456** **UPPER:** Nubuck, Oiled and Waxed Leather**FOOTBED:** Nylon Covered Polyurethane**SHANK:** Non-metallic**LAST:** 800**CONSTRUCTION:** Direct Attach**RATING:** ASTM F2413-18, M/I/C, Mt EH**SIZES:** D 7-12,13,14,15 EE 8-12,13,14

TECHNOLOGIES

KING TOE**SOLE RESISTANCE CHART****TPU-PU Galaxy**

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Good
Non-Marking	Yes



GLOBALLY SOURCED

**RED WING KING TOE ADC Men's 8-inch Boot****3516** **UPPER:** Nubuck, Waterproof, Oiled and Waxed Leather**FOOTBED:** Quadrex Four-Layer System**LAST:** 800**CONSTRUCTION:** Direct Attach**RATING:** ASTM F2413-18, M/I/C, Mt EH PR, ASTM F3445-21, SR,

CSA Grade 1, ESR Rated, PR, M

SIZES: D 7-12,13,14,15 EE 7-12,13,14 H 8-12,13,14

RATINGS

TECHNOLOGIES



GLOBALLY SOURCED

SOLE RESISTANCE CHART**Rubber VariLug**

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED

**RED WING BRNR XP Men's 8-inch Boot****3534** **UPPER:** Full Grain, Waterproof Leather and Abrasion Resistant Mesh**FOOTBED:** Quadrex V2 Multi-Layer System**SHANK:** Fiberglass**LAST:** 687**CONSTRUCTION:** Direct Attach to Welt**RATING:** ASTM F2413-18, M/I/C, Mt EH PR, ASTM F3445-21, SR, CSA Grade 1, ESR Rated, PR**SIZES:** D 7-12,13,14,15 EE 7-12,13,14,15 H 8-12,13

RATINGS

TECHNOLOGIES

ASSEMBLED
IN THE **USA** W/IMPORTED
COMPONENTS**SOLE RESISTANCE CHART****Dual Density GripTek**

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

**NEW****TRUGUARD LITE Men's 8-inch Boot****3596** **UPPER:** Full Grain, Waterproof and Waxed Leather**FOOTBED:** Polyurethane**SHANK:** Nylon**LAST:** 601**CONSTRUCTION:** Welt**CARE:** Kit 4 - Waterproof Cleaner, Mink Oil, Leather Protector**RATING:** ASTM F2413-18, M/I/C, Mt EH PR, ASTM F3445-21, SR, CSA Grade 1, ESR Rated, PR, M**SIZES:** D 6-12,13,14,15 EE 6-12,13,14,15 H 8-12,13,14

RATINGS

TECHNOLOGIES



GLOBALLY SOURCED

SOLE RESISTANCE CHART**HDL Pivotal**

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes

**PR** Puncture Resistant
Resistente a las Perforaciones**MT** Metatarsal Guard
Protector del Metatarso**SR** Slip Resistant
Antiderrapante**EH** Electrical Hazard
Peligro Eléctrico**SD** Static-Dissipative
Disipador de Estática



NEW

VERSAPRO Men's 8-inch Boot**3033** NT PR MT SR EH

UPPER: Nubuck, Waterproof Leather and Abrasion Resistant Nylon

FOOTBED: Polyurethane

SHANK: Nylon

LAST: 692

CONSTRUCTION: Direct Attach

CARE: Kit 7 - Roughout/Nubuck Cleaner Kit, Leather Protector

RATING: ASTM F2413-18, M/I/C, Mt EH PR, CSA Grade 1, ESR Rated, PR, ASTM F3445-21, SR

EN ISO 20345: 2022 SB PL WR SR HRO LG M FO SC

SIZES: D 6-12,13,14 EE 4-12,13,14,15,16

RATINGS

TECHNOLOGIES

L-protection[®]
LENZI

SOLE RESISTANCE CHART

Galvanext EH

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED



NEW

VERSAPRO Men's 8-inch Boot**3034** NT PR MT SR SD

UPPER: Nubuck, Waterproof Leather and Abrasion Resistant Nylon

FOOTBED: Polyurethane

SHANK: Nylon

LAST: 692

CONSTRUCTION: Direct Attach

RATING: ASTM F2413-18, M/I/C, SD 35 PR, CSA Grade 1, SD+ Rated, PR, ASTM F3445-21, SR

EN ISO 20345: 2022 S7L HRO LG M SC

SIZES: D 6-12,13,14 EE 4-12,13,14,15,16

RATINGS

TECHNOLOGIES

L-protection[®]
LENZI

SOLE RESISTANCE CHART

Galvanext SD

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED

**RED WING SUPERSOLE[®] Men's 8-inch Boot****4435** ST MT EH

UPPER: Nubuck, Waterproof, Oiled and Waxed Leather

FOOTBED: Redbed[™] featuring Agion[®] anti-microbial treatment

SHANK: Fiberglass

LAST: 694

CONSTRUCTION: SuperSole[®] Welt

RATING: ASTM F2413-18, M/I/C, Mt EH

SIZES: D 7-12,13,14,15 EE 8-12,13,14 H 8-12,13

TECHNOLOGIES



SOLE RESISTANCE CHART

Horizon[™] DL SuperSole[®]

Oil/Gas	Best
Chemicals	Better
Abrasions	Better
Heat	Good
Non-Marking	Yes

ASSEMBLED
IN THE USA W/IMPORTED
COMPONENTS**RED WING ULTRAGUARD Men's 8-inch Boot****3241** NT PR MT SR EH

UPPER: Full Grain Leather

FOOTBED: Removable Polyurethane

SHANK: Nylon

LAST: RW51423

CONSTRUCTION: Direct Attach

RATING: ASTM F2413-18, M/I/C, Mt EH PR, ASTM F3445-21, SR, CSA Grade 1, ESR

Rated, PR, M, EN ISO 20345:2011 SB P E M WRU HRO FO SRC

SIZES: 35,36,37,38,39,40,41,42,43,44,45,46,47,48

RATINGS

TECHNOLOGIES

L-protection[®]
LENZI

SOLE RESISTANCE CHART

TredMax

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED

ST Steel Toe
Puntera de AceroAT Aluminum Toe
Puntera de AluminioNT Non-Metallic Toe
Puntera No Metálica Waterproof
Impermeable Insulated
Con Aislamiento

**RED WING TRUWELT Men's 10-inch Boot****4499** **UPPER:** Nubuck, Waterproof and Oiled Leather**FOOTBED:** Cambrelle® Covered Polyurethane**SHANK:** Steel**LAST:** 694**CONSTRUCTION:** Goodyear Leather Welt**RATING:** ASTM F2413-18, M/I/C, Mt EH, ASTM F3445-21, SR**SIZES:** D 7-12,13,14,15,16 EE 8-12,13,14

TECHNOLOGIES



SOLE RESISTANCE CHART

Vibram® Montana

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED

**NEW****RED WING RIO FLEX Men's 11-inch Pull-On Boot****3598** **UPPER:** Full Grain, Waterproof and Oiled Leather**FOOTBED:** Polyurethane**SHANK:** Nylon**LAST:** 689**CONSTRUCTION:** Welt**CARE:** Kit 3 - Waterproof Cleaner, Boot Oil, Leather Protector**RATING:** ASTM F2413-24, I/C, Mt EH PR, SR, ASTM F3445-21, SR, CSA Grade 1, ESR Rated, PR, M**SIZES:** B 8-12,13,14 D 7-12,13,14,15 EE 7-12,13,14,15

RATINGS

TECHNOLOGIES



SOLE RESISTANCE CHART

Red Wing BarnStormer

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED

**RED WING SUPERSOLE Men's 11-inch Pull-On Boot****4436** **UPPER:** Nubuck, Waterproof, Oiled and Waxed Leather**FOOTBED:** Redbed™ featuring Agion™ anti-microbial treatment**SHANK:** Fiberglass**LAST:** 696**CONSTRUCTION:** SuperSole® Welt**RATING:** ASTM F2413-18, M/I/C, Mt EH**SIZES:** B 10-12,13,14 D 7-12,13,14,15 EE 7-12,13,14 H 8-12,13

TECHNOLOGIES



SOLE RESISTANCE CHART

Horizon™ DL SuperSole®

Oil/Gas	Best
Chemicals	Better
Abrasions	Better
Heat	Good
Non-Marking	Yes

ASSEMBLED
IN THE **USA** W/IMPORTED
COMPONENTS**IRISH SETTER WORK KASOTA Men's 6-inch Boot****83644** **UPPER:** Nubuck, Waterproof and Waxed Leather and Abrasion Resistant Synthetic**FOOTBED:** Removable Memory Foam-EVA**SHANK:** Nylon**LAST:** 882**CONSTRUCTION:** Direct Attach**RATING:** ASTM F2413-18, M/I/C, Mt EH, ASTM F3445-21, SR**SIZES:** D 8-12,13,14 EE 8-12,13,14

TECHNOLOGIES



SOLE RESISTANCE CHART

TriTek

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED

PR Puncture Resistant
Resistente a las Perforaciones**MT** Metatarsal Guard
Protector del Metatarso**SR** Slip Resistant
Antidérapante**EH** Electrical Hazard
Peligro Eléctrico**SD** Static-Dissipative
Disipador de Estática

**WORX CARBIDE Men's 5-inch Hiker Boot****5491**    **UPPER:** Nubuck, Oiled and Waxed Leather and Abrasion Resistant Nylon**FOOTBED:** Removable PU with Added Foam**SHANK:** None**LAST:** 305**CONSTRUCTION:** Cement**RATING:** ASTM F2413-18, M/I/C, Mt EH, ASTM F3445-21, SR**SIZES:** M 7-12,13,14 WW 8-12,13,14

TECHNOLOGIES

**SOLE RESISTANCE CHART****ProTred I-0**

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED

**WORX CARBIDE Men's 6-inch Hiker Boot****5421**    **UPPER:** Suede Leather and Abrasion Resistant Mesh**FOOTBED:** Removable PU with Added Foam**SHANK:** Non-metallic**LAST:** 305**CONSTRUCTION:** Cement**RATING:** ASTM F2413-18, M/I/C, Mt EH, ASTM F3445-21, SR**SIZES:** M 7-12,13,14 WW 8-12,13,14

TECHNOLOGIES

**SOLE RESISTANCE CHART****ProTred I-0**

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED

**WORX TACONITE Men's 6-inch Boot****5486**    **UPPER:** Nubuck, Oiled and Waxed Leather**FOOTBED:** Removable Polyurethane**SHANK:** Steel**LAST:** 703**CONSTRUCTION:** Welt**RATING:** ASTM F2413-18, M/I/C, Mt EH, ASTM F3445-21, SR**SIZES:** M 7-12,13,14 WW 8-12,13

TECHNOLOGIES

**SOLE RESISTANCE CHART****Rubber Resister**

Oil/Gas	Best
Chemicals	Better
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED

**WORX AXIL Men's 8-inch Boot****5911**      **UPPER:** Nubuck, Waterproof, Oiled and Waxed Leather**FOOTBED:** Removable EVA**SHANK:** Fiberglass**LAST:** 694**CONSTRUCTION:** Welt**RATING:** ASTM F2413-18, M/I/C, Mt EH PR, ASTM F3445-21, SR, CSA Grade 1, ESR Rated, PR**SIZES:** M 7-12,13,14 WW 8-12,13,14

RATINGS


TECHNOLOGIES

**SOLE RESISTANCE CHART****Arrowhead XT**

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED



WOMEN'S

Footwear that's as tough as it gets and designed specifically for women.

TECHNOLOGIES

RED WING ECOLITE Women's Athletic

2287 **AT** **PR** **SR** **EH**

UPPER: Polyester Mesh

FOOTBED: EVA

SHANK: None

LAST: 305

CONSTRUCTION: Cement

RATING: ASTM F2413-18, F/I/C, EH PR, ASTM F3445-21, SR, CSA Grade 1, ESR Rated, PR

SIZES: B 5-10,11 D 5-10,11



RATINGS



TECHNOLOGIES



L-protection
LENZI



WOMENS
FIT



BIO
SPRING

SOLE RESISTANCE CHART

ReSurge

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED

RED WING ECOLITE Women's Oxford

2284 **AT** **SR** **EH**

UPPER: and Polyester Mesh

FOOTBED: Removable EVA

SHANK: None

LAST: 305

CONSTRUCTION: Cement

RATING: ASTM F2413-18, F/I/C, EH, ASTM F3445-21, SR

SIZES: B 5-10,11 D 5-10,11



TECHNOLOGIES



WOMENS
FIT



BIO
SPRING

SOLE RESISTANCE CHART

ReSurge

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED



Puncture Resistant
Resistente a las Perforaciones



Metatarsal Guard
Protector del Metatarso



Slip Resistant
Antidérapante



Electrical Hazard
Peligro Eléctrico



Static-Dissipative
Disipador de Estática



NEW

TRACTION TRED LITE Women's 6-inch Chelsea**3581** NT PR SR

UPPER: Full Grain, Waterproof, Oiled and Waxed Leather and Elastic Mesh

FOOTBED: Removable Polyurethane

SHANK: Nylon

LAST: 325

CONSTRUCTION: Welt

CARE: Kit 4 - Waterproof Cleaner, Mink Oil, Leather Protector

RATING: ASTM F2413-18, F/I/C, EH PR, ASTM F3445-21, SR, CSA Grade 1, ESR Rated, PR

SIZES: B 5-10,11 D 5-10,11

RATINGS



TECHNOLOGIES



SOLE RESISTANCE CHART

LiteTred DH

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED

**RED WING APEX Women's 5-inch Boot****2128** AT SR

UPPER: Nubuck, Waterproof and Frontier and Polyester Mesh

FOOTBED: Removable EVA

SHANK: TPU

LAST: 305

CONSTRUCTION: Cement

RATING: ASTM F2413-18, F/I/C, EH, ASTM F3445-21, SR

SIZES: B 5-10,11 D 5-10,11

TECHNOLOGIES



SOLE RESISTANCE CHART

ReGripDLT

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED

**RED WING EXOS LITE Women's 5-inch Boot****2459** AT SR

UPPER: Full Grain, Waterproof and Waxed Leather

FOOTBED: Removable Polyurethane

SHANK: Nylon

LAST: JV305

CONSTRUCTION: Cement

RATING: ASTM F2413-18, F/I/C, EH, ASTM F3445-21, SR

SIZES: B 5-10,11 D 5-10,11

TECHNOLOGIES



SOLE RESISTANCE CHART

Vibram® X-treme Lite

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Better
Non-Marking	Yes



GLOBALLY SOURCED



NEW

TRACTION TRED LITE Women's 5-inch Boot**2477** NT SR

UPPER: Nubuck, Oiled and Waxed Leather

FOOTBED: Removable Polyurethane

LAST: W325

CONSTRUCTION: Welt

CARE: Kit 2 - Foam Cleaner, All Natural Leather Conditioner, Leather Protector

RATING: ASTM 2413-24, I/C, EH, SRO, ASTM F3445-21, SR

SIZES: B 5-10,11 D 5-10,11

TECHNOLOGIES



SOLE RESISTANCE CHART

LiteTred

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED

**RED WING TRADESWOMAN Women's 6-inch Boot****3542** NT PR SR EH**UPPER:** Nubuck, Waterproof, Oiled and Waxed Leather and Abrasion Resistant Mesh**FOOTBED:** Removable Polyurethane**LAST:** 601-W**CONSTRUCTION:** Direct Attach**RATING:** ASTM F2413-18, F/I/C, EH PR, ASTM F3445-21, SR, CSA Grade 1, ESR Rated, PR**SIZES:** B 6-10,11 D 6-10,11

RATINGS



TECHNOLOGIES



SOLE RESISTANCE CHART

VersaTrax

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED

**NEW****TRUGUARD LITE Women's 6-inch Boot****3597** NT PR SR EH**UPPER:** Full Grain, Oiled and Waxed Leather**FOOTBED:** Polyurethane**SHANK:** Nylon**LAST:** 601**CONSTRUCTION:** Welt**CARE:** Kit 2 - Foam Cleaner, All Natural Leather Conditioner, Leather Protector**RATING:** ASTM F2413-24, I/C, EH, PR, SR, ASTM F3445-21, SR, CSA Grade 1, ESR Rated, PR**SIZES:** B 5-10,11 D 5-10,11

RATINGS



TECHNOLOGIES



SOLE RESISTANCE CHART

HDL Pivotal

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED

**RED WING KING TOE Women's 6-inch Boot****2242** NT SR EH**UPPER:** Nubuck, Waterproof and Waxed Leather**FOOTBED:** Removable Polyurethane**SHANK:** TPU**LAST:** JV2-0006**CONSTRUCTION:** Direct Attach**RATING:** ASTM F2413-18, F/I/C, EH**SIZES:** B 5-10,11 D 5-10 EE 6-10

TECHNOLOGIES



SOLE RESISTANCE CHART

TPU-PU Galaxy

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Good
Non-Marking	Yes



GLOBALLY SOURCED

**RED WING APEX Women's 6-inch Boot****2145** AT PR SR EH**UPPER:** Nubuck, Waterproof Leather and Recycled Mesh**FOOTBED:** EVA**SHANK:** TPU**LAST:** 305**CONSTRUCTION:** Cement**RATING:** ASTM F2413-18, F/I/C, EH, ASTM F3445-21, SR**SIZES:** B 5-10,11 D 5-10,11

TECHNOLOGIES



SOLE RESISTANCE CHART

ReGripDLT

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED

PR Puncture Resistant
Resistente a las Perforaciones**MT** Metatarsal Guard
Protector del Metatarso**SR** Slip Resistant
Antidérapante**EH** Electrical Hazard
Peligro Eléctrico**SD** Static-Dissipative
Disipador de Estática

**RED WING EXOS LITE Women's 6-inch Boot****2458** **UPPER:** Nubuck Leather**FOOTBED:** Removable Polyurethane**SHANK:** Nylon**LAST:** JV305**CONSTRUCTION:** Cement**RATING:** ASTM F2413-18, F/I/C, EH, ASTM F3445-21, SR**SIZES:** B 5-10,11 D 5-10,11

TECHNOLOGIES



SOLE RESISTANCE CHART

Vibram® X-treme Lite

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Better
Non-Marking	Yes



GLOBALLY SOURCED

**RED WING TRADESWOMAN Women's 6-inch Boot****2344** **UPPER:** Nubuck, Waterproof, Oiled and Waxed Leather and Abrasion Resistant Mesh**FOOTBED:** Removable Polyurethane**SHANK:** Nylon**LAST:** 601-W**CONSTRUCTION:** Direct Attach**RATING:** ASTM F2413-18, F/I/C, EH, ASTM F3445-21, SR**SIZES:** B 6-10,11 D 6-10,11

TECHNOLOGIES



SOLE RESISTANCE CHART

VersaTrax

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED

**RED WING TRACTION TRED LITE Women's 6-inch Boot****2444** **UPPER:** Nubuck, Waterproof and Oiled Leather**FOOTBED:** Removable Polyurethane**LAST:** 325**CONSTRUCTION:** Welt**RATING:** ASTM F2413-18, F/I/C, EH, ASTM F3445-21, SR**SIZES:** B 5-10,11 D 5-10,11

TECHNOLOGIES



SOLE RESISTANCE CHART

LiteTred

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED

**RED WING KING TOE Women's 6-inch Boot****2247** **UPPER:** Nubuck, Waterproof Leather**FOOTBED:** Nylon Covered Polyurethane**SHANK:** Non-metallic**LAST:** JV2-0006**CONSTRUCTION:** Direct Attach**RATING:** ASTM F2413-18, F/I/C, EH**SIZES:** B 5-10,11 D 5-10 EE 6-10

TECHNOLOGIES



SOLE RESISTANCE CHART

TPU-PU Galaxy

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Good
Non-Marking	Yes



GLOBALLY SOURCED


RED WING TRACTION TRED LITE Women's 8-inch Boot
3537 NT PR SR EH

UPPER: Full Grain, Waterproof and Waxed Leather

FOOTBED: Removable Polyurethane

LAST: 325

CONSTRUCTION: Welt

RATING: ASTM F2413-18, F/I/C, EH PR, ASTM F3445-21, SR, CSA Grade 1, ESR Rated, PR
SIZES: B 5-10,11 D 5-10,11

RATINGS

TECHNOLOGIES

SOLE RESISTANCE CHART
LiteTred

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED


RED WING BRNR XP Women's 8-inch Boot
3554 NT PR SR EH

UPPER: Full Grain, Waterproof Leather and Abrasion Resistant Mesh

FOOTBED: Quadrex V2 Multi-Layer System

SHANK: Fiberglass

LAST: 710

CONSTRUCTION: Direct Attach to Welt

RATING: ASTM F2413-18, F/I/C, EH PR, ASTM F3445-21, SR, CSA Grade 1, ESR Rated, PR
SIZES: B 6-10,11 D 6-10,11

RATINGS

TECHNOLOGIES

SOLE RESISTANCE CHART
Dual Density GripTek

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes



ASSEMBLED IN THE USA W/IMPORTED COMPONENTS


NEW
RED WING RIO FLEX Women's 9-inch Pull-On Boot
2278 ST SR EH

UPPER: Smooth Finish, Waterproof and Oiled Leather

FOOTBED: Polyurethane

SHANK: Nylon

LAST: 802

CONSTRUCTION: Welt

CARE: Kit 6 - Waterproof Cleaner, Leather Cream, Leather Protector

RATING: ASTM F2413-24, I/C, EH, SR, ASTM F3445-21

SIZES: B 5-10,11 D 5-10,11

TECHNOLOGIES

SOLE RESISTANCE CHART
Red Wing BarnStormer

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED


IRISH SETTER WORK NISSWA Women's Oxford
83242 AT SR EH

UPPER: Abrasion Resistant Mesh and TPU-Infused Nylon

FOOTBED: Removable Memory Foam-EVA

SHANK: None

LAST: 221

CONSTRUCTION: Cement

RATING: ASTM F2413-18, F/I/C, EH, ASTM F3445-21, SR

SIZES: B 5-10,11 D 6-10

TECHNOLOGIES

SOLE RESISTANCE CHART
Vibram® Beehive

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED


Puncture Resistant
 Resistente a las Perforaciones

Metatarsal Guard
 Protector del Metatarso

Slip Resistant
 Antidérapante

Electrical Hazard
 Peligro Eléctrico

Static-Dissipative
 Disipador de Estática


IRISH SETTER WORK CASCADE Women's 5-inch Hiker Boot
83244
UPPER: Full Grain, Waterproof Leather, Abrasion Resistant Mesh and TPU-Infused Nylon

FOOTBED: Removable EVA

SHANK: TPU

LAST: 221

CONSTRUCTION: Cement

RATING: ASTM F2413-18, F/I/C, EH, ASTM F3445-21, SR

SIZES: B 5-10,11 D 6-10

TECHNOLOGIES

SOLE RESISTANCE CHART
Vibram® Bayu

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED


NEW
IRISH SETTER WORK CASCADE Women's 5-inch Hiker Boot
83250
UPPER: Full Grain, Waterproof Leather, TPU-Infused Nylon and Abrasion-Resistant Mesh

FOOTBED: Removable EVA

SHANK: TPU

LAST: 221

CONSTRUCTION: Cement

RATING: ASTM F2413-18, F/I/C, EH, ASTM F3445-21, SR

SIZES: B 5-10,11 D 6-10

TECHNOLOGIES

SOLE RESISTANCE CHART
Vibram® Bayu

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED


NEW
IRISH SETTER WORK NISSWA Women's Hiking Boot
83246
UPPER: TPU-Infused Abrasion Resistant Nylon

FOOTBED: EVA with Memory Foam

LAST: 231

CONSTRUCTION: Cement

RATING: ASTM F2413-18, F/I/C, EH, ASTM F3445-21, SR

SIZES: B 5-10,11 D 6-10

TECHNOLOGIES

SOLE RESISTANCE CHART
Vibram® Beehive

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED


IRISH SETTER WORK CLEARWATER Women's 6-inch Boot
83268
UPPER: Full Grain, Waterproof Leather and Mesh Nylon

FOOTBED: EVA

SHANK: None

LAST: 223

CONSTRUCTION: Cement

RATING: ASTM F2413-18, F/I/C, EH, ASTM F3445-21, SR

SIZES: B 5-10,11 D 6-10


TECHNOLOGIES

SOLE RESISTANCE CHART
Vibram® Beehive

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED



NEW

WORX ESSENTIALS Women's Slip-On**5180** **ST** **SR** **EH**

UPPER: Full Grain, Waterproof and Waxed Leather

FOOTBED: TPE

SHANK: Fiberglass

LAST: 882-W

CONSTRUCTION: Cement

RATING: ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR

SIZES: M 4-10,11,12 W 5-10,11

TECHNOLOGIES



SOLE RESISTANCE CHART

EssentialsLite EH

Oil/Gas	Best
Chemicals	Best
Abrasions	Better
Heat	Better
Non-Marking	Yes



GLOBALLY SOURCED

NEW

WORX ESSENTIALS Women's Slip-On**5187** **ST** **SR** **SD**

UPPER: Full Grain Waxed Leather

FOOTBED: TPE

LAST: 882-W

CONSTRUCTION: Cement

RATING: ASTM F2413-18, M/I/C, SD 35, ASTM F3445-21, SR

SIZES: M 4-10,11,12 W 5-10,11

TECHNOLOGIES



SOLE RESISTANCE CHART

EssentialsLite SD

Oil/Gas	Best
Chemicals	Best
Abrasions	Better
Heat	Better
Non-Marking	Yes



GLOBALLY SOURCED

WORX ANTIMATTER Women's Athletic**5171** **AT** **PR** **SR** **EH**

UPPER: PU Coated Leather and Nylon Mesh

FOOTBED: Polyurethane

SHANK: None

LAST: 305

CONSTRUCTION: Cement

RATING: ASTM F2413-18, F/I/C, EH PR, ASTM F3445-21, SR, CSA Grade 1, ESR Rated, PR

SIZES: M 5-10,11,12 W 6-10,11

RATINGS

TECHNOLOGIES

**SWEN-FLEX®**

SOLE RESISTANCE CHART

CrossGrip

Oil/Gas	Best
Chemicals	Better
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED

WORX ANTIMATTER Women's Athletic**5164** **ST** **SR** **EH**

UPPER: PU Coated Leather and Nylon Mesh

FOOTBED: Removable Polyurethane

LAST: 305

CONSTRUCTION: Cement

RATING: ASTM F2413-18, F/I/C, EH, ASTM F3445-21, SR

SIZES: M 5-10,11,12 W 6-10,11



SOLE RESISTANCE CHART

CrossGrip

Oil/Gas	Best
Chemicals	Better
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED



Puncture Resistant
Resistente a las Perforaciones



Metatarsal Guard
Protector del Metatarso



Slip Resistant
Antidérapante



Electrical Hazard
Peligro Eléctrico



Static-Dissipative
Disipador de Estática

WORX NITRO Women's Oxford

5168   

UPPER: Full Grain, Oiled and Waxed Leather
FOOTBED: Polyurethane
SHANK: Fiberglass
LAST: 207JV
CONSTRUCTION: Cement

RATING: ASTM F2413-18, F/I/C, EH, ASTM F3445-21, SR
SIZES: M 5-10,11,12 W 6-10,11



SOLE RESISTANCE CHART

GumTek

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED

NEW

WORX ESSENTIALS Women's Oxford

5941    

UPPER: Full Grain, Waterproof and Waxed Leather
FOOTBED: TPE
SHANK: Fiberglass
LAST: 882-W
CONSTRUCTION: Cement

RATING: ASTM F2413-18, M/I/C, EH PR, ASTM F3445-21, SR, CSA Grade 1, ESR Rated, PR
SIZES: M 4-10,11,12 W 5-10,11



RATINGS

TECHNOLOGIES



SOLE RESISTANCE CHART

EssentialsLite EH

Oil/Gas	Best
Chemicals	Best
Abrasions	Better
Heat	Better
Non-Marking	Yes



GLOBALLY SOURCED

WORX ANTIMATTER Women's Athletic

5172   

UPPER: Polyester Mesh
FOOTBED: Polyurethane
SHANK: None
LAST: 305
CONSTRUCTION: Cement

RATING: ASTM F2413-18, F/I/C, SD 35, ASTM F3445-21, SR
SIZES: M 5-10,11,12 W 6-10,11



TECHNOLOGIES



SOLE RESISTANCE CHART

CrossGrip

Oil/Gas	Best
Chemicals	Better
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED

NEW

WORX ESSENTIALS Women's Oxford

5188   

UPPER: Full Grain Waxed Leather
FOOTBED: TPE
SHANK: Fiberglass
LAST: 882-W
CONSTRUCTION: Cement

RATING: ASTM F2413-18, M/I/C, SD 35, ASTM F3445-21, SR
SIZES: M 4-10,11,12 W 5-10,11



TECHNOLOGIES



SOLE RESISTANCE CHART

EssentialsLite SD

Oil/Gas	Best
Chemicals	Best
Abrasions	Better
Heat	Better
Non-Marking	Yes



GLOBALLY SOURCED



WORX CARBIDE Women's Athletic**5108** **AT** **SR** **EH****UPPER:** PU Coated Leather and Nylon Mesh**FOOTBED:** Removable Polyurethane**SHANK:** Non-metallic**LAST:** 228**CONSTRUCTION:** Cement**RATING:** ASTM F2413-18, F/I/C, EH, ASTM F3445-21, SR**SIZES:** M 5-10,11 W 6-10

TECHNOLOGIES

WOMENS**W-FIT****SOLE RESISTANCE CHART****Rubber-EVA Viper**

Oil/Gas	Good
Chemicals	Best
Abrasions	Best
Heat	Good
Non-Marking	No



GLOBALLY SOURCED

WORX CARBIDE Women's 5-inch Hiker Boot**5163** **ST** **MT** **SR** **EH****UPPER:** Nubuck, Oiled and Waxed Leather and Abrasion Resistant Nylon**FOOTBED:** Removable PU with Added Foam**SHANK:** None**LAST:** 305**CONSTRUCTION:** Cement**RATING:** ASTM F2413-18, F/I/C, Mt EH, ASTM F3445-21, SR**SIZES:** M 5-10,11,12 W 6-10,11

TECHNOLOGIES

HRO**WOMENS****W-FIT****SOLE RESISTANCE CHART****ProTred I-0**

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED

WORX ANTIMATTER Women's Hiker**5170** **ST** **SR** **EH****UPPER:** PU Coated Leather**FOOTBED:** Polyurethane**LAST:** 305**CONSTRUCTION:** Cement**RATING:** ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR**SIZES:** M 5-10,11,12 W 6-10,11

TECHNOLOGIES

HRO**WOMENS****W-FIT****SOLE RESISTANCE CHART****CrossGrip**

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED

WORX AXIL Women's 6-inch Boot**5919** **ST** **PR** **SR** **EH****UPPER:** Nubuck, Waterproof, Oiled and Waxed Leather**FOOTBED:** Removable EVA**SHANK:** Non-metallic**LAST:** 325B**CONSTRUCTION:** Welt**RATING:** ASTM F2413-18, F/I/C, EH PR, ASTM F3445-21, SR, CSA Grade 1, ESR Rated, PR**SIZES:** M 5-10,11,12 W 6-10,11

TECHNOLOGIES

SWEN-FLEX**HRO****WOMENS****W-FIT****SOLE RESISTANCE CHART****Arrowhead XT**

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED

**Puncture Resistant**
Resistente a las Perforaciones**Metatarsal Guard**
Protector del Metatarso**Slip Resistant**
Antidérapante**Electrical Hazard**
Peligro Eléctrico**Static-Dissipative**
Disipador de Estática

**WORX AXIL Women's 6-inch Boot****5161** **UPPER:** Nubuck, Waterproof, Oiled and Waxed Leather and Canvas**FOOTBED:** Removable EVA**SHANK:** Fiberglass**LAST:** 325B**CONSTRUCTION:** Welt**RATING:** ASTM F2413-18, F/I/C, EH, ASTM F3445-21, SR**SIZES:** M 5-10,11,12 W 6-10,11

TECHNOLOGIES



SOLE RESISTANCE CHART

Arrowhead XT

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED

**WORX CARBIDE Women's 6-inch Boot****5152** **UPPER:** Full Grain Leather and Abrasion Resistant Mesh**FOOTBED:** Removable PU with Added Foam**SHANK:** Non-metallic**LAST:** 305**CONSTRUCTION:** Cement**RATING:** ASTM F2413-18, F/I/C, Mt EH, ASTM F3445-21, SR**SIZES:** M 5-10,11,12 W 6-10,11

TECHNOLOGIES



SOLE RESISTANCE CHART

ProTred I-0

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Best
Non-Marking	Yes



GLOBALLY SOURCED

**WORX ELECTRUM Women's 6-inch Boot****5179** **UPPER:** Full Grain, Waterproof, Oiled and Waxed Leather**FOOTBED:** Polyurethane**SHANK:** Fiberglass**LAST:** 691**CONSTRUCTION:** Direct Attach**RATING:** ASTM F2413-18, F/I/C, EH**SIZES:** M 5-10,11,12 W 6-10,11

TECHNOLOGIES



SOLE RESISTANCE CHART

PU Cascade I

Oil/Gas	Best
Chemicals	Best
Abrasions	Best
Heat	Good
Non-Marking	Yes



GLOBALLY SOURCED

**NEW****WORX ESSENTIALS Women's Chelsea****5181** **UPPER:** Full Grain, Waterproof and Waxed Leather**FOOTBED:** TPE**SHANK:** Fiberglass**LAST:** 882-W**CONSTRUCTION:** Cement**RATING:** ASTM F2413-18, M/I/C, EH, ASTM F3445-21, SR**SIZES:** M 4-10,11,12 W 5-10,11

TECHNOLOGIES



SOLE RESISTANCE CHART

EssentialsLite EH

Oil/Gas	Best
Chemicals	Best
Abrasions	Better
Heat	Better
Non-Marking	Yes



GLOBALLY SOURCED

Steel Toe
Puntera de Acero **Aluminum Toe**
Puntera de Aluminio **Non-Metallic Toe**
Puntera No Metálica **Waterproof**
Impermeable **Insulated**
Con Aislamiento

FOOTWEAR TECHNOLOGY REFERENCE

DEVELOPING PURPOSE-BUILT WORK BOOTS TO PROTECT WORKERS

Red Wing Shoe Company footwear is renowned for leading-edge technologies that ensure premium performance for the life of the product. These technologies ensure comfortable protection for modern craftsmen.




UPPER TECHNOLOGY

BOA®

Boa® Lacing System
Revolutionary closure system

Boa® technology makes getting in and out of lace-up boots faster and easier than ever. Turn the dial to tighten laces to the perfect tension, with no pressure points. One click of the reel releases the laces instantly.



Quick on and off convenience

CUSHIN

Cushin
Comfort tongue technology

Minimizes pressure some workers feel on their shin or ankle from the top of the boot tongue. A four-way stretch nylon offers relief and flexibility while walking, and an internal padded waffle mesh maintains premium comfort.



Minimizes pressure on shin

KING TOE

King Toe®
More toe room

Larger toe box provides 44% more toe room and comfort than our standard work boots.



44% more toe room

ARMA-TEC

ArmaTec™
Added protection for durability

This technology is a protective covering that is incredibly tough and abrasion resistant. Placement of ArmaTec in high wear areas helps preserve and lengthen the life of a boot.

R | W
LEATHER

Red Wing Leather
Handcrafted leather from S.B. Foot Tanning Co.

Starting with hides from U.S. raised cattle with minimal surface imperfections, we control every step of the process, using time-honored techniques to craft leather with natural beauty and unmatched durability.

TROUT BROOK
LEATHER

Trout Brook Leather
Handcrafted leather from S.B. Foot Tanning Co.

Starting with hides from U.S. raised cattle with minimal surface imperfections, we control every step of the process, using time-honored techniques to craft leather with natural beauty and unmatched durability.

GOODHUE


Goodhue Leather
Consistent, durable leather from S.B. Foot Tanning Co.

Handcrafted, full grain leather manufactured by our S.B. Foot Tanning Company in Red Wing, Minnesota. Goodhue Leather is crafted using time-proven techniques, to yield the right color, consistency and durability.

DYNAMIC FIT SYSTEM

DYNAMIC FIT SYSTEM
Locks in foot with room to move

This purposeful innovation for pull-on boots is designed to lock the foot in place with side stretch panels that allow for flexible and comfortable movement throughout the day. The stretch panels subtly yield to the pressure of the foot inside the boot, expanding just enough to allow the boot to slip on for easy entry and easy exit.




Side stretch panels allow for flexible movement

FORCE GUARD

ForceGuard™
Added protection for durability

This technology is a protective covering that provides long-wearing abrasion, oil and chemical resistance on critical areas of the boot.




Rubber covering for durability

FORCE SHIELD

ForceShield™
Flexible impact absorption

A revolutionary thin, soft material that offers amazing impact absorption yet it is flexible and comfortable. ForceShield provides protection from dangerous workplace drop and impact hazards while meeting ASTM standards.




Force from impact is dissipated

SCREEN SHIELD

SCREENSHIELD
Lightweight abrasion resistance

A thin but highly durable rubber coating for the toe and other high-wear areas of a work boot that enhances durability with minimal weight.



Thin coating provides durability.

SWITCHBACK SUPPORT SYSTEM

SWITCHBACK SUPPORT SYSTEM
Less weight, superior performance

Built with an integrated TPU-cord construction, this next-generation upper design approach incorporates an innovative "switchback" technique that requires less material and relies on fewer leather overlaps than a traditional work boot.



Lightweight TPU-cord provides support and durability.

INJEX

InJex™
Injected polyurethane material

InJex™ injected polyurethane is a lightweight material specially formulated to provide excellent durability and support.



LINING TECHNOLOGY



GORE-TEX WATERPROOF MEMBRANE

Prevents water getting in, while perspiration moves out

Red Wing uses GORE-TEX for the ultimate in comfort and protection. The GORE-TEX membrane blocks moisture from the outside, while allowing moisture inside to evaporate. GORE-TEX has over 9 billion pores per square inch that prevent water from getting to your feet while allowing sweat vapor to pass right through, keeping your feet dry and comfortable in all conditions.



ULTRADRY™ WATERPROOFING SYSTEM

Our UltraDry™ construction combines a moisture management lining with waterproof components for dry, long-lasting comfort and performance.



PRIMALOFT® INSULATION

Designed for repeated compression and durability over time. Featuring 90% post-consumer recycled fibers made from plastic bottles, this unique low-bulk construction maintains loft and traps body heat even when compressed. Coupled with a permanent water repellent treatment with high-density construction, this insulation keeps feet warm in dry or wet conditions.



SCENTBAN™

An Irish Setter exclusive scent control process, ScentBan™ is added to various materials from leathers to linings to footbeds, killing bacteria that cause odors.



BLOOD-BORNE PATHOGEN PROTECTION

Provides resistance to penetration of blood-borne pathogens

Incorporates a waterproof membrane that is highly breathable. In addition, the membrane has been shown to provide resistance to penetration of blood-borne pathogens per ASTM F1671. However, no product offers total protection. In spite of the high quality standards to which this footwear and the membrane are produced, the barrier properties can be compromised by many factors, including wear, tears, delamination, sewing or imperfect seams.

Under no circumstances will Red Wing Shoe Company, Inc., or the manufacturer of the membrane, be responsible for damages arising from the use of this product.



RED WING WATERPROOF

3-layers for waterproof protection

This system uses a 3-layer approach to keep feet dry. 1 - Linings help move moisture away from the foot to keep it dry. 2 - Foam provides cushioning and a comfortable fit. 3 - A waterproof bootie is a barrier to keep water out. Tricot, a protective material, is applied to the outside of the bootie to ensure a complete waterproof system.



Perspiration moves away from the foot while water stays out.



COSMOCOMFORT

Keeps feet warm, dry and comfortable

This technology provides the equivalent of 400 grams of insulation without the weight, thickness or bulk. A revolutionary manufacturing process transfers aluminum from a solid to a gas and back to a solid again, producing an extremely lightweight and paper-thin material with superior insulation, waterproofing and windproofing properties, plus exceptional breathability.



3M™ THINSULATE™ INSULATION

The ultimate insulation for long hours

The ultimate insulation for cold weather boots, 3M™ Thinsulate™ Ultra Insulation is thin, warm and lightweight, with the durability to withstand long hours of hard wear and keep feet warm even in damp conditions.



CROSSBREEZE

Instant cooling system

CrossBreeze technology moves heat away from the skin above, around and below the foot, creating an instant cooling effect.



Mesh lining and insole top fabric work together to move heat away



INSOLE TECHNOLOGY



COMFORTFORCE®

Removable footbed

This removable footbed features unique Venturi air perforations to help keep feet cool and dry all day. The special weave pattern helps channel the energy caused by walking, and the arch is curved to add extra comfort. Provides extra comfort.



CSA GRADE 1 & ESR CLASSIFICATION

Canadian Standards Association approval

Refers to the Canadian Standards Association's (CSA) approval (CAN/CSA-Z195-09) for protective footwear.



DYNAFORCE®

Reduces underfoot pressure

A built-in insole system that absorbs pressure and provides overall support, stability and comfort. This innovative technology dramatically reduces underfoot pressure, and blocks painful pressure points by redistributing them evenly across the foot while minimizing shock.



Absorbs pressure,
provides support



RW REDBED™

4-layer underfoot comfort system


Advanced comfort via 4-layer construction of a moisture managing fabric cover, impact absorbing urethane foam, heel and motion wrap-around stabilizer and heel strike gel elastomer cushion pad. Also features perforated ventilation, instep supporting columns, longitudinal arch support and engineered heel wall geometry for upper heel strike control.



FLEXFORCE®

Flexible forefoot, stable heel

This technology combines increased flexibility in the forefoot with a stable platform in the heel. A superior dual-construction process incorporates a welted heel for extra stability, with flexible cement construction in the forefoot for added cushion and a comfortable fit. Elements from our exclusive DynaForce® insole are built in to reduce underfoot pressure.

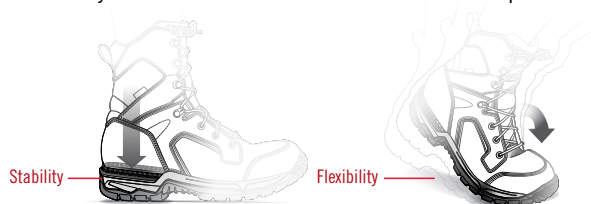

STABLEFLEX™

This technology combines increased flexibility in the forefoot with a stable platform in the heel. Our superior dual-construction process incorporates a welted heel for extra stability, with cement construction in the forefoot for added flexibility and a comfortable fit.



SWEN-FLEX®

Non-metallic, puncture-resistant insoles

These non-metallic, puncture-resistant insoles are manufactured from high-strength, woven fibres. They meet or exceed all world standards for puncture resistance, including CSA, ASTM and EN.



SOLE TECHNOLOGY



BIOSPRING

Sustainable midsole.


Made with a blend of EVA and sugarcane. The raised topline and high rebound midsole compound provide 360° of support and all-day comfort.



WORX® STARGRIP® SOLE

Superior slip-resistance

StarGrip® Technology features an 8-sided design and a unique concave shape of the star pad sole, allowing it to act like a mini suction cup to provide greater grip of the surface.



Unique Concave Shape



ENERG


Strategically placed high-rebound polyurethane or EVA brings high-end athletic shoe technology to more practical applications, delivering a recharging burst of energy with every step.



SUPERSOLE® 2.0

Comfort inside. Durable outside.

Dual density urethane sole designed with inner sole to provide cushion and comfort, and outer sole to provide durability and protection. This premium sole not only provides top performance in traction, abrasion resistance, cut resistance, oil and chemical resistance, but also delivers maximum comfort.



Top performing premium sole.



EXTRALIGHT® SOLE COMPOUND

Performance without the weight.

Made with a special blown EVA compound, ExtraLight® technology produces an incredibly lightweight and durable outsole that provides excellent compression qualities, is highly slip resistant, and offers best-in-class oil and chemical resistance.



X-Lite Sole



SUPERSOLE®

Comfort inside. Durable outside.

Single density urethane sole designed to provide durability and comfort. It delivers performance factors of abrasion resistance, cut resistance, traction, and oil and chemical resistance.



Mini Lug SuperSole®



HEAT-RESISTANT OUTSOLES

Performance on hot surfaces

Soles that have been designed and tested to perform on high heat surfaces. Soles identified as HRO are heat resistant to melting at a minimum of 475° Fahrenheit.



Durable sole resists melting.



VIBRAM®

Versatile, performance outsoles.

Exceptional design intersects with innovative rubber compounds to create versatile, performance outsoles. Vibram® outsoles offer excellent traction and high abrasion resistance in a multitude of environments.



Vibram® UltraSole



RPM™ TECHNOLOGY

A breakthrough composite material that significantly reduces the weight of the boot, providing extreme comfort and added endurance. Engineered to provide the durability and strength of traditional materials without the extra weight.



VIBRAM® LITEBASE

Reduces weight but maintains performance.

This advanced technology reduces rubber thickness by up to 50% while keeping the lug configuration unchanged. The end result is an extremely lightweight sole with no tradeoffs in traction, durability or wear resistance.



Vibram® X-Treme Lite Sole

Footwear Size Comparison Chart for Most Common International Systems

Please note that there is no real standard for converting shoes.

Your best option is to have your foot measured professionally at a local shoe store and get the Men's and Women's sizes directly from the measurement device.

USA Men's			3.5	4	4.5	5	5.5	6	6.5	7	7.5	8	8.5	9	9.5	10	10.5	11	11.5	12	13	14	15	16
USA Women's	4	4.5	5	5.5	6	6.5	7	7.5	8	8.5	9	9.5	10	10.5	11	12								
European	33.5	34	34.5	35	36	37	37.5	38	38.5	39	40	41	41.5	42	42.5	43	43.5	44	45	46	47	48	49	50
British	1.5	2	2.5	3	3.5	4	4.5	5	5.5	6	6.5	7	7.5	8	8.5	9	9.5	10	10.5	11	12	13	14	15
cm Men's			21.5	22	22.5	23	23.5	24	24.5	25	25.5	26	26.5	27	27.5	28	28.5	29	29.5	30	31	32	33	34
cm Women's	21	21.5	22	22.5	23	23.5	24	24.5	25	25.5	26	26.5	27	27.5	28	28.5								

WORK ENVIRONMENT HAZARDS

Every work environment exposes workers to different types of hazards. Each employer is required to perform a workplace assessment to determine the presence of work hazards and the need for personal protective equipment (PPE). In the case of foot injuries, common potential hazards include falling or rolling objects, electrical shock or piercing of footwear soles with sharp objects. There are countless situations and hazards that occur in the workplace everyday that can cause serious foot injury. The best protection from the work hazards that you can and cannot anticipate is quality PPE. For footwear, Red Wing Shoe Company is committed to providing quality, safety footwear for many types of workers and their working environments.

The footwear protection guidelines in this catalog were gathered to provide a general overview and quick comparison of global footwear safety standards. This information is not a definitive standard and we encourage you to refer to the official safety standard for clarification.

PROTECTION STANDARDS Red Wing safety shoes and boots adhere to the most rigorous industry safety standards, regardless of how extreme the conditions. Workers the world over have come to depend on Red Wing boots as the standard in safety footwear performance. Two major governing bodies regulate safety standards in North America: ASTM and CSA.


ASTM International: ASTM plays a leadership role in setting safety standards for footwear and other products.

ASTM F2413-18: Standard Specification for Performance Requirements for Protective (Safety) Toe Cap Footwear. Applies to the following hazards: I, C, Mt, Cd, EH, SD, PR

I/C: This protection signifies impact and compression resistance. It determines a shoe's capacity to protect the toe area against falling or rolling objects.

SD: There are three levels of SD protection - 10, 35 or 100.

ASTM F2413-24: ASTM updated this standard in 2024 to include specific reference to slip resistance (SR) and (SRO) performance. Red Wing will retest all products to the updated standard.

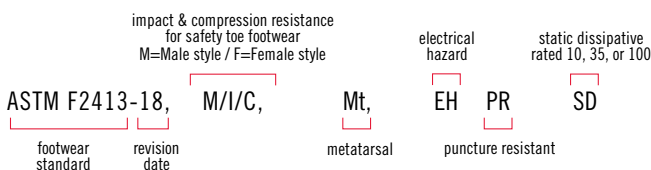

Canadian Standards Association (CSA): CSA is a not-for-profit, membership-based association that develops Canadian standards to enhance public safety and health. The standard for foot protection is listed as CSA approved.

CSA Grade 1: Refers to the Canadian Standards Association's (CSA) approval (CAN/CSA-Z195-14) for protective footwear.



Green triangle indicates sole puncture protection with a Grade 1 protective toe cap.




orange tag

Indicates soles that provide resistance to electrical shock. Under dry conditions, leakage current shall not exceed 1 mA when footwear is exposed to 18 kV at 60Hz for 1 minute.

ASTM F2892-18: Refers to the ASTM Standard Specification for Performance Requirements for Soft Toe Protective Footwear (Non-Safety/Non-Protective Toe). ASTM developed non-safety toe cap (soft toe) requirements to allow manufacturers to demonstrate the performance level of non-safety toe cap (soft toe) footwear. This specification covers minimum requirements for the performance of footwear to provide protection against a variety of workplace hazards other than the toe area that can potentially result in injury, for example, electrical hazard and static dissipative.

Conductive Footwear: Designed to dissipate static electricity from the body, through the shoes into grounded floors. Minimizes static electricity, which reduces the possibility of ignition of volatile chemicals or explosives. **WARNING:** Conductive footwear is not to be worn near open electrical circuits or highly charged objects of any kind requiring electrical hazard (non-conductive) footwear. Red Wing does not currently manufacture or market conductive footwear.

TOE PROTECTION Heavy falling or dropped objects and vehicles in motion are work hazards your customers face every day. In many cases, employers require protective footwear; in other cases, it just makes good sense. Red Wing has three types of toe caps to choose from. All of Red Wing's safety toe footwear meets ASTM F2413-18, I/C standards for impact and compression.



Steel Toe: Made of one of the most durable and dependable materials on earth, steel toe caps provide ultimate protection for the most hazardous environments.



Non-metallic Toe: Made from varying combinations of nylon, plastic, and fiberglass, this toe cap provides the protection of a steel toe cap without the inconvenience of tripping metal detectors.



Aluminum Toe: Made from aluminum material, these caps are 31% lighter than steel while still meeting the same safety standards.



TESTING: Impact Resistance tests the shoe's capacity to protect the toe area of the foot against falling objects. For Impact testing, a weight is dropped onto the protective toe cap area of the footwear. The clearance remaining inside the cap after impact is then determined. Each standard identifies the atmospheric conditions of the test, the shape of the striker, the amount of weight and distance from which the weight must be dropped, the velocity of the drop and the impact energy delivered.

Left: The weight is dropped onto the protective toe cap area.



TESTING: Compression Resistance tests the shoe's capacity to protect the toe area of the foot against heavy rolling objects. For Compression testing, the toe cap area of the footwear is compressed between parallel platens at a given rate of speed until the required compressive force is reached. The clearance remaining inside the cap after the compression is then determined.

Left: The toe cap is being compressed between the parallel platens.

OTHER PROTECTION CHARACTERISTICS Red Wing designs and builds boots with protection for various applications, including Electrical Hazard, Static-Dissipative, Puncture Resistant, and Metatarsal Guard. All Red Wing safety footwear manufactured after 10/1/18 for use in North America meets ASTM F2413-18 standards.

PR PUNCTURE RESISTANT




Puncture Resistant standards for reducing the possibility of puncture wounds to the sole of the foot by penetrating objects. Footwear contains a puncture-resistant protective device, such as the midsole, that must be an integral part of the shoe to meet ASTM F2413-18. Must withstand a minimum force of not less than 270 pounds-force.

TESTING: Puncture resistant devices are tested using a sharp steel pin forced into the device at a given speed. The force required to puncture through the device is measured. The devices are also tested for flexibility and corrosion resistance.

Right: The steel pin is forced into the midsole to determine the amount of force required to puncture the material.



MT METATARSAL GUARD



Metatarsal Guard standards for protection of the upper foot and toe area. Developed to reduce or prevent injury to the wearer's metatarsal area (instep) and toes from "drop" hazards.

TESTING: For testing, a wax form is fit into the footwear and a weight is dropped onto the protected metatarsal area of the footwear, similar to the impact test. The height of the wax form after impact is then determined.

Right: The weight is dropped on the protected metatarsal area.



EH ELECTRICAL HAZARD



Electrical Hazard protective sole and heel. The sole construction of this footwear is designed to reduce hazards due to contact of the outsole with electrically energized parts, to provide a secondary source of protection. EH designates footwear that is designed to withstand 18,000 volts (rms) at 60Hz for one minute with no current flow or leakage in excess of 1.0 milliamperes (mA) under dry conditions.

WARNINGS: EH footwear is not to be worn near explosives or in other environments requiring conductive footwear. EH protection is severely deteriorated in the following conditions: excessive wear on the soling material or exposure to wet or humid environments or both.

TESTING: To test electric shock resistant properties, the footwear is placed on a metal mesh platform acting as a large electrode. The footwear is filled with small metal spheres and a second electrode is placed within the spheres. A specified high voltage is applied to the footwear through the metal platform for a given length of time. Resistance is determined by the current flow (or leakage) through the footwear.

Right: The boot is placed on the metal mesh platform. The gauges measure leakage through the footwear.



SD STATIC-DISSIPATIVE



Static-Dissipative standards for the reduction of the accumulation of excess static electricity by conducting the charge from the body to the ground, while maintaining electrical resistance from one of the three levels noted below:

- 10^6 ohms (1 megohm) to 10^7 ohms (10 megohms)
- 10^6 ohms (1 megohm) to 3.5×10^7 ohms (35 megohms)
- 10^6 ohms (1 megohm) to 10^8 ohms (100 megohms).

RECOMMENDED: Static-dissipative footwear should be worn only in clean environments and in conjunction with static-dissipative flooring.

TESTING: Test methods for Static Dissipation vary by standard, using either human subjects or metal spheres inside footwear that are placed on either a wet or dry base electrode plate. A specified voltage is applied for a prescribed time and the electrical resistance is measured. Test conditions also vary in specified atmospheric conditions.

Right: The tester steps on the base electrode plate while the electrical resistance is measured.



DISCLAIMER: Red Wing Shoe Company, Inc. and their agents expressly state that these descriptions do not represent the actual formal standard - it only provides a quick comparison and general descriptions of testing methods and requirements. Refer to the actual published standards for specific requirements.

This general standards reference guide does not purport to address all of the safety concerns, if any, associated with its use. It is the responsibility of the user of these standards to establish appropriate safety and health practices and determine the applicability of regulatory limitations prior to use.

The standards are subject to revision at any time by the responsible technical committee(s). ASTM standards must be reviewed every five years and if not revised, either re-approved or withdrawn.

DISCLAIMER: While all Red Wings protect your feet in one way or another, accidents can still happen and injuries can still occur. In an effort to prevent or minimize injury in the event of an accident, we offer footwear with the features above for added protection for your feet from the dangers of the job.

RED WING WARRANTY

LIMITED WARRANTY RELATING TO RED WING BRANDED FOOTWEAR:

Footwear products bearing the “Red Wing” or “Red Wing Shoes” label are warranted against defects in workmanship and materials. If within 12 months of purchase from an authorized seller, a defect occurs in a Red Wing branded footwear product as the result of normal use, Red Wing will repair the defect or exchange the product. Product failures caused by excessive or abusive wear conditions do not qualify for exchange or purchase credit. This warranty is available only to the original purchaser and is not transferable. No adjustment will be given without the original receipt of purchase from an authorized seller. Return your footwear to the place of purchase or to any Red Wing Shoes retail store.

DISCLAIMER: The limited warranty relating to Red Wing branded footwear is in lieu of any other express warranty. No agent, employee or representative of Red Wing has any authority to bind Red Wing to any affirmation, representation or warranty concerning Red Wing branded footwear products, except as stated herein. Red Wing shall not be liable for any consequential, incidental or punitive damages.

This limited product warranty gives you specific legal rights, and you may also have other rights that vary from state to state. Any implied warranties shall be effective for a period not exceeding 12 months from the date of purchase from an authorized seller. Some states do not allow manufacturers to impose time limitations on certain implied warranties, so the above limitation may not apply to you.



If during the first thirty (30) days immediately following your purchase you are not satisfied with the comfort of your Red Wing branded work footwear for whatever reason, Red Wing will exchange or refund the purchase price to you, no questions asked, provided you still have your dated receipt of purchase. No adjustment will be given without the original receipt of purchase. You must return your footwear to the Red Wing Shoe dealer from which the footwear was purchased. Limit one return per purchase. This guarantee does not apply to WORX, Red Wing Heritage, Irish Setter or Vasque branded footwear.

IRISH SETTER WARRANTY

LIMITED WARRANTY RELATING TO IRISH SETTER FOOTWEAR

This warranty is available only to the original purchaser and is not transferable. No adjustment will be given without the original receipt of purchase from an authorized seller. You must return your footwear to the Irish Setter seller from which the footwear was purchased.

Irish Setter Work branded footwear products are warranted against defects in workmanship and materials. If within 6 months of purchase from an authorized seller, a defect occurs in an Irish Setter Work branded footwear product as the result of normal use, Red Wing Brands of America, Inc. (“Red Wing”) will repair the defect or exchange the product. Product failures caused by excessive or abusive wear conditions do not qualify for exchange or purchase credit.

Irish Setter Hunt branded footwear products are warranted against defects in workmanship and materials. If within 12 months of purchase from an authorized seller, a defect occurs in an Irish Setter Hunt branded footwear

product as the result of normal use, Red Wing Brands of America, Inc. (“Red Wing”) will repair the defect or exchange the product. Product failures caused by excessive or abusive wear conditions, or if worn for occupational purposes, do not qualify for exchange or purchase credit.

DISCLAIMER: The limited warranty relating to Irish Setter branded footwear is in lieu of any other express warranty. No agent, employee or representative of Red Wing has any authority to bind Red Wing to any affirmation, representation or warranty concerning Irish Setter branded footwear products, except as stated herein. Red Wing shall not be liable for any consequential, incidental or punitive damages.

This limited product warranty gives you specific legal rights, and you may also have other rights that vary from state to state. Any implied warranties shall be effective for a period not exceeding 6 months from the date of purchase from an authorized seller. Some states do not allow manufacturers to impose time limitations on certain implied warranties, so the above limitation may not apply to you.

WORX WARRANTY

LIMITED WARRANTY RELATING TO WORX FOOTWEAR:

WORX branded footwear products are warranted against defects in workmanship and materials. If within 6 months of purchase from an authorized seller, a defect occurs in a WORX branded footwear product as the result of normal use, Red Wing Brands of America, Inc. (“Red Wing”) will repair the defect or exchange the product. Product failures caused by excessive or abusive wear conditions do not qualify for exchange or purchase credit. This warranty is available only to the original purchaser and is not transferable. No adjustment will be given without the original receipt of purchase from an authorized seller. You must return your footwear to the WORX seller from which the footwear was purchased.

DISCLAIMER: The limited warranty relating to WORX branded footwear is in lieu of any other express warranty. No agent, employee or representative of Red Wing has any authority to bind Red Wing to any affirmation, representation or warranty concerning WORX branded footwear products, except as stated herein. Red Wing shall not be liable for any consequential, incidental or punitive damages.

This limited product warranty gives you specific legal rights, and you may also have other rights that vary from state to state. Any implied warranties shall be effective for a period not exceeding 6 months from the date of purchase from an authorized seller. Some states do not allow manufacturers to impose time limitations on certain implied warranties, so the above limitation may not apply to you.

CHANGE NOTICE

We have made every effort to make this catalog accurate. Due to improvement of product performance and availability of materials, there may be specification changes made during the year. Red Wing Brands of America, Inc. reserves the right to discontinue or drop products, sizes, widths or styles without prior notice. Policies, specifications and designs are subject to change without notice. For current warranty information, including return policies, please visit our website at: www.redwingshoes.com/red-wing-shoes-warranty

FOOTWEAR INDEX

STYLE #	Prod Pg	ST	AT	NT	☔	☁	PR	MT	SR	EH	SD
2117	57			•	•	•			•	•	
2120	57			•	•	•			•	•	
2128	74		•	•	•	•			•	•	
2129	21		•	•	•	•			•	•	
2144	28		•	•	•	•			•	•	
2145	75		•	•	•	•			•	•	
2146	28		•	•	•	•			•	•	
2180	14		•	•	•	•			•	•	
2181	34		•	•	•	•			•	•	
2182	13		•	•	•	•			•	•	
2204	59	•		•	•	•			•	•	
2217	57	•		•	•	•			•	•	
2219	56	•		•	•	•			•	•	
2227	59	•		•	•	•			•	•	
2230	60	•		•	•	•			•	•	
2231	62	•		•	•	•			•	•	
2240	30			•	•	•			•	•	
2241	34			•	•	•			•	•	•
2242	75			•	•	•			•	•	
2243	30			•	•	•			•	•	
2244	48			•	•	•			•	•	
2245	33	•		•	•	•			•	•	
2247	76			•	•	•			•	•	
2251	62	•		•	•	•			•	•	
2260	27			•	•	•			•	•	
2272	60	•		•	•	•			•	•	
2276	60	•		•	•	•			•	•	
2277	60	•		•	•	•			•	•	
2278	77	•		•	•	•			•	•	
2279	61	•		•	•	•			•	•	
2280	50			•	•	•			•	•	
2281	13		•	•	•	•			•	•	
2282	13		•	•	•	•			•	•	
2283	21		•	•	•	•			•	•	
2284	73		•	•	•	•			•	•	
2286	13		•	•	•	•			•	•	
2287	73		•	•	•	•			•	•	
2298	33			•	•	•			•	•	
2344	76			•	•	•			•	•	
2400	29			•	•	•			•	•	
2401	29		•	•	•	•			•	•	
2403	30			•	•	•			•	•	
2406	34	•		•	•	•			•	•	
2408	50	•		•	•	•			•	•	
2412	45	•		•	•	•			•	•	
2414	46	•		•	•	•			•	•	
2415	30			•	•	•			•	•	
2418	48			•	•	•			•	•	
2440	31			•	•	•			•	•	
2442	49			•	•	•			•	•	
2444	76			•	•	•			•	•	
2446	15			•	•	•			•	•	
2447	31			•	•	•			•	•	
2448	14			•	•	•			•	•	
2449	31			•	•	•			•	•	

STYLE #	Prod Pg	ST	AT	NT	☔	☁	PR	MT	SR	EH	SD
2452	25		•	•	•	•			•	•	
2453	29		•	•	•	•			•	•	
2458	76		•	•	•	•			•	•	
2459	74		•	•	•	•			•	•	
2461	14			•	•	•			•	•	
2462	31			•	•	•			•	•	
2475	25			•	•	•			•	•	
2476	34			•	•	•			•	•	
2477	74			•	•	•			•	•	
2491	48	•		•	•	•			•	•	
2499	61	•		•	•	•			•	•	
2531	62	•		•	•	•			•	•	
2533	50	•		•	•	•			•	•	
2534	49	•		•	•	•			•	•	
2545	32	•		•	•	•			•	•	
2551	32			•	•	•			•	•	
2552	32			•	•	•			•	•	
2553	49			•	•	•			•	•	
3028	33			•	•	•			•	•	
3029	27			•	•	•			•	•	•
3030	46			•	•	•			•	•	
3033	70			•	•	•			•	•	
3034	70			•	•	•			•	•	•
3035	47			•	•	•			•	•	•
3090	12			•	•	•			•	•	
3091	12			•	•	•			•	•	
3092	12			•	•	•			•	•	
3093	11			•	•	•			•	•	
3094	11			•	•	•			•	•	
3095	11			•	•	•			•	•	
3241	70			•	•	•			•	•	
3259	19			•	•	•			•	•	
3263	45			•	•	•			•	•	
3265	45			•	•	•			•	•	
3266	50			•	•	•			•	•	
3295	19			•	•	•			•	•	
3504	25	•		•	•	•			•	•	
3505	62	•		•	•	•			•	•	
3506	26			•	•	•			•	•	
3507	33	•		•	•	•			•	•	
3508	49	•		•	•	•			•	•	
3516	69			•	•	•			•	•	
3519	26			•	•	•			•	•	
3522	46			•	•	•			•	•	
3531	47			•	•	•			•	•	
3532	26			•	•	•			•	•	
3534	69			•	•	•			•	•	
3537	77			•	•	•			•	•	
3538	11		•	•	•	•			•	•	
3542	75			•	•	•			•	•	
3548	44			•	•	•			•	•	
3554	77			•	•	•			•	•	
3555	59			•	•	•			•	•	
3561	25	•		•	•	•			•	•	
3565	47			•	•	•			•	•	

STYLE #	Prod Pg	ST	AT	NT	☔	☁	PR	MT	SR	EH	SD
3574	26		•	•	•	•			•	•	
3581	74		•	•	•	•			•	•	
3582	27		•	•	•	•			•	•	
3583	27		•	•	•	•			•	•	
3590	47		•	•	•	•			•	•	
3591	46	•		•	•	•			•	•	
3592	59	•		•	•	•			•	•	
3596	69			•	•	•			•	•	
3597	75			•	•	•			•	•	
3598	71	•		•	•	•			•	•	
4200	48	•		•	•	•			•	•	
4215	28	•		•	•	•			•	•	
4216	32			•	•	•			•	•	
4404	24	•		•	•	•			•	•	
4421	68			•	•	•			•	•	
4433	68	•		•	•	•			•	•	
4435	70	•		•	•	•			•	•	
4436	71	•		•	•	•			•	•	
4441	61	•		•	•	•			•	•	
4442	45	•		•	•	•			•	•	
4448	61	•		•	•	•			•	•	
4456	69			•	•	•			•	•	
4470	63	•		•	•	•			•	•	
4499	71	•		•	•	•			•	•	
5007	23		•	•	•	•			•	•	
5010	23		•	•	•	•			•	•	
5050	16	•		•	•	•			•	•	
5057	16	•		•	•	•			•	•	•
5058	17	•		•	•	•			•	•	•
5059	17	•		•	•	•			•	•	
5080	16	•		•	•	•			•	•	
5108	81		•	•	•	•			•	•	
5152	82	•		•	•	•			•	•	
5161	82	•		•	•	•			•	•	
5163	81	•		•	•	•			•	•	
5164	79	•		•	•	•			•	•	
5168	80	•		•	•	•			•	•	
5170	81	•		•	•	•			•	•	
5171	79		•	•	•	•			•	•	
5172	80	•		•	•	•			•	•	•
5179	82			•	•	•			•	•	
5180	79	•		•	•	•			•	•	
5181	82	•		•	•	•			•	•	
5187	79	•		•	•	•			•	•	•
5188	80	•		•	•	•			•	•	•
5266	43			•	•	•			•	•	
5421	72	•		•	•	•			•	•	
5424	43	•		•	•	•			•	•	
5427	18	•		•	•	•			•	•	
5486	72	•		•	•	•			•	•	
5491	72	•		•	•	•			•	•	
5494	16		•	•	•	•			•	•	
5495	23	•		•	•	•			•	•	
5496	18	•		•	•	•			•	•	
5497	17	•		•	•	•			•	•	•

FOOTWEAR INDEX

STYLE #	Prod Pg	ST	AT	NT	WP	INS	PR	MT	SR	EH	SD
5501	23	•							•	•	
5540	42		•					•	•	•	
5611	42		•	•					•	•	
5634	41	•		•					•	•	
5647	43	•							•	•	
5650	43		•						•	•	
5670	42	•							•	•	
5671	42	•							•	•	
5700	67	•		•					•	•	
5702	67	•		•					•	•	
5705	55		•			•			•	•	
5813	54	•		•	•				•	•	
5840	55		•			•			•	•	
5865	55	•							•	•	
5909	41	•		•		•			•	•	
5910	55	•		•		•			•	•	
5911	72	•		•		•	•		•	•	
5919	81	•		•		•			•	•	
5940	17	•				•			•	•	
5941	80	•				•			•	•	
6338	19		•						•	•	
6343	20		•						•	•	
6344	20		•						•	•	
6349	20		•	•					•	•	
6352	20		•						•	•	
6513	18		•						•	•	
6550	18		•						•	•	
6614	21		•	•					•	•	
6670	28	•		•					•	•	
6674	29		•	•					•	•	
6692	21		•						•	•	
6705	12		•						•	•	
6708	14		•						•	•	
83120	15		•						•	•	
83126	15		•			•			•	•	
83130	15		•						•	•	
83242	77		•						•	•	
83244	78		•	•					•	•	
83246	78		•						•	•	
83250	78		•	•					•	•	
83268	78	•		•					•	•	
83440	22		•						•	•	
83602	35		•	•		•			•	•	
83606	40		•						•	•	
83608	41	•							•	•	
83612	41	•							•	•	
83614	36		•	•					•	•	
83616	35		•	•	•				•	•	
83618	40	•		•					•	•	
83620	37		•	•					•	•	
83622	37		•	•					•	•	
83628	37		•	•					•	•	
83630	37		•	•					•	•	
83632	38		•	•					•	•	
83636	38		•	•					•	•	

STYLE #	Prod Pg	ST	AT	NT	WP	INS	PR	MT	SR	EH	SD
83642	38		•	•					•	•	
83644	71		•	•				•	•	•	
83652	40		•						•	•	
83658	38		•	•					•	•	
83668	39		•	•					•	•	
83670	36		•	•					•	•	
83672	36		•	•					•	•	
83674	35		•	•			•		•	•	
83676	39		•	•					•	•	
83678	22		•	•					•	•	
83680	22		•	•					•	•	
83684	22		•	•					•	•	
83686	39		•	•					•	•	
83688	39		•	•					•	•	
83690	4035		•	•					•	•	
83692	36	•		•					•	•	
83696	53	•		•					•	•	
83802	53		•	•					•	•	
83832	57		•	•					•	•	
83834	54	•		•					•	•	
83852	52	•		•					•	•	
83856	52		•	•		•			•	•	
83858	51		•	•		•			•	•	
83862	51		•	•	•	•			•	•	
83864	52		•	•	•	•			•	•	
83866	54		•	•	•	•			•	•	
83870	54	•		•					•	•	
83872	53	•		•	•				•	•	
83876	52		•	•					•	•	
83882	53		•	•		•			•	•	
83884	51		•	•					•	•	
83886	51		•	•	•	•			•	•	
83898	63		•	•	•	•			•	•	
83906	63	•		•					•	•	
83908	63		•						•	•	
83912	64	•		•					•	•	
83930	65	•		•					•	•	
83936	64		•	•					•	•	
83938	64	•		•					•	•	
83956	64	•		•					•	•	
83966	65		•	•					•	•	
83972	65		•	•					•	•	
83974	67	•		•					•	•	
83976	64	•		•					•	•	
83978	65	•		•					•	•	
83990	66		•	•					•	•	
83992	66		•	•					•	•	
83994	66		•	•					•	•	
83996	66		•	•					•	•	
83998	67		•	•					•	•	

ICON REFERENCE



STEEL TOE

Tempered steel toe caps.



ALUMINUM TOE

Durable, aluminum toe caps are 31% lighter than steel.



NON-METALLIC TOE

Non-metallic toe caps designed for metal sensitive areas.



WATERPROOF

Boot construction that keeps feet dry in wet conditions.



INSULATED

Layers of insulating components provide warmth.



PUNCTURE-RESISTANT

Non-metallic or steel midsole reduces foot injuries due to sole puncture.



METATARSAL GUARD

Equipped with a guard that protects the metatarsal area and toes from falling objects.



SLIP RESISTANT

Standard for performance requirements when evaluating slip resistance of protective footwear using a certified whole shoe test method.



ELECTRICAL HAZARD

Extra protection from accidental contact with electrically energized objects.



STATIC-DISSIPATIVE

Helps control the amount of electrical discharge from the body, ideal for sensitive electronic environments.

RED WING STYLES

IRISH SETTER STYLES

WORX STYLES

New Product (bold)

RED WING FOR BUSINESS

Let's get started today.

redwingsafety.com

1 (800) 239-1064



RED WING BRANDS OF AMERICA, INC.
RED WING FOR BUSINESS
314 MAIN STREET RED WING MN 55066
1 (800) 239-1064